



NI 43-101 Technical Report

Mineral Resource Estimate for the Ashram Rare Earth Element and Fluorspar Deposit

Nunavik, Québec, Canada

Prepared for:

Commerce Resources Corp.

Effective Date: April 4, 2024

Signature Date: July 4, 2024

Prepared by the following Qualified Persons:

- | | |
|------------------------------|------------------------|
| ■ Jeffrey Cassoff, P.Eng. | BBA Inc. |
| ■ Pierre-Luc Richard, P.Geo. | PLR Resources Inc. |
| ■ Tommee Larochelle, P.Eng. | L3 Process Development |
| ■ Jordan Zampini, P.Eng. | DRA Global Limited |





Commerce Resources Corp.

NI 43-101 Technical Report

Mineral Resource Estimate for the Ashram Rare Earth Element
and Fluorspar Deposit



Date and Signature Page

This technical report is effective as of the 4th day of April 2024.

Signed and sealed on file

Jeffrey Cassoff, P.Eng.
BBA Inc.

July 4, 2024

Date

Signed and sealed on file

Pierre-Luc Richard, P.Geo., M.Sc.
PLR Resources Inc.

July 4, 2024

Date

Signed and sealed on file

Tommee Larochelle, PE, P.Eng., MBA, PhD
L3 Process Development

July 4, 2024

Date

Signed and sealed on file

Jordan Zampini, P.Eng.
DRA Global Limited

July 4, 2024

Date



2020 Robert-Bourassa Blvd.
Suite 300
Montréal, QC H3A 2A5
T +1 514.866.2111
F +1 514.866.2116
BBA.CA

CERTIFICATE OF QUALIFIED PERSON

Jeffrey Cassoff, P.Eng.

This certificate applies to the NI 43-101 Technical Report titled "Mineral Resource Estimate for the Ashram Rare Earth Element and Fluorspar Deposit, Nunavik, Québec, Canada" (the "Technical Report"), prepared for Commerce Resources Corp., dated July 4, 2024, with an effective date of April 4, 2024.

I, Jeffrey Cassoff, P.Eng., as a co-author of the Technical Report, do hereby certify that:

1. I am a Senior Mining Engineer in the consulting firm BBA Inc. located at 2020 Robert-Bourassa Blvd., Suite 300, Montréal, Québec, Canada, H3A 2A5.
2. I graduated from McGill University with a B. Eng. in Mining in 1999.
3. I am in good standing as a member of the Order of Engineers of Québec (#5002252), the Professional Engineers and Geoscientists, Newfoundland and Labrador (#06205), and the Northwest Territories Association of Professional Engineers and Geoscientists (NAPEG Member No. L4142).
4. I have practiced my profession continuously since my graduation in 1999. My relevant experience includes open pit mining operations and many NI 43-101 studies.
5. I have read the definition of "qualified person" set out in the NI 43-101 – Standards of Disclosure for Mineral Projects (NI 43-101) and certify that, by reason of my education, affiliation with a professional association, and past relevant work experience, I fulfill the requirements to be a qualified person for the purposes of NI 43-101.
6. I am independent of the issuer applying all the tests in Section 1.5 of NI 43-101.
7. I am author and responsible for the preparation of Chapters 15 to 22 and Section 14.14. I am also co-author and responsible for the relevant portions of Chapters 1, 2, 3, 24, 25, 26 and 27 of the Technical Report.
8. I have not visited the Eldor Property that is the subject of the Technical Report, as it was not required for the purpose of this mandate.
9. I have no prior involvement with the property that is the subject of the Technical Report.
10. I have read NI 43-101 and the sections of the Technical Report for which I am responsible have been prepared following NI 43-101 rules and regulations.
11. As at the effective date of the Technical Report, to the best of my knowledge, information and belief, the sections of the Technical Report for which I am responsible contain all scientific and technical information that is required to be disclosed to make the portions of the Technical Report for which I am responsible not misleading.

Signed and sealed this 4th day of July 2024.

Signed and sealed on file

Jeffrey Cassoff, P.Eng.

CERTIFICATE OF QUALIFIED PERSON

Pierre-Luc Richard, P.Geo., M.Sc.

This certificate applies to the NI 43-101 Technical Report titled "Mineral Resource Estimate for the Ashram Rare Earth Element and Fluorspar Deposit, Nunavik, Québec, Canada" (the "Technical Report"), prepared for Commerce Resources Corp., dated July 4, 2024, with an effective date of April 4, 2024.

I, Pierre-Luc Richard, P.Geo., M.Sc., as a co-author of the Technical Report, do hereby certify that:

1. I am currently employed with the consulting firm PLR Resources Inc., located at 2000 McGill College Avenue, Suite 600, Montréal, Québec H3A 3H3.
2. I am a graduate of Université du Québec à Montréal in Resource Geology (2004). I also obtained a M.Sc. from Université du Québec à Chicoutimi in Earth Sciences in 2012.
3. I am a member in good standing of the Ordre des Géologues du Québec (OGQ Member No. 1119), the Association of Professional Geoscientists of Ontario (APGO Member No. 1714), and the Northwest Territories Association of Professional Engineers and Geoscientists (NAPEG Member No. L2465).
4. I have worked in the mining industry for more than 20 years. My exploration expertise has been acquired with Richmond Mines Inc., the Ministry of Natural Resources of Québec (Geology Branch), and numerous companies through my career as a consultant. My mining expertise was acquired at the Beaufor mine and several other producers through my career. I managed numerous technical reports, mineral resource estimates, and audits as a consultant with different firms, and for PLR Resources since 2022.
5. I have read the definition of "qualified person" set out in the NI 43-101 – Standards of Disclosure for Mineral Projects (NI 43-101) and certify that, by reason of my education, affiliation with a professional association, and past relevant work experience, I fulfill the requirements to be a qualified person for the purposes of NI 43-101.
6. I am independent of the issuer applying all the tests in Section 1.5 of NI 43-101.
7. I am author and responsible for the preparation of Chapters 1 to 12, 14 (except Section 14.14), and Chapters 23 to 27.
8. I have visited the Eldor Property that is the subject of the Technical Report on September 19 and 20, 2021, as part of this current mandate.
9. I have had prior involvement with the property that is the subject of the Technical Report, as I have been involved in the Ashram Project since 2021, and participated as a qualified person in the April 2024 MRE.
10. I have read NI 43-101 and the sections of the Technical Report for which I am responsible have been prepared following NI 43-101 rules and regulations.
11. As at the effective date of the Technical Report, to the best of my knowledge, information and belief, the sections of the Technical Report for which I am responsible contain all scientific and technical information that is required to be disclosed to make the portions of the Technical Report for which I am responsible not misleading.

Signed and sealed this 4th day of July 2024.

Signed and sealed on file

Pierre-Luc Richard, P.Geo., M.Sc.

CERTIFICATE OF QUALIFIED PERSON

Tommee La.rochelle, PE, P.Eng. MBA, PhD

This certificate applies to the NI 43-101 Technical Report titled "Mineral Resource Estimate for the Ashram Rare Earth Element and Fluorspar Deposit, Nunavik, Québec, Canada" (the "Technical Report"), prepared for Commerce Resources Corp., dated July 4, 2024, with an effective date of April 4, 2024.

I, Tommee Larochelle, PE, P.Eng., MBA, PhD, as a co-author of the Technical Report, do hereby certify that:

1. I am Principal Engineer with the consulting firm L3 Process Development, located at 3851 Boul. Gene-H. Kruger, Trois-Rivières, Québec, Canada G9A 4M4.
2. I am a graduate of the University of Sherbrooke with a Bachelor of Engineering (Chemical Engineering), of Westminster College with a Master of Business Administration and of Virginia Polytechnic and State University with a Ph.D. (Mining Engineering)
3. I am a member in good standing of the Ordre des Ingénieurs du Québec (144753) and a Registered Professional Engineer in the State of Utah (10199526-2202).
4. I have been involved in numerous process development and design projects for technology metals, and more specifically for the extraction, separation and refining of rare earth elements in the 20 years since I started my career as a consultant.
5. I have read the definition of "qualified person" set out in the NI 43-101 – Standards of Disclosure for Mineral Projects (NI 43-101) and certify that, by reason of my education, affiliation with a professional association, and past relevant work experience, I fulfill the requirements to be a qualified person for the purposes of NI 43-101.
6. I am independent of the issuer applying all the tests in Section 1.5 of NI 43-101.
7. I am author and responsible for the preparation of Section 13.2. I am also co-author and responsible for the relevant portions of Chapters 1, 2, 3, 24, 25, 26 and 27 of the Technical Report.
8. I have not visited the Eldor Property that is the subject of the Technical Report, it was not required for the purpose of this mandate.
9. I have had prior involvement with the property that is the subject of the Technical Report as I have been involved in the process development effort since 2015 as an expert in the development of extraction processes for rare earth elements.
10. I have read NI 43-101, and the sections of the Technical Report for which I am responsible have been prepared following NI 43-101 rules and regulations.
11. As at the effective date of the Technical Report, to the best of my knowledge, information and belief, the sections of the Technical Report for which I am responsible contain all scientific and technical information that is required to be disclosed to make the portions of the Technical Report for which I am responsible not misleading.

Signed and sealed this 4th day of July 2024.

Signed and sealed on file

Tommee Larochelle, PE, P.Eng., MBA, PhD



CERTIFICATE OF QUALIFIED PERSON

Jordan Zampini, P.Eng.

This certificate applies to the NI 43-101 Technical Report titled "Mineral Resource Estimate for the Ashram Rare Earth Element and Fluorspar Deposit, Nunavik, Québec, Canada" (the "Technical Report"), prepared for Commerce Resources Corp., dated July 4, 2024, with an effective date of April 4, 2024.

I, Jordan Zampini, P.Eng., as a co-author of the Technical Report, do hereby certify that:

1. I am Process Manager - Montreal / Senior Process Engineer with the consulting firm DRA Global Limited, located at 555 Blvd René-Lévesque West, 6th Floor, Montréal, Québec Canada H2Z 1B1.
2. I am a graduate McGill University, Montréal, Québec with a Bachelor of Materials Engineering (Metallurgy) in 2012
3. I am a member in good standing of the *Ordre des ingénieurs du Québec* (OIQ # 5028661).
4. My relevant experience includes working metallurgical or process engineer since 2012. I have gained relevant experience by working on projects in North America similar to the project in question.
5. I have read the definition of "qualified person" set out in the NI 43-101 – Standards of Disclosure for Mineral Projects (NI 43-101) and certify that, by reason of my education, affiliation with a professional association, and past relevant work experience, I fulfill the requirements to be a qualified person for the purposes of NI 43-101.
6. I am independent of the issuer applying all the tests in Section 1.5 of NI 43-101.
7. I am author and responsible for the preparation of Section 13.1. I am also co-author and responsible for the relevant portions of Chapters 1, 25 and 26 of the Technical Report.
8. I have visited the Eldor Property that is the subject of the Technical Report on September 21st and 22nd of 2021.
9. I have had prior involvement with the property that is the subject of the Technical Report as I participated in the supervision of metallurgical test work over in 2014-2015 and since 2021.
10. I have read NI 43-101, and the sections of the Technical Report for which I am responsible have been prepared following NI 43-101 rules and regulations.
11. As at the effective date of the Technical Report, to the best of my knowledge, information and belief, the sections of the Technical Report for which I am responsible contain all scientific and technical information that is required to be disclosed to make the portions of the Technical Report for which I am responsible not misleading.

Signed and sealed this 4th day of July 2024.

Signed and sealed on file

Jordan Zampini, P.Eng.



TABLE OF CONTENTS

List of Abbreviations and Units of Measurement	ix
List of Elements	xii
1. Summary	1
1.1 Introduction.....	1
1.2 Terms of Reference	1
1.3 Contributors.....	1
1.4 Property Description, Location and Ownership	2
1.5 Royalties and Encumbrances.....	3
1.6 Geology.....	3
1.7 Drilling since 2012	4
1.8 Data Verification	4
1.9 Mineral Processing and Metallurgical Testing.....	5
1.10 Mineral Resource estimate	6
1.11 Conclusions and Recommendations	10
2. Introduction.....	11
2.1 Scope of Study	11
2.2 Report Responsibility and Qualified Persons	11
2.3 Effective Dates and Declaration.....	13
2.4 Sources of Information.....	14
2.5 Site Visits.....	15
2.6 Currency, Units of Measure, and Calculations	15
3. Reliance on Other Experts	16
4. Property Description and Location	17
4.1 Location	17
4.2 Tenure Rights.....	26
4.3 Royalties and Related Information	28
4.4 Permits and Environmental Liabilities	28
4.5 Other Relevant Factors.....	30
5. Accessibility, Climate, Local Resources, Infrastructure and Physiography	31
5.1 Access and Infrastructure	31
5.2 Climate	32
5.3 Physiography	32
5.4 Local Resources.....	32



6. History	34
6.1 Regional Government Surveys	36
6.2 Mineral Exploration Work	36
7. Geological Setting and Mineralization	40
7.1 Regional Geology	40
7.2 Project Geology	42
7.3 Structural Geology	44
7.4 Mineralization	45
8. Deposit Types	50
9. Exploration	53
9.1 2013 Exploration Summary	53
9.1.1 Prospecting and Rock Sampling	53
9.1.2 2013 Soil Sampling	54
9.2 2015 Exploration Summary	56
9.2.1 Prospecting and Rock Sampling	56
9.2.2 Other Work (2015)	62
9.3 2016 Exploration Summary	62
9.3.1 Prospecting and Rock Sampling	62
9.3.2 Other Work (2016)	63
9.4 2017 Exploration Summary	63
9.4.1 Prospecting and Rock Sampling	64
9.4.2 Other Work (2017)	64
9.5 2018 Exploration Summary	64
9.5.1 Prospecting and Rock Sampling	65
9.6 2022 Exploration Summary	65
9.6.1 Channel Sampling	66
10. Drilling	67
10.1 Drilling Campaigns	67
10.2 Structure	82
10.3 Collar Survey	83
10.4 Downhole Survey	83
10.5 Core Logging and Sampling Procedures	83
11. Sample Preparation, Analyses, and Security	85
11.1 Sample Preparation and Analytical Procedure	85
11.2 Quality Assurance / Quality Control	86
11.2.1 Blanks	86



11.2.2	Certified Reference Materials.....	87
11.2.3	Quarter-Core Duplicates.....	90
11.2.4	Pulp Duplicates	93
11.2.5	External pulp duplicates (Secondary Laboratory Check)	96
11.3	Sample Security	99
11.4	Overall Qualified Person's Opinion	99
12.	Data Verification	100
12.1	Site Investigation.....	100
12.2	Drilling and Sampling Procedures	102
12.3	Database Validation	103
12.3.1	Assays	103
12.3.2	Drill Hole Location	103
12.3.3	Downhole Survey	103
12.3.4	QA/QC.....	103
12.4	Qualified Person's Opinion.....	103
13.	Mineral Processing and Metallurgical Testing.....	104
13.1	Mineral Processing Test Work	104
13.1.1	Introduction	104
13.1.2	Sample Selection and Characterization	104
13.1.3	Flotation Testing.....	108
13.2	Hydrometallurgical Test Work	110
13.2.1	Historical.....	110
13.2.2	Metallurgical Testing and Results.....	111
14.	Mineral Resource Estimates	114
14.1	Methodology	115
14.2	Resource Database	115
14.3	Geological Model	115
14.4	Compositing.....	116
14.5	Grade Capping.....	118
14.6	Density	124
14.7	Variogram Analysis.....	125
14.8	Block Model	132
14.9	Search Ellipsoid Strategy	133
14.10	Interpolation Method.....	135
14.11	Interpolation Parameters.....	136
14.12	Block Model Validation	137



14.13	Mineral Resource Classification	137
14.13.1	Mineral Resource Definition	137
14.13.2	Ashram Mineral Resource Definition	138
14.14	Pit Optimization and Cut-off Value	139
14.15	Ashram Mineral Resource Estimate	143
15.	Mineral Reserve Estimates	152
16.	Mining Methods	153
17.	Recovery Methods	154
18.	Project Infrastructure	155
19.	Market Studies and Contracts	156
20.	Environmental Studies, Permitting, and Social or Community Impact	157
21.	Capital and Operating Costs	158
22.	Economic Analysis	159
23.	Adjacent Properties	160
24.	Other Relevant Data and Information	161
25.	Interpretation and Conclusions	162
25.1	Mineral Resources	162
25.2	Exploration Potential	162
25.2.1	Miranna Prospect	162
25.3	Project Risks and Opportunities	165
26.	Recommendations	167
26.1	Phase 1	167
26.1.1	PEA on the Ashram Deposit	167
26.1.2	Mineral Processing Testing	167
26.1.3	Hydrometallurgical Process Development	168
26.1.4	Drilling exploration on the Niobium Targets	168
26.2	Phase 2	168
26.2.1	Definition Drilling on Ashram	168
26.3	Proposed Budget	169
27.	References	170



LIST OF TABLES

Table 1-1: Report contributors	2
Table 1-2: Selected mineral processing recoveries	5
Table 1-3: Selected hydromet processing recoveries	6
Table 1-4: Ashram Mineral Resource Estimate	8
Table 2-1: Qualified persons and areas of report responsibility	12
Table 4-1: Property claims.....	19
Table 4-2: List of mineral titles subject to royalties.....	28
Table 9-1: Summary of 2013 exploration and activities.....	53
Table 9-2: Select mineralized rock samples collected in 2013	54
Table 9-3: Select mineralized boulder samples collected from the Miranna Area in 2015	56
Table 9-4: 2022 Channel attributes	66
Table 10-1: Drilling program attributes.....	67
Table 10-2: Attributes for individual diamond drill holes completed at the Ashram Deposit	70
Table 10-3: DGI Survey summary table for selected drill holes.....	82
Table 11-1: Quartz blank results summary (2013-2022)	87
Table 11-2: Certified reference material results with OREAS 146	88
Table 11-3: Certified reference material results with OREAS 463	88
Table 11-4: Certified reference material results with TRM-2	88
Table 11-5: Certified reference material results with OREAS 465	89
Table 13-1: Chemical composition of the bulk sample	106
Table 13-2: Selected mineral processing recoveries	109
Table 13-3: Recovery of key elements by process stage.....	110
Table 13-4: Mixed rare earth oxide composition	112
Table 13-5: Selected hydromet processing recoveries	113
Table 14-1: Basic statistics on composites and high-grade capping values for the A-Zone.....	119
Table 14-2: Basic statistics on composites and high-grade capping values for the B-Zone	119
Table 14-3: Basic statistics on composites and high-grade capping values for the Breccia Classic Zone	120
Table 14-4: Density basic statistics	125
Table 14-5: Variogram model parameters obtained from the variography study for each element in the A-Zone	127
Table 14-6: Variogram model parameters used for the MRE for each element in the A-Zone	127



Table 14-7: Block model parameters	133
Table 14-8: Search ellipsoids parameters for the A-Zone	134
Table 14-9: Search ellipsoids parameters for the A-Zone	134
Table 14-10: Search ellipsoids parameters for the A-Zone	135
Table 14-11: Interpolation parameters	136
Table 14-12: Pit optimization parameters	140
Table 14-13: Metallurgical recovery of non-payables	141
Table 14-14: Ashram Mineral Resource Estimate	143
Table 14-15: Mineral resource sensitivity analysis based on NMR \$/t cut-off	145
Table 25-1: Project risks (preliminary risk assessment)	165
Table 25-2: Project opportunities	166
Table 26-1: Proposed work program budget	169

LIST OF FIGURES

Figure 4-1: Location map	18
Figure 4-2: Claim map	27
Figure 4-3: Regional location map	29
Figure 6-1: Historical work summary	35
Figure 7-1: Geological setting	41
Figure 7-2: Property geology	43
Figure 7-3: Carbonatite complex geology	44
Figure 8-1: St-Honore pipe-like carbonatite deposit	51
Figure 9-1: 2013 Soil sample data	55
Figure 9-2: 2015-2016-2017 Rock sample locations – Miranna Area (Nb ₂ O ₅)	58
Figure 9-3: 2015-2016-2017 Rock sample locations – Miranna Area (Ta ₂ O ₅)	59
Figure 9-4: 2015-2016-2017 Rock sample locations – Regional (Nb ₂ O ₅)	60
Figure 9-5: 2015-2016-2017 Rock sample locations – Regional (Ta ₂ O ₅)	61
Figure 10-1: Ashram Deposit drill hole locations	68
Figure 10-2: Mallard and Miranna drill hole locations – Magnetic first vertical derivative base map	69
Figure 11-1: Lanthanum - Quarter duplicates and original samples (2013-2022)	90
Figure 11-2: Neodymium - Quarter duplicates and original samples (2013-2022)	91



Figure 11-3: Praseodymium - Quarter duplicates and original samples (2013-2022)	91
Figure 11-4: Terbium - Quarter duplicates and original samples (2013-2022)	92
Figure 11-5: Dysprosium - Quarter duplicates and original samples (2013-2022)	92
Figure 11-6: Lanthanum - Pulp duplicates and original samples (2013-2022)	93
Figure 11-7: Neodymium - Pulp duplicates and original samples (2013-2022)	94
Figure 11-8: Praseodymium - Pulp duplicates and original samples (2013-2022)	94
Figure 11-9: Terbium - Pulp duplicates and original samples (2013-2022)	95
Figure 11-10: Dysprosium - Pulp duplicates and original samples (2013-2022)	95
Figure 11-11: Lanthanum - External pulp duplicates and original samples (2013-2021)	96
Figure 11-12: Neodymium - External pulp duplicates and original samples (2013-2021)	97
Figure 11-13: Praseodymium - External pulp duplicates and original samples (2013-2021)	97
Figure 11-14: Terbium - External pulp duplicates and original samples (2013-2021)	98
Figure 11-15: Dysprosium - External pulp duplicates and original samples (2013-2021)	98
Figure 12-1: Ashram field tour and fly-over	100
Figure 12-2: Core review during the QP site visit	101
Figure 12-3: Drill collar validation during the site visit	101
Figure 12-4: Core storage and sample preparation rooms	102
Figure 13-1: Location of bulk samples used for metallurgical testing compared to the MRE pit shell	105
Figure 13-2: Modal mineralogy of the bulk sample used for metallurgical testing	107
Figure 13-3: Bulk sample TREO assay compared to in-pit distribution	108
Figure 13-4: Flotation grade-recovery curves from selected tests at SGS	109
Figure 13-5: Sulphuric acid bake and water leach experiments	111
Figure 14-1: Overall plan view for the Ashram Deposit	114
Figure 14-2: Geological model cross-section of the Ashram Deposit highlighting carbonatite lithological domains considered in the MRE	116
Figure 14-3: Sample length distribution within the REE-bearing zones	117
Figure 14-4: Composite length distribution within the REE-bearing zones	118
Figure 14-5: Graphs supporting capping in the A-Zone for La	120
Figure 14-6: Graphs supporting capping in the A-Zone for Pr	121
Figure 14-7: Graphs supporting capping in the A-Zone for Nd	122
Figure 14-8: Graphs supporting capping in the A-Zone for Tb	123
Figure 14-9: Graphs supporting capping in the A-Zone for Dy	124
Figure 14-10: Variograms for La (ppm) for the A-Zone	128
Figure 14-11: Variograms for Pr (ppm) for the A-Zone	129



Figure 14-12: Variograms for Nd (ppm) for the A-Zone	130
Figure 14-13: Variograms for Tb (ppm) for the A-Zone	131
Figure 14-14: Variograms for Dy (ppm) for the A-Zone	132
Figure 14-15: Grade-tonnage curve with base case NMR \$287/t cut-off	146
Figure 14-16: Pit shell and mineralized footprint of Ashram's MRE, highlighting the deposit scale and drilling post-2012 MRE used to improve the MRE	148
Figure 14-17: Cross-section of the Ashram Deposit highlighting carbonatite lithological domains considered in the MRE (A-Zone, B-Zone, Breccia (Classic))	149
Figure 14-18: Cross-section showing Indicated and Inferred classifications within the block model	149
Figure 14-19: Cross-section showing the NMR \$/t distribution.....	150
Figure 14-20: Cross-section showing the TREO % distribution	150
Figure 14-21: Cross-section showing the NdPr distribution	151
Figure 14-22: Cross-section showing the TbDy distribution	151
Figure 23-1: Map of adjacent properties and operators in the vicinity of the Eldor Property.....	160
Figure 25-1: Miranna area targets	164



List of Abbreviations and Units of Measurement

Abbreviation	Description
\$ or CAD	Canadian dollar (examples of use: CAD2.5M / \$2.5M)
\$/t	dollars per metric tonne
%	percent
°C	degrees Celsius
°F	degrees Fahrenheit
µm	micron
3D	three dimensional
a	annum (year)
Actlabs	Activation Laboratories
ALS	ALS Laboratory
ATV	all-terrain vehicle
ATV-OTV	acoustic and optical televiwers (surveying)
B	billion
BBA	BBA Inc.
CIM	Canadian Institute of Mining, Metallurgy and Petroleum
Commerce	Commerce Resources Corp.
CRM(s)	certified reference material(s)
d	day (24 hours)
Dahrouge	Dahrouge Geological Consulting Ltd.
DDH	diamond drill hole
deg. or °	angular degree
DRA	DRA Global Limited
Eldor	Eldor Property (site of Ashram Deposit)
et al.	et alla (and others)
g	gram
G&A	General and Administration
GESTIM	<i>Gestion des titres miniers</i>
GNSS	Global Navigation Satellite System
GSG	Geological Survey of Canada
h	hour (60 minutes)
ha	hectare
Hazen	Hazen Research Inc.
HQ	HQ- Caliber drill hole
HREE	heavy rare earth elements (Ho, Er, Tm, Yb, and Lu)
ICP-MS	Inductively coupled plasma mass spectrometry
ID ²	inverse distance squared



Abbreviation	Description
IEC	International Electrotechnical Commission
in. or "	inch
ISE	ion selective electrode
ISO	International Organization for Standardization
JBNQA	James Bay and Northern Quebec Agreement
K	thousand
kg	kilogram
km	kilometres
KNA	kriging neighbourhood analysis
L	litre
L3	L3 Process Development
Leapfrog	Leapfrog Geo™ v.2023.2.2 ()
LIDAR	light detection and ranging
LREE	light rare earth elements (Sc, La, Ce, Pr, Nd)
m	metre
M	million
Max	maximum
MELCCFP	<i>Ministère de l'Environnement, de la Lutte contre les changements climatiques, de la Faune et des Parcs (previously known as Ministère du Développement durable, de l'Environnement et des Parcs (MDDEP))</i>
mesh	US Mesh
MHREO	middle and heavy rare earth oxide
MH-T	sum of the middle and heavy rare earth oxides divided by TREO
Min	minimum
min	minute (60 seconds)
mm	millimetre
MRE	Mineral Resource Estimate
MREE	medium rare earth elements (Sm, Eu, Gd, Y, Tb, Dy)
MRNF	<i>Ministère des Ressources naturelles et des Forêts (Minister of Natural Resources and Forests)</i>
Mt	million tonne
NI	National Instrument
NMR	net metal return
NN	nearest neighbour
No.	number
NPI	net profits interest
NQ	NQ- Caliber drill hole
NS	Nova Scotia
NSR	net smelter return



Abbreviation	Description
NTS	National Topographic System
Ø	diameter
OGQ	<i>Ordre des Géologues du Québec</i>
OIQ	<i>Ordre des Ingénieurs du Québec</i>
OK	ordinary kriging
OREAS	Ore Research & Exportation Pty Ltd. Assay Standards
oz	ounces
PEA	Preliminary Economic Assessment
PFS	Pre-feasibility Study
pH	potential of hydrogen
PLR	PLR Resources Inc.
ppm	parts per million
QA/QC	quality assurance / quality control
QP	qualified person
RE	rare earth
REE	rare earth element
REM	rare earth metals
REO	rare earth oxides
REY	rare earth elements and yttrium
RPEEE	reasonable prospects for eventual economic extraction
RQD	rock quality designation
RTK	Real Time Kinematic
s	second
S ²⁻	sulphide
Saville	Saville Resources Inc.
SECP	Southeastern Churchill Province
SEDAR+	System for Electronic Document Analysis and Retrieval
SG	specific gravity
SGS	SGS Canada in Lakefield
SEG ₂ O ₃	Sm-Eu-Gd Concentrate
Supervisor	Snowden Supervisor™ v.8.15
†	tonne (1,000 kg) (metric ton)
TCR	total core recovery
the Company	Commerce Resources Corp.
TIMA-X	Tescan Integrated Mineral Analyzer
TREM	total rare earth metal
TREO	total rare earth oxide grade
U-Pb dating	uranium–lead dating



Abbreviation	Description
USD	United States dollar (examples of use: USD2.5M)
UTM	Universal Transverse Mercator
Virginia	Virginia Gold Mines Inc.
XRF	x-ray fluorescence
y	year (365 days)

List of Elements

Element	Description	Element	Description
Ag	silver	Na	sodium
Al ₂ O ₃	aluminium oxide	Nb	niobium
Au	gold	Nb ₂ O ₅	niobium pentoxide
BaO	barium oxide	Nb-Ta	niobium and tantalum (columbite)
C	carbon	Nd	neodymium
Ca	calcium	Ni	nickel
CaF ₂	fluorspar (fluorite)	P ₂ O ₅	phosphorus pentoxide
CaO	lime	Pr	praseodymium
Ce	cerium	Rb	rubidium
Co	cobalt	S	sulphur
CO ₂	carbon dioxide	SiO ₂	silicon dioxide / silica
Cu	copper	Sm	samarium
Dy	dysprosium	Ta	tantalum
Er	erbium	Ta ₂ O ₅	tantalum pentoxide
Eu	europium	Tb	Terbium
F	fluorine	Ti	titanium
Fe	iron	TiO ₂	titanium dioxide
Fe ₂ O ₃	iron(III) oxide	Tl	thallium
Gd	gadolinium	Tm	thulium
Ho	holmium	U	uranium
In	indium	V	vanadium
K	potassium	W	tungsten
K ₂ O	potassium oxide	Y	yttrium
La	lanthanum	Yb	ytterbium
Lu	lutetium	Zr	zirconium
Mg	magnesium		
MgO	magnesium oxide		
Mo	molybdenum		



1. Summary

1.1 Introduction

The following Report presents the results of the Mineral Resource Estimate for the Ashram Rare Earth Element and Fluorspar Deposit ("Ashram Deposit" or "Ashram"). Commerce Resources Corp. ("Commerce" or the "Company") mandated engineering consulting group BBA Inc. to lead and perform the Mineral Resource Estimate (MRE), based on contributions from a number of independent consulting firms including PLR Resources Inc., L3 Process Development, and DRA Global Limited.

1.2 Terms of Reference

This Report supports the disclosure in Commerce's news release dated May 22, 2024, titled "Commerce Resources Announces Significant Increase in Indicated Mineral Resource for the Ashram Rare Earth & Fluorspar Deposit, Quebec". The effective date of the Report is April 4, 2024.

All measurement units used in this Report are metric. Currency is expressed in Canadian dollars ("CAD" or "\$") unless otherwise noted.

As of the effective date of this Report, the authors of this Report (the "Report Authors") are not aware of any known litigation potentially affecting the Project. The QPs did not verify the legality or terms of any underlying agreement(s) that may exist concerning the Project ownership, permits, off-take agreements, license agreements, royalties or other agreement(s) between Commerce and any third parties.

The opinions contained herein are based on information collected during investigations by the QPs, which in turn reflects various technical and economic conditions at the time of writing. Given the nature of the mining business, these conditions can change significantly over relatively short periods of time. Consequently, actual results can be significantly more or less favourable.

1.3 Contributors

The qualified persons (QPs) and their respective areas of responsibility are presented in Table 1-1.



Table 1-1: Report contributors

Qualified Person / Consulting Firm	General Overview of Responsibilities
BBA Inc.	
▪ Jeffrey Cassoff, P.Eng.	▪ Pit constrained cut-off grade and pit optimization
PLR Resources Inc.	
▪ Pierre-Luc Richard, P.Geo.	▪ Technical report lead ▪ QP Site visit ▪ Description of historical work ▪ Description of geology ▪ Description of deposit type ▪ Description of exploration and drilling programs ▪ Drill hole Database validation ▪ Updated Mineral Resource Estimate ▪ Interpretation of the results and production of conclusions leading to recommendations to improve value and reduce risks ▪ Recommendations for additional studies and data collection to advance the Project.
L3 Process Development	
▪ Tommee Larochelle, P.Eng.	▪ Hydrometallurgical test work
DRA Global Limited	
▪ Jordan Zampini, P.Eng.	▪ Mineral Processing test work

1.4 Property Description, Location and Ownership

The Eldor Property is situated approximately 130 km south of the Inuit community of Kuujuaq, QC, directly adjacent to the western shore of Lac Le Moyne, covering portions of NTS map sheets 24C16 and 24F01. The Property is located on Category III land within the Nunavik Territory, as defined under the James Bay and Northern Quebec Agreement (JBNQA).

The Property was acquired to cover the postulated extent of the Eldor Carbonatite Complex. Rare earth elements (REEs) are the main commodity of interest. However, the Property contains significant potential for niobium, tantalum, phosphate, and fluorspar.

The Property's size consists of one contiguous block totalling 244 claims (11,474.70 ha). Commerce is the sole registered title holder with 100% interest in the claim block.

Of the 244 claims, eight form the original Property claim acquisition and are subject to third-party royalty interests with partial buyback provisions.



1.5 Royalties and Encumbrances

The original eight claims acquired from Virginia Gold Mines Inc. (Virginia) are subject to a 1% NSR royalty in favour of Virginia and a 5% NPI royalty in favour of two individuals. Commerce has the right to buy back the 5% NPI royalty in consideration of \$500,000. The Ashram Rare Earth Deposit is not situated within the Virginia claims and is not subject to any royalties.

1.6 Geology

The Eldor Property is located in the Paleoproterozoic New Quebec Orogen, which is interpreted to be the western margin of the Southeastern Churchill Province (SECP). The New Quebec Orogen is bound to the west by the Archean Superior Province, to the south by the Proterozoic Grenville Province, and extends as far as Ungava Bay to the north. To the east, the New Quebec Orogen is in contact with a composite terrain of the SECP named the Core Zone, composed of Archean and Paleoproterozoic lithologies.

In general, metamorphic grade increases from west to east across the orogeny. The foreland passes from sub-greenschist to upper greenschist facies and the hinterland from upper greenschist, amphibolite and/or granulite facies. The carbonatite suite of rocks has undergone greenschist facies metamorphism. The Eldor Complex and its surrounding rocks, were deformed during the Hudsonian Orogeny along with the rocks of the Kaniapiskau Supergroup.

The geology of the Eldor Carbonatite is very complex, with several lithological subdivisions proposed/identified and separate eruptive centres postulated. More recent interpretation indicates the carbonatite was emplaced as sills and dykes over multiple intrusive stages, brecciating and metasomatizing the local host rocks. Multiple stages of crosscutting phoscorite (apatite, olivine, $\pm$ magnetite) and calcite carbonatite intrusions characterize the main complex.

Pyrochlore-group minerals are the dominant host of niobium and tantalum in the primary carbonatite and phoscorite, while columbite-(Fe) and niobaeschynite-(Ce) are the dominant host in the altered carbonatite and phoscorite. Magnetite, apatite, and biotite are the most common accessory minerals associated with the pyrochlore-group minerals, while apatite, fluorite, and pyrite are the most common accessory minerals associated with columbite-(Fe) and niobaeschynite-(Ce).

An REE-mineral bearing dolomite carbonatite was emplaced in the centre of the complex as a final stage of development and characterizes the Ashram Deposit. The intrusion is interpreted to be an ~500-m-wide pipe-like body of REE-rich Fe-rich dolomite – ankerite - siderite carbonatite with accessory fine-grained apatite, fluorite, and monazite. Their body extends throughout the complex as common narrow dykes.



The REE mineralization at Ashram is hosted primarily (essentially 100%) by monazite, with minor rare earth fluorocarbonates (bastnäsite, parisite, and lesser synchysite) and lesser xenotime. Rare earth mineralization at Ashram is consistent throughout the Deposit with minimal dilution from unmineralized fragments and clasts.

1.7 Drilling since 2012

Seven diamond drilling exploration programs (2013, 2014, 2015, 2016, 2019, 2021, and 2022) were completed on the Project since the previous MRE (2012). Except for 2019, every program had some diamond drill holes targeting the Ashram Deposit to define its footprint and improve the geological model confidence.

The sample preparation, analytical procedures, and security of the samples during these procedures followed industry best practices. Sufficient efforts were made to identify items that were out of specification. The quality assurance / quality control (QA/QC) data indicates that the overall assay results from the Company's drilling program are valid and can be relied upon for the purpose of this Report. It is the QP's opinion that the sample preparation, analyses and security procedures are adequate and follow best practices.

1.8 Data Verification

The Mineral Resource Estimate in this Report is based on drill data from 2008 to 2022.

For the purpose of this MRE, the QP performed a basic validation on the entire database. All data were provided by Commerce in UTM NAD 83 Zone 19. The database close-out date for the resource estimate is December 19, 2023.

The Ashram database contains 213 surface diamond drill holes, six surface channels and 32,962 samples. Of these 213 drill holes, 117, for a total of 28,783 m, were used to interpolate the block model.

Pierre-Luc Richard visited the Project from September 19 to 20, 2021. The site visit included a visual inspection of cores drilled by Commerce, as well as a field tour and discussions of the geological interpretations with geologists employed by Commerce. The site visit also included a review of sampling and assaying procedures, the QA/QC program, downhole survey methodologies, and the descriptions (logging) of lithologies, alteration and structures. Selected drill collars in the field were also validated using a handheld GPS.

The QP reviewed several sections of mineralized core while visiting the Project. All core boxes were labelled and properly stored. In the reviewed core boxes, sample tags were present, and it was possible to validate sample numbers and confirm the presence of mineralization in witness half-core samples from the mineralized zones



Drilling was not underway during Mr. Richard's site visit, but the Commerce's geological consultants involved during the drilling programs explained the entire path of the drill core, from the drill rig to the logging and sampling facility and finally to the laboratory.

The QP is of the opinion that the drilling protocols in place are adequate. The database for the Project is of good overall quality. Some recommendations for improvement have been made during the validation process, but have no material impact on the current MRE. In the QP's opinion, the Ashram database is suitable for mineral resource estimation.

1.9 Mineral Processing and Metallurgical Testing

A number of mineral processing test work programs have been carried out on the Ashram Project to develop a beneficiation flowsheet to produce a rare earth mineral concentrate suitable for hydrometallurgical processing. The objective of the test work programs completed varied, with some investigating generating a high-grade mineral concentrate, others investigated producing a lower-grade mineral concentrate while maximizing REE recovery and generating a fluorspar by-product. The current objective of the beneficiation flowsheet is to create a high-grade mineral concentrate to reduce the complexity and cost of the hydrometallurgical processing.

An ongoing program is being completed at SGS Canada in Lakefield (SGS). This work has not yet been reported on and has been based on a beneficiation flowsheet development work completed by CanmetMINING in which a high-grade mineral concentrate was produced using a relatively simple flotation scheme.

Table 1-2 shows the individual recoveries considered for this MRE and is based on full TREO assays.

Table 1-2: Selected mineral processing recoveries

Element	Recovery	Element	Recovery
La	63.7	Dy	47.1
Ce	63.0	Ho	42.6
Pr	62.0	Er	34.4
Nd	62.1	Tm	30.2
Sm	60.1	Yb	26.7
Eu	58.9	Lu	27.5
Gd	57.5	Y	33.2
Tb	52.1	TREO	62.1



Sulphuric acid bake and water leach experiments were performed at L3 using flotation concentration supplied by SGS. Acid bake and water leach recoveries were in line with previously reported recoveries by Hazen, although at much lower acid dosages.

Table 1-3 shows the individual recoveries considered for this MRE and is based on relevant REE assays.

Table 1-3: Selected hydromet processing recoveries

Element	Recovery
La, Ce, Pr, Nd	95.0
Sm, Eu, Gd	88.0
Tb, Dy, Y	82.0
Ho to Lu	82.0

1.10 Mineral Resource estimate

This MRE covers the Ashram deposit. Leapfrog Geo™ v.2023.2.2 was used to model the geological and mineralized zones and to generate the drill hole intercepts for each solid. Leapfrog was used for compositing, 3D block modelling and interpolation. Statistical studies were conducted using Excel and Snowden Supervisor™ v.8.15.

The methodology used to estimate the mineral resources involved the following steps:

- Database verification;
- 3D modelling of the geological units;
- 3D modelling of the mineralized zones;
- Drill hole intercept and composite generation;
- Basic statistics;
- Capping;
- Geostatistical analysis including variography;
- Block modelling and grade interpolation;
- Block model validation;
- Mineral resource classification;
- Cut-off grade calculation and pit shell optimization;
- Preparation of the mineral resource statement.



Wireframes were constructed by Commerce geologists in Leapfrog Geo™ with only minor modifications made by the QP during his review of the geological model. The model comprises four REE-bearing zones (A-Zone, B-Zone, Breccia Classic, and BD-Zone), as well as three lithological groups (Carbonatites, Metavolcanics, and Lamprophyre). Only three of the REE-bearing zones were interpolated and considered for this MRE, the BD-Zone requiring additional metallurgical studies due to its different REE-bearing mineralogy before being considered for mineral resources.

The interpolation was run on a set of points extracted from the capped composited data. The block model grades were estimated using the ordinary kriging (OK) method. Hard boundaries were applied between the mineralized zones individually and between surrounding country rocks to prevent grades from adjacent lithologies from being used during interpolation. As a block was estimated, it was tagged with the corresponding pass number, slope of the regression value, kriging efficiency, number of composites used, number of drill holes used, and drill spacing.

A kriging neighbourhood analysis (KNA) was conducted on the mineralized zone with Snowden Supervisor™ software. KNA provides a quantitative method of testing different estimation parameters (i.e., block size, discretization and min/max of composites used for the interpolation) by evaluating their impact on the quality of the results. This analysis helps select the optimal value for each parameter.

The block model was validated using several methods, including statistical analyses and a visual review of the grades in the associated drill hole. Based on these visual and statistical reviews, it is the QP's opinion that the Ashram block model provides a reasonable estimate of in situ mineral resources.

The mineral resources were classified according to CIM Definition Standards. The estimated block grades were classified as either Inferred or Indicated using the drill spacing, geological continuity of mineralization, grade continuity, and overall confidence level. No Measured Mineral Resources were defined for this phase of the Project.

Inferred Mineral Resources were defined for blocks within the A-Zone, B-Zone, and Breccia Classic zones with a drill spacing of 200 m or better.

Indicated Mineral Resources were defined where the following criteria were met:

- Drill spacing of 70 m or less (most of the Indicated Resource is 50 m or less);
- Demonstrated geological continuity;
- Grade continuity at the reported cut-off grade.

When needed, a series of clipping boundaries were created manually to either upgrade or downgrade classification to avoid issues caused by automatically generated classification. All remaining estimated but unclassified blocks were not reported.



The Ashram MRE (Table 1-4) was prepared by Pierre-Luc Richard (P.Geo.) of PLR, with contributions from Jeffrey Cassoff (P.Eng.) of BBA Inc. for the cut-off grades and pit shell optimization, Tommee Larochelle (P.Eng.) of L3 Process Development for the hydrometallurgical parameters and Jordan Zampini (P.Eng.) of DRA Global Limited for the mineral processing parameters. The QP considers the MRE reliable and based on quality data, reasonable hypotheses and parameters that follow CIM Definition Standards. After completing the MRE and performing a detailed review of all pertinent information, the QPs concluded the following:

- Using a cut-off, expressed as a net metal return (NMR) of \$287/t the Indicated Mineral Resources amount to 73.2 Mt at 1.89% TREO and 6.6% CaF₂.
- Using a cut-off, expressed as a NMR of \$287/t the Inferred Mineral Resources amount to 131.1 Mt at 1.91% TREO and 4.0% CaF₂.

Table 1-4: Ashram Mineral Resource Estimate

Cut-off NMR		\$287/t	
Category		Indicated	Inferred
Tonnes	Mt	73.2	131.1
Total TREO	%	1.89	1.91
Nd+Pr Oxide/TREO		21.2	21.4
Tb+Dy Oxide/TREO		0.7	0.5
La₂O₃	ppm	4,829	4,969
Ce ₂ O ₃		8,753	8,933
Pr₂O₃		907	927
Nd₂O₃		3,112	3,162
Sm ₂ O ₃		412	385
Eu ₂ O ₃		98	87
Gd ₂ O ₃		223	195
Tb₂O₃		24	19
Dy₂O₃		102	73
Ho ₂ O ₃		14	10
Er ₂ O ₃		31	21
Tm ₂ O ₃		3	2
Yb ₂ O ₃		18	13
Lu ₂ O ₃		2	2
Y ₂ O ₃		419	280
Fluorspar (CaF ₂)	%	6.6	4.0



Notes on the Ashram Resource table (Table 1-4):

1. Mineral resources are not mineral reserves as they have not demonstrated economic viability. The quantity and grade of reported Inferred Resources in this MRE are uncertain in nature and there has been insufficient exploration to define these Inferred Resources as Indicated or Measured. However, it is reasonably expected that the majority of Inferred Mineral Resources could be upgraded to Indicated Mineral Resources with continued exploration.
2. Resources are presented as undiluted and in situ for an open-pit scenario and are considered to have reasonable prospects for eventual economic extraction. The constraining pit shell was developed using an overall pit slope of 52 degrees, and the resulting strip ratio is 2.7:1.
3. Three-dimensional modelling was prepared using Leapfrog Geo v.2023.2.1 with a database of 213 surface drill holes, six surface channels and 32,962 samples, of which 117 drill holes and a total of 18,495 assays were used to interpolate the block model mineralized zones.
4. Resources encompass three REE-bearing zones (A-zone, B-Zone, and Breccia (Classic)), each defined by wireframes. A value of zero grade was applied in cases of core not assayed.
5. High-grade capping was done on the composited assay data and established on a per-zone basis for each element.
6. Density values were interpolated using ordinary kriging for four rock types in the geological model, including the three mineralized rock types (A-Zone, B-Zones and Breccia (Classic)), with density averages of 3.08 g/cm³ for A-Zone, 3.00 g/cm³ for B-Zone, 3.05 g/cm³ for Breccia (Classic), and 2.92 g/cm³ for BD-Zone. Surrounding country rock lithologies were given a fixed density value from their range median values: Carbonatites ranging from 2.85 g/cm³ to 2.97 g/cm³, Metavolcanic = 2.84 g/cm³, and Lamprophyre = 2.97 g/cm³. Grade model resource estimation was interpolated from drill hole data using an OK interpolation method in a sub-blocked block model using blocks measuring 5 m x 5 m x 5 m in size and sub-blocks down to 1.25 m x 1.25 m x 1.25 m.
7. The MRE cut-off, expressed as a NMR value, was calculated to be CAD154/t, which is based on a 3-year annualized average (2021, 2022 and 2023) for the five payable oxides; (USD1.25/kg for La₂O₃, USD95/kg for Pr₂O₃, USD95/kg for Nd₂O₃, USD1,500/kg for Tb₂O₃, and USD375/kg for Dy₂O₃), estimated metal recoveries, and operating costs for mining, processing, transportation and G&A. A cut-off of CAD287/t is considered as the base case for the MRE and is guided by reasonable prospects of eventual economic extraction over a reasonable timeframe. The cut-off grade considers a CAD:USD exchange rate of 1.30. Metal prices sourced from Adamas Intelligence's Rare Earth Pricing Quarterly Outlook (Q1 2024).
8. Inferred mineral resources are constrained to areas where drill spacing is less than 200 m, and where reasonable geological and grade continuity is shown. Indicated mineral resources are constrained to areas where drill spacing is less than 70 m, and where reasonable geological and grade continuity is displayed
9. An open-pit mining method was considered for the MRE and a conceptual pit shell to constrain the resources was developed using Hexagon's MinePlan 3D software, Version 16.05.
10. TREO is the sum of lanthanides (as oxides) + yttrium oxide. NdPr distribution is calculated as (Nd₂O₃ + Pr₂O₃) / TREO x 100. TbDy distribution calculated as (Tb₂O₃ + Dy₂O₃) / TREO x 100. CaF₂ is calculated from fluorine assay using factor of 2.055 (F to CaF₂) and assumes all fluorine is contained within the mineral fluorite ("fluorspar").
11. Calculations used metric units (metre, tonne). Metric tonnages have been rounded, and any discrepancies in total amounts are due to rounding errors.
12. CIM definitions and guidelines (2019) for Mineral Resource Estimates have been followed.
13. The QPs are unaware of any known environmental, permitting, legal, title-related, taxation, socio-political or marketing issues or any other relevant issues that could materially affect this MRE.



1.11 Conclusions and Recommendations

The Ashram Project demonstrates a strong potential for growth, with the Eldor Property showing a strong potential for additional significant discovery of niobium-tantalum mineralization; most notably from the Mallard and Miranna Prospect within the Southeast Area.

The Ashram Deposit is one of the largest rare earth deposits globally. Furthermore, the deposit hosts a monazite dominant rare earth mineralogy with demonstrated mineral processing ability to produce high-grade (+30% REO) monazite mineral concentrates using conventional process techniques. Additionally, the Ashram Deposit has a fluorspar component that makes it one of the largest potential sources of fluorspar in the world.

The QPs recommend that the Project proceeds to the next phase of project development through a Preliminary Economic Assessment (PEA), and that there is significant potential on the Property to delineate additional resources and that further drilling and exploration are warranted.

The following proposed work program will help advance the Property and provide key inputs needed to evaluate its economic viability:

- Phase 1:
 - PEA on the Ashram Deposit;
 - Mineral processing testing;
 - Hydrometallurgical process development;
 - Drilling exploration on the niobium targets.
- Phase 2:
 - Definition drilling on Ashram.

The estimated cost for the recommended work program is approximately \$10.4M for Phase 1 and \$13.0M for Phase 2 for a total of \$23.3M, based on certain assumptions and current site costs. The estimate includes a 15% contingency.



2. Introduction

The following Report presents the results of the Mineral Resource Estimate for the Ashram Rare Earth Element and Fluorspar Deposit ("Ashram Deposit" or "Ashram"). Commerce Resources Corp. ("Commerce" or the "Company") mandated engineering consulting group BBA Inc. (BBA) to lead and perform the Mineral Resource Estimate (MRE), based on contributions from a number of independent consulting firms including PLR Resources Inc. (PLR), L3 Process Development (L3), and DRA Global Limited (DRA).

As of the date of this Report, Commerce is a Canadian mineral exploration company trading on the TSXV under the trading symbol (CCE), FSE under the trading symbol (D7H0), and OTCQX under the trading symbol of CMRZF with its head office situated at:

Suite 1450 - 789 West Pender Street
Vancouver, BC
Canada V6C 1H2

This Report, titled Mineral Resource Estimate for the Ashram Rare Earth Element and Fluorspar Deposit (referred to as the "Report"), was prepared by qualified persons (QPs) following the guidelines of the NI 43-101 and of the Canadian Institute of Mining, Metallurgy and Petroleum (CIM) Standards on Mineral Resources and Reserves.

2.1 Scope of Study

The following technical report presents the results of the updated MRE for the Ashram Deposit.

The Report was prepared by qualified persons (QPs) following the guidelines of National Instrument 43-101 (NI 43-101) and the Canadian Institute of Mining, Metallurgy and Petroleum (CIM) Definition Standards on Mineral Resources and Reserves.

2.2 Report Responsibility and Qualified Persons

The following individuals, by virtue of their education, experience and professional association, are considered QPs as defined in NI 43-101, and are members in good standing of appropriate professional institutions.

- | | |
|---|-----------------------------|
| ■ Jeffrey Cassoff, P.Eng. | BBA Inc. (BBA) |
| ■ Pierre-Luc Richard, P.Geo., M.Sc. | PLR Resources Inc. (PLR) |
| ■ Tommee Larochelle, PE, P.Eng., MBA, PhD | L3 Process Development (L3) |
| ■ Jordan Zampini, P.Eng. | DRA Global Limited (DRA) |



The preceding QPs have contributed to the writing of this Report and have provided QP certificates, included at the beginning of this Report. The information contained in the certificates outlines the sections in this Report for which each QP is responsible. Each QP has also contributed figures, tables and portions of Chapters 1 (Summary), 2 (Introduction), 3 (Reliance on Other Experts), 24 (Other Relevant Data and Information), 25 (Interpretation and Conclusions), 26 (Recommendations), and 27 (References). Table 2-1 outlines the responsibilities for the various sections of the Report and the name of the corresponding Qualified Person.

Table 2-1: Qualified persons and areas of report responsibility

Chapter	Description	Qualified Person	Company	Comments and Exceptions
1.	Summary	P.-L. Richard	PLR	All QPs contributed based on their respective scope of work and the Chapters / Sections under their responsibility.
2.	Introduction	P.-L. Richard	PLR	All QPs contributed based on their respective scope of work and the Chapters / Sections under their responsibility.
3.	Reliance on Other Experts	P.-L. Richard	PLR	All QPs contributed based on their respective scope of work and the Chapters / Sections under their responsibility.
4.	Project Property Description and Location	P.-L. Richard	PLR	
5.	Accessibility, Climate, Local Resource, Infrastructure and Physiography	P.-L. Richard	PLR	
6.	History	P.-L. Richard	PLR	
7.	Geological Setting and Mineralization	P.-L. Richard	PLR	
8.	Deposit Types	P.-L. Richard	PLR	
9.	Exploration	P.-L. Richard	PLR	
10.	Drilling	P.-L. Richard	PLR	
11.	Sample Preparation, Analyses and Security	P.-L. Richard	PLR	
12.	Data Verification	P.-L. Richard	PLR	
13.	Mineral Processing and Metallurgical Testing	J. Zampini	DRA	Section 13.1
		T. Larochelle	L3	Section 13.2
14.	Mineral Resource Estimate	P.-L. Richard	PLR	All except Section 14.14
		J. Cassoff	BBA	Section 14.14
15.	Mineral Reserve Estimate	J. Cassoff	BBA	
16.	Mining Methods	J. Cassoff	BBA	
17.	Recovery Methods	J. Cassoff	BBA	
18.	Project Infrastructure	J. Cassoff	BBA	



Chapter	Description	Qualified Person	Company	Comments and Exceptions
19.	Market Studies and Contracts	J. Cassoff	BBA	
20.	Environmental Studies, Permitting, and Social or Community Impact	J. Cassoff	BBA	
21.	Capital and Operating Costs	J. Cassoff	BBA	
22.	Economic Analysis	J. Cassoff	BBA	
23.	Adjacent Properties	P.-L. Richard	PLR	
24.	Other Relevant Data and Information	P.-L. Richard	PLR	All QPs contributed based on their respective scope of work and the Chapters / Sections under their responsibility.
25.	Interpretation and Conclusions	P.-L. Richard	PLR	All QPs contributed based on their respective scope of work and the Chapters / Sections under their responsibility.
26.	Recommendations	P.-L. Richard	PLR	All QPs contributed based on their respective scope of work and the Chapters / Sections under their responsibility.
27.	References	P.-L. Richard	PLR	All QPs contributed based on their respective scope of work and the Chapters / Sections under their responsibility.

2.3 Effective Dates and Declaration

This Report supports the Commerce press release of May 22, 2024, titled "Commerce Resources Announces Significant Increase in Indicated Mineral Resource for the Ashram Rare Earth & Fluorspar Deposit, Quebec".

The effective date of the Report is April 4, 2024.

The effective date of the MRE is April 4, 2024.

The quality of the information, conclusions and estimates contained in this Report is consistent with the level of effort involved in the Report Authors' services based on: i) the information available at the time of preparation; ii) the data supplied by outside sources; and iii) the assumptions, conditions, and qualifications set forth in this Report. This Report is intended for use by Commerce subject to the terms and conditions of its respective contracts with the Report Authors. Except for the purposes legislated under Canadian, provincial, and territorial securities law, any other use of this Report by any third party is at that party's sole risk.



As of the effective date of this Report, the QPs are not aware of any known litigation potentially affecting the Project. The QPs did not verify the legality or terms of any underlying agreement(s) that may exist concerning the Project ownership, permits, off-take agreements, license agreements, royalties or other agreement(s) between Commerce and any third parties.

The opinions contained herein are based on information collected during the investigations by the QPs, which in turn reflects various technical and economic conditions at the time of writing. Given the nature of the mining business, these conditions can change significantly over relatively short periods of time. Consequently, actual results can be significantly more or less favourable.

2.4 Sources of Information

This Report is based in part on internal company reports, maps, published government reports, company letters and memoranda, and public information, as listed in Chapter 27 (References). Sections from reports authored by others may have been directly quoted or summarized in the Report and are so indicated where appropriate.

This updated MRE has been completed using available information contained in, but not limited to, the following reports, documents and discussions:

- Technical discussions with the Company's management and representatives;
- The QPs' personal inspections of the Project site, including drill cores and facilities;
- The drill hole database provided by the Company's representatives;
- A review of exploration data collected by the Company;
- Agreements, technical data and internal technical documents supplied by the Company;
- Internal unpublished reports from the Company;
- Additional information from public domain sources (SEDAR+, etc.).

The QPs believe that the basic assumptions contained in the information above are factual and accurate and that the interpretations are reasonable. The QPs have relied on this data and have no reason to believe that any material facts have been withheld or doubt the reliability of the information used to evaluate the mineral resources presented herein. The authors have sourced the information for this Report from the collection of documents listed in Chapter 27 (References).



2.5 Site Visits

The following list describes the QP visits to the Project site, including the date and general objective of the visit:

- Pierre-Luc Richard, P.Geo., of PLR visited the Project on September 19 and 20, 2021. The site visit included a visual inspection of drill cores, as well as a field tour and discussions of geological interpretations with the Company's geologists. The site visit also included a review of sampling and assaying procedures, the quality assurance / quality control (QA/QC) program, downhole survey methodologies, and the descriptions (logging) of lithologies, alteration and structures. Selected drill collars were also validated in the field using a handheld GPS.
- Jordan Zampini, P.Eng., of DRA visited the Project on September 21 and 22, 2021. The site visit included a field tour focusing on the bulk sample locations, potential process plant locations, potential tailings impoundment locations, the core shack, and a general tour.

As of the effective date of this Report, the following QPs did not visit the Property as it was not required for the purpose of this mandate:

- Jeffrey Cassoff, P.Eng., (BBA);
- Tommee Larochelle, P.Eng., MBA, PhD, (L3);

2.6 Currency, Units of Measure, and Calculations

Unless otherwise specified or noted, the units used in this Report are metric. Every effort has been made to clearly display the appropriate units being used throughout this Report.

- Currency is in Canadian dollars ("CAD" or "\$"), unless otherwise stated;
- A Canadian dollar (CAD) to United States dollar (USD) exchange rate of CAD1.30 for USD1.00 was used;
- This Report may include technical information that required subsequent calculations to derive subtotals, totals and weighted averages. Such calculations inherently involve a degree of rounding and consequently introduce a margin of error. Where these occur, the QPs consider them immaterial.



3. Reliance on Other Experts

In this Report, qualified persons relied on external inputs for specific information.

For the purpose of this Report, specifically Section 4.2 (Tenure Rights), the QP has relied on registered title information available on the *Ministère des Ressources naturelles et des Forêts* (MRNF) website known as GESTIM (Québec Ministère des Ressources naturelles et des Forêts, 2024). This information was last accessed on June 10, 2024. While mineral title documents were reviewed for this Report, this Report does not constitute, nor is it intended to represent a legal, or any other opinion as to mineral titles.

The Company supplied information on mining titles, options agreements, royalty agreements, environmental liabilities and permits. The QP is not qualified to express any legal opinion concerning the property titles, current ownership or possible litigations. A description of such agreements and the property and ownership thereof is provided for general information only. In this regard, the QP has relied on information supplied by the Company.

The information, conclusions, and recommendations contained in this Report are consistent with the data and information available at the time of preparation, and the assumptions, conditions, and qualifications set forth in this Report.

QPs have no reason to believe that the information used in the preparation of this Report is false or purposefully misleading and have relied on the accuracy and integrity of the data referenced in Chapter 27 (References) of this technical report.

As of the date of this Report, the QPs are not aware of any material fact or material change with respect to the subject matter of this Report, in its entirety, that is not presented herein, or which the omission to disclose could make this Report misleading.



4. Property Description and Location

The Eldor Property (referred to as the "Property") is situated approximately 130 km south of the Inuit community of Kuujuaq, QC, directly adjacent to the western shore of Lac Le Moyne, with approximate coordinates of longitude 68°24'0" west and latitude 56°56'0" north at its centre, covering portions of NTS map sheets 24C16 and 24F01 (Figure 4-1 and Figure 4-2). The Property is located on Category III land within the Nunavik Territory, as defined under the James Bay and Northern Quebec Agreement (JBNQA) (Figure 4-3).

The Property was acquired to cover the postulated extent of the Eldor Carbonatite Complex. Rare earth elements (REEs) are the main commodity of interest. However, the Property contains significant potential for niobium, tantalum, phosphate, and fluorspar.

The Property's size consists of one contiguous block totalling 244 claims (11,474.70 ha). Commerce is the sole registered title holder with 100% interest in the claim block.

Of the 244 claims, eight form the original Property claim acquisition and are subject to third-party royalty interests with partial buyback provisions.

4.1 Location

The Property's location and claim position is presented in Figure 4-1, Figure 4-2 and Figure 4-3, with a Property claim listing presented in Table 4-1.



Figure 4-1: Location map



Table 4-1: Property claims

Title No.	Title Type	Area (ha)	Status	Registry Date	Expiry Date	Title Holder
2145698	CDC	46.96	Active	2008-03-28	2025-05-13	Commerce Resources Corp. 100%
2145699	CDC	46.96	Active	2008-03-28	2025-05-13	Commerce Resources Corp. 100%
2123103	CDC	46.96	Active	2007-09-21	2025-05-13	Commerce Resources Corp. 100%
2123104	CDC	46.96	Active	2007-09-21	2025-05-13	Commerce Resources Corp. 100%
2118788	CDC	46.96	Active	2007-08-22	2025-05-13	Commerce Resources Corp. 100%
2118789	CDC	46.96	Active	2007-08-22	2025-05-13	Commerce Resources Corp. 100%
2118790	CDC	46.96	Active	2007-08-22	2025-05-13	Commerce Resources Corp. 100%
2118793	CDC	46.96	Active	2007-08-22	2025-05-13	Commerce Resources Corp. 100%
2145700	CDC	46.96	Active	2008-03-28	2025-05-13	Commerce Resources Corp. 100%
2145705	CDC	46.95	Active	2008-03-28	2025-05-13	Commerce Resources Corp. 100%
2145706	CDC	46.95	Active	2008-03-28	2025-05-13	Commerce Resources Corp. 100%
2123105	CDC	46.95	Active	2007-09-21	2025-05-13	Commerce Resources Corp. 100%
2123106	CDC	46.95	Active	2007-09-21	2025-05-13	Commerce Resources Corp. 100%
2118791	CDC	46.95	Active	2007-08-22	2025-05-13	Commerce Resources Corp. 100%
2118792	CDC	46.95	Active	2007-08-22	2025-05-13	Commerce Resources Corp. 100%
2118794	CDC	46.95	Active	2007-08-22	2025-05-13	Commerce Resources Corp. 100%
2145707	CDC	46.95	Active	2008-03-28	2025-05-13	Commerce Resources Corp. 100%
2145712	CDC	46.93	Active	2008-03-28	2025-05-13	Commerce Resources Corp. 100%
2145713	CDC	46.93	Active	2008-03-28	2025-05-13	Commerce Resources Corp. 100%
2145714	CDC	46.93	Active	2008-03-28	2025-05-13	Commerce Resources Corp. 100%
2145715	CDC	46.93	Active	2008-03-28	2025-05-13	Commerce Resources Corp. 100%
2145716	CDC	46.93	Active	2008-03-28	2025-05-13	Commerce Resources Corp. 100%
2145722	CDC	46.92	Active	2008-03-28	2025-05-13	Commerce Resources Corp. 100%
2145723	CDC	46.92	Active	2008-03-28	2025-05-13	Commerce Resources Corp. 100%
2145724	CDC	46.92	Active	2008-03-28	2025-05-13	Commerce Resources Corp. 100%
2145725	CDC	46.92	Active	2008-03-28	2025-05-13	Commerce Resources Corp. 100%
2145671	CDC	47.09	Active	2008-03-28	2025-05-13	Commerce Resources Corp. 100%
2118755	CDC	47.11	Active	2007-08-22	2025-05-13	Commerce Resources Corp. 100%
2145636	CDC	47.11	Active	2008-03-28	2025-05-13	Commerce Resources Corp. 100%
2145638	CDC	47.11	Active	2008-03-28	2025-05-13	Commerce Resources Corp. 100%
2145639	CDC	47.11	Active	2008-03-28	2025-05-13	Commerce Resources Corp. 100%
2145640	CDC	47.11	Active	2008-03-28	2025-05-13	Commerce Resources Corp. 100%
2118761	CDC	47.1	Active	2007-08-22	2025-05-13	Commerce Resources Corp. 100%
2145649	CDC	47.1	Active	2008-03-28	2025-05-13	Commerce Resources Corp. 100%



Title No.	Title Type	Area (ha)	Status	Registry Date	Expiry Date	Title Holder
2145650	CDC	47.1	Active	2008-03-28	2025-05-13	Commerce Resources Corp. 100%
2145651	CDC	47.1	Active	2008-03-28	2025-05-13	Commerce Resources Corp. 100%
2145652	CDC	47.1	Active	2008-03-28	2025-05-13	Commerce Resources Corp. 100%
2145653	CDC	47.1	Active	2008-03-28	2025-05-13	Commerce Resources Corp. 100%
2145654	CDC	47.1	Active	2008-03-28	2025-05-13	Commerce Resources Corp. 100%
2145655	CDC	47.1	Active	2008-03-28	2025-05-13	Commerce Resources Corp. 100%
2145656	CDC	47.1	Active	2008-03-28	2025-05-13	Commerce Resources Corp. 100%
2145657	CDC	47.1	Active	2008-03-28	2025-05-13	Commerce Resources Corp. 100%
2118767	CDC	47.09	Active	2007-08-22	2025-05-13	Commerce Resources Corp. 100%
2118768	CDC	47.09	Active	2007-08-22	2025-05-13	Commerce Resources Corp. 100%
2118769	CDC	47.09	Active	2007-08-22	2025-05-13	Commerce Resources Corp. 100%
2145662	CDC	47.09	Active	2008-03-28	2025-05-13	Commerce Resources Corp. 100%
2145663	CDC	47.09	Active	2008-03-28	2025-05-13	Commerce Resources Corp. 100%
2145664	CDC	47.09	Active	2008-03-28	2025-05-13	Commerce Resources Corp. 100%
2145665	CDC	47.09	Active	2008-03-28	2025-05-13	Commerce Resources Corp. 100%
2145666	CDC	47.09	Active	2008-03-28	2025-05-13	Commerce Resources Corp. 100%
2145667	CDC	47.09	Active	2008-03-28	2025-05-13	Commerce Resources Corp. 100%
2145668	CDC	47.09	Active	2008-03-28	2025-05-13	Commerce Resources Corp. 100%
2145669	CDC	47.09	Active	2008-03-28	2025-05-13	Commerce Resources Corp. 100%
2145670	CDC	47.09	Active	2008-03-28	2025-05-13	Commerce Resources Corp. 100%
2118775	CDC	47.08	Active	2007-08-22	2025-05-13	Commerce Resources Corp. 100%
2118776	CDC	47.08	Active	2007-08-22	2025-05-13	Commerce Resources Corp. 100%
2118777	CDC	47.08	Active	2007-08-22	2025-05-13	Commerce Resources Corp. 100%
2145674	CDC	47.08	Active	2008-03-28	2025-05-13	Commerce Resources Corp. 100%
2145675	CDC	47.08	Active	2008-03-28	2025-05-13	Commerce Resources Corp. 100%
2145676	CDC	47.08	Active	2008-03-28	2025-05-13	Commerce Resources Corp. 100%
2145677	CDC	47.08	Active	2008-03-28	2025-05-13	Commerce Resources Corp. 100%
2145678	CDC	47.08	Active	2008-03-28	2025-05-13	Commerce Resources Corp. 100%
2145679	CDC	47.08	Active	2008-03-28	2025-05-13	Commerce Resources Corp. 100%
2145680	CDC	47.08	Active	2008-03-28	2025-05-13	Commerce Resources Corp. 100%
2145681	CDC	47.08	Active	2008-03-28	2025-05-13	Commerce Resources Corp. 100%
2145682	CDC	47.08	Active	2008-03-28	2025-05-13	Commerce Resources Corp. 100%
2118780	CDC	47.07	Active	2007-08-22	2025-05-13	Commerce Resources Corp. 100%
2118781	CDC	47.07	Active	2007-08-22	2025-05-13	Commerce Resources Corp. 100%
2118782	CDC	47.07	Active	2007-08-22	2025-05-13	Commerce Resources Corp. 100%



Title No.	Title Type	Area (ha)	Status	Registry Date	Expiry Date	Title Holder
2118783	CDC	47.07	Active	2007-08-22	2025-05-13	Commerce Resources Corp. 100%
2118784	CDC	47.07	Active	2007-08-22	2025-05-13	Commerce Resources Corp. 100%
2118785	CDC	47.07	Active	2007-08-22	2025-05-13	Commerce Resources Corp. 100%
2087740	CDC	47.07	Active	2007-05-30	2025-05-13	Commerce Resources Corp. 100%
2087741	CDC	47.07	Active	2007-05-30	2025-05-13	Commerce Resources Corp. 100%
2087742	CDC	47.07	Active	2007-05-30	2025-05-13	Commerce Resources Corp. 100%
2087743	CDC	47.07	Active	2007-05-30	2025-05-13	Commerce Resources Corp. 100%
2087744	CDC	47.07	Active	2007-05-30	2025-05-13	Commerce Resources Corp. 100%
2087745	CDC	47.07	Active	2007-05-30	2025-05-13	Commerce Resources Corp. 100%
2087746	CDC	47.07	Active	2007-05-30	2025-05-13	Commerce Resources Corp. 100%
2145684	CDC	47.07	Active	2008-03-28	2025-05-13	Commerce Resources Corp. 100%
2145685	CDC	47.07	Active	2008-03-28	2025-05-13	Commerce Resources Corp. 100%
2145686	CDC	47.07	Active	2008-03-28	2025-05-13	Commerce Resources Corp. 100%
2145687	CDC	47.07	Active	2008-03-28	2025-05-13	Commerce Resources Corp. 100%
2123093	CDC	47.06	Active	2007-09-21	2025-05-13	Commerce Resources Corp. 100%
2118786	CDC	47.06	Active	2007-08-22	2025-05-13	Commerce Resources Corp. 100%
2087747	CDC	47.06	Active	2007-05-30	2025-05-13	Commerce Resources Corp. 100%
2087748	CDC	47.06	Active	2007-05-30	2025-05-13	Commerce Resources Corp. 100%
2087749	CDC	47.06	Active	2007-05-30	2025-05-13	Commerce Resources Corp. 100%
2087750	CDC	47.06	Active	2007-05-30	2025-05-13	Commerce Resources Corp. 100%
2087751	CDC	47.06	Active	2007-05-30	2025-05-13	Commerce Resources Corp. 100%
2087752	CDC	47.06	Active	2007-05-30	2025-05-13	Commerce Resources Corp. 100%
2087753	CDC	47.06	Active	2007-05-30	2025-05-13	Commerce Resources Corp. 100%
2087754	CDC	47.06	Active	2007-05-30	2025-05-13	Commerce Resources Corp. 100%
2087755	CDC	47.06	Active	2007-05-30	2025-05-13	Commerce Resources Corp. 100%
2087756	CDC	47.06	Active	2007-05-30	2025-05-13	Commerce Resources Corp. 100%
2111141	CDC	47.06	Active	2007-07-25	2025-05-13	Commerce Resources Corp. 100%
2087757	CDC	47.06	Active	2007-05-30	2025-05-13	Commerce Resources Corp. 100%
2145688	CDC	47.06	Active	2008-03-28	2025-05-13	Commerce Resources Corp. 100%
2145689	CDC	47.06	Active	2008-03-28	2025-05-13	Commerce Resources Corp. 100%
2123094	CDC	47.05	Active	2007-09-21	2025-05-13	Commerce Resources Corp. 100%
2118787	CDC	47.05	Active	2007-08-22	2025-05-13	Commerce Resources Corp. 100%
2087758	CDC	47.05	Active	2007-05-30	2025-05-13	Commerce Resources Corp. 100%
2087759	CDC	47.05	Active	2007-05-30	2025-05-13	Commerce Resources Corp. 100%
2111142	CDC	47.05	Active	2007-07-25	2025-05-13	Commerce Resources Corp. 100%



Title No.	Title Type	Area (ha)	Status	Registry Date	Expiry Date	Title Holder
2087760	CDC	47.05	Active	2007-05-30	2025-05-13	Commerce Resources Corp. 100%
2087761	CDC	47.05	Active	2007-05-30	2025-05-13	Commerce Resources Corp. 100%
2087762	CDC	47.05	Active	2007-05-30	2025-05-13	Commerce Resources Corp. 100%
2087763	CDC	47.05	Active	2007-05-30	2025-05-13	Commerce Resources Corp. 100%
2087764	CDC	47.05	Active	2007-05-30	2025-05-13	Commerce Resources Corp. 100%
2087765	CDC	47.05	Active	2007-05-30	2025-05-13	Commerce Resources Corp. 100%
2087766	CDC	47.05	Active	2007-05-30	2025-05-13	Commerce Resources Corp. 100%
2087767	CDC	47.05	Active	2007-05-30	2025-05-13	Commerce Resources Corp. 100%
2111143	CDC	47.05	Active	2007-07-25	2025-05-13	Commerce Resources Corp. 100%
2087768	CDC	47.05	Active	2007-05-30	2025-05-13	Commerce Resources Corp. 100%
2087769	CDC	47.05	Active	2007-05-30	2025-05-13	Commerce Resources Corp. 100%
2142202	CDC	47.05	Active	2008-01-25	2025-05-13	Commerce Resources Corp. 100%
2145691	CDC	47.05	Active	2008-03-28	2025-05-13	Commerce Resources Corp. 100%
2145692	CDC	47.05	Active	2008-03-28	2025-05-13	Commerce Resources Corp. 100%
2123095	CDC	47.04	Active	2007-09-21	2025-05-13	Commerce Resources Corp. 100%
2087770	CDC	47.04	Active	2007-05-30	2025-05-13	Commerce Resources Corp. 100%
2087771	CDC	47.04	Active	2007-05-30	2025-05-13	Commerce Resources Corp. 100%
2087772	CDC	47.04	Active	2007-05-30	2025-05-13	Commerce Resources Corp. 100%
2087773	CDC	47.04	Active	2007-05-30	2025-05-13	Commerce Resources Corp. 100%
2087774	CDC	47.04	Active	2007-05-30	2025-05-13	Commerce Resources Corp. 100%
1007657	CDC	47.04	Active	2001-04-11	2025-05-13	Commerce Resources Corp. 100%
1007658	CDC	47.04	Active	2001-04-11	2025-05-13	Commerce Resources Corp. 100%
2087775	CDC	47.04	Active	2007-05-30	2025-05-13	Commerce Resources Corp. 100%
2087776	CDC	47.04	Active	2007-05-30	2025-05-13	Commerce Resources Corp. 100%
2087777	CDC	47.04	Active	2007-05-30	2025-05-13	Commerce Resources Corp. 100%
2087778	CDC	47.04	Active	2007-05-30	2025-05-13	Commerce Resources Corp. 100%
2087779	CDC	47.04	Active	2007-05-30	2025-05-13	Commerce Resources Corp. 100%
2087780	CDC	47.04	Active	2007-05-30	2025-05-13	Commerce Resources Corp. 100%
2111144	CDC	47.04	Active	2007-07-25	2025-05-13	Commerce Resources Corp. 100%
2111145	CDC	47.04	Active	2007-07-25	2025-05-13	Commerce Resources Corp. 100%
2142203	CDC	47.04	Active	2008-01-25	2025-05-13	Commerce Resources Corp. 100%
2123096	CDC	47.03	Active	2007-09-21	2025-05-13	Commerce Resources Corp. 100%
2123097	CDC	47.03	Active	2007-09-21	2025-05-13	Commerce Resources Corp. 100%
2087781	CDC	47.03	Active	2007-05-30	2025-05-13	Commerce Resources Corp. 100%
2087783	CDC	47.03	Active	2007-05-30	2025-05-13	Commerce Resources Corp. 100%



Title No.	Title Type	Area (ha)	Status	Registry Date	Expiry Date	Title Holder
2087784	CDC	47.03	Active	2007-05-30	2025-05-13	Commerce Resources Corp. 100%
2087785	CDC	47.03	Active	2007-05-30	2025-05-13	Commerce Resources Corp. 100%
1007659	CDC	47.03	Active	2001-04-11	2025-05-13	Commerce Resources Corp. 100%
1007660	CDC	47.03	Active	2001-04-11	2025-05-13	Commerce Resources Corp. 100%
2087787	CDC	47.03	Active	2007-05-30	2025-05-13	Commerce Resources Corp. 100%
2087788	CDC	47.03	Active	2007-05-30	2025-05-13	Commerce Resources Corp. 100%
2111146	CDC	47.03	Active	2007-07-25	2025-05-13	Commerce Resources Corp. 100%
2111147	CDC	47.03	Active	2007-07-25	2025-05-13	Commerce Resources Corp. 100%
2111148	CDC	47.03	Active	2007-07-25	2025-05-13	Commerce Resources Corp. 100%
2142204	CDC	47.03	Active	2008-01-25	2025-05-13	Commerce Resources Corp. 100%
2142205	CDC	47.03	Active	2008-01-25	2025-05-13	Commerce Resources Corp. 100%
2123098	CDC	47.02	Active	2007-09-21	2025-05-13	Commerce Resources Corp. 100%
2087789	CDC	47.02	Active	2007-05-30	2025-05-13	Commerce Resources Corp. 100%
1007883	CDC	47.02	Active	2001-04-11	2025-05-13	Commerce Resources Corp. 100%
1007661	CDC	47.02	Active	2001-04-11	2025-05-13	Commerce Resources Corp. 100%
2087790	CDC	47.02	Active	2007-05-30	2025-05-13	Commerce Resources Corp. 100%
2087791	CDC	47.02	Active	2007-05-30	2025-05-13	Commerce Resources Corp. 100%
2087792	CDC	47.02	Active	2007-05-30	2025-05-13	Commerce Resources Corp. 100%
2087793	CDC	47.02	Active	2007-05-30	2025-05-13	Commerce Resources Corp. 100%
2087794	CDC	47.02	Active	2007-05-30	2025-05-13	Commerce Resources Corp. 100%
2087795	CDC	47.02	Active	2007-05-30	2025-05-13	Commerce Resources Corp. 100%
2087796	CDC	47.02	Active	2007-05-30	2025-05-13	Commerce Resources Corp. 100%
2111150	CDC	47.02	Active	2007-07-25	2025-05-13	Commerce Resources Corp. 100%
2111151	CDC	47.02	Active	2007-07-25	2025-05-13	Commerce Resources Corp. 100%
2142206	CDC	47.02	Active	2008-01-25	2025-05-13	Commerce Resources Corp. 100%
2142207	CDC	47.02	Active	2008-01-25	2025-05-13	Commerce Resources Corp. 100%
2142208	CDC	47.02	Active	2008-01-25	2025-05-13	Commerce Resources Corp. 100%
2142209	CDC	47.02	Active	2008-01-25	2025-05-13	Commerce Resources Corp. 100%
2123099	CDC	47.01	Active	2007-09-21	2025-05-13	Commerce Resources Corp. 100%
2123100	CDC	47.01	Active	2007-09-21	2025-05-13	Commerce Resources Corp. 100%
2087797	CDC	47.01	Active	2007-05-30	2025-05-13	Commerce Resources Corp. 100%
1007889	CDC	47.01	Active	2001-04-11	2025-05-13	Commerce Resources Corp. 100%
1007890	CDC	47.01	Active	2001-04-11	2025-05-13	Commerce Resources Corp. 100%
2087798	CDC	47.01	Active	2007-05-30	2025-05-13	Commerce Resources Corp. 100%
2087799	CDC	47.01	Active	2007-05-30	2025-05-13	Commerce Resources Corp. 100%



Title No.	Title Type	Area (ha)	Status	Registry Date	Expiry Date	Title Holder
2087800	CDC	47.01	Active	2007-05-30	2025-05-13	Commerce Resources Corp. 100%
2087801	CDC	47.01	Active	2007-05-30	2025-05-13	Commerce Resources Corp. 100%
2087802	CDC	47.01	Active	2007-05-30	2025-05-13	Commerce Resources Corp. 100%
2087803	CDC	47.01	Active	2007-05-30	2025-05-13	Commerce Resources Corp. 100%
2087804	CDC	47.01	Active	2007-05-30	2025-05-13	Commerce Resources Corp. 100%
2111152	CDC	47.01	Active	2007-07-25	2025-05-13	Commerce Resources Corp. 100%
2111153	CDC	47.01	Active	2007-07-25	2025-05-13	Commerce Resources Corp. 100%
2142210	CDC	47.01	Active	2008-01-25	2025-05-13	Commerce Resources Corp. 100%
2142211	CDC	47.01	Active	2008-01-25	2025-05-13	Commerce Resources Corp. 100%
2142212	CDC	47.01	Active	2008-01-25	2025-05-13	Commerce Resources Corp. 100%
2123101	CDC	47	Active	2007-09-21	2025-05-13	Commerce Resources Corp. 100%
2123102	CDC	47	Active	2007-09-21	2025-05-13	Commerce Resources Corp. 100%
2087805	CDC	47	Active	2007-05-30	2025-05-13	Commerce Resources Corp. 100%
2087806	CDC	47	Active	2007-05-30	2025-05-13	Commerce Resources Corp. 100%
2087807	CDC	47	Active	2007-05-30	2025-05-13	Commerce Resources Corp. 100%
2087808	CDC	47	Active	2007-05-30	2025-05-13	Commerce Resources Corp. 100%
2087809	CDC	47	Active	2007-05-30	2025-05-13	Commerce Resources Corp. 100%
2087810	CDC	47	Active	2007-05-30	2025-05-13	Commerce Resources Corp. 100%
2087811	CDC	47	Active	2007-05-30	2025-05-13	Commerce Resources Corp. 100%
2087812	CDC	47	Active	2007-05-30	2025-05-13	Commerce Resources Corp. 100%
2142213	CDC	47	Active	2008-01-25	2025-05-13	Commerce Resources Corp. 100%
2142214	CDC	47	Active	2008-01-25	2025-05-13	Commerce Resources Corp. 100%
2142215	CDC	47	Active	2008-01-25	2025-05-13	Commerce Resources Corp. 100%
2142216	CDC	47	Active	2008-01-25	2025-05-13	Commerce Resources Corp. 100%
2087813	CDC	46.99	Active	2007-05-30	2025-05-13	Commerce Resources Corp. 100%
2087814	CDC	46.99	Active	2007-05-30	2025-05-13	Commerce Resources Corp. 100%
2087815	CDC	46.99	Active	2007-05-30	2025-05-13	Commerce Resources Corp. 100%
2087816	CDC	46.99	Active	2007-05-30	2025-05-13	Commerce Resources Corp. 100%
2087817	CDC	46.99	Active	2007-05-30	2025-05-13	Commerce Resources Corp. 100%
2087818	CDC	46.99	Active	2007-05-30	2025-05-13	Commerce Resources Corp. 100%
2087819	CDC	46.99	Active	2007-05-30	2025-05-13	Commerce Resources Corp. 100%
2087820	CDC	46.99	Active	2007-05-30	2025-05-13	Commerce Resources Corp. 100%
2087821	CDC	46.99	Active	2007-05-30	2025-05-13	Commerce Resources Corp. 100%
2087822	CDC	46.99	Active	2007-05-30	2025-05-13	Commerce Resources Corp. 100%
2087823	CDC	46.99	Active	2007-05-30	2025-05-13	Commerce Resources Corp. 100%



Title No.	Title Type	Area (ha)	Status	Registry Date	Expiry Date	Title Holder
2142222	CDC	46.99	Active	2008-01-25	2025-05-13	Commerce Resources Corp. 100%
2142223	CDC	46.99	Active	2008-01-25	2025-05-13	Commerce Resources Corp. 100%
2142224	CDC	46.99	Active	2008-01-25	2025-05-13	Commerce Resources Corp. 100%
2142230	CDC	46.98	Active	2008-01-25	2025-05-13	Commerce Resources Corp. 100%
2142231	CDC	46.98	Active	2008-01-25	2025-05-13	Commerce Resources Corp. 100%
2111155	CDC	46.98	Active	2007-07-25	2025-05-13	Commerce Resources Corp. 100%
2111157	CDC	46.98	Active	2007-07-25	2025-05-13	Commerce Resources Corp. 100%
2111158	CDC	46.98	Active	2007-07-25	2025-05-13	Commerce Resources Corp. 100%
2111159	CDC	46.98	Active	2007-07-25	2025-05-13	Commerce Resources Corp. 100%
2111160	CDC	46.98	Active	2007-07-25	2025-05-13	Commerce Resources Corp. 100%
2142232	CDC	46.98	Active	2008-01-25	2025-05-13	Commerce Resources Corp. 100%
2142234	CDC	46.98	Active	2008-01-25	2025-05-13	Commerce Resources Corp. 100%
2142235	CDC	46.98	Active	2008-01-25	2025-05-13	Commerce Resources Corp. 100%
2142236	CDC	46.98	Active	2008-01-25	2025-05-13	Commerce Resources Corp. 100%
2142242	CDC	46.97	Active	2008-01-25	2025-05-13	Commerce Resources Corp. 100%
2142243	CDC	46.97	Active	2008-01-25	2025-05-13	Commerce Resources Corp. 100%
2111161	CDC	46.97	Active	2007-07-25	2025-05-13	Commerce Resources Corp. 100%
2111162	CDC	46.97	Active	2007-07-25	2025-05-13	Commerce Resources Corp. 100%
2111163	CDC	46.97	Active	2007-07-25	2025-05-13	Commerce Resources Corp. 100%
2111164	CDC	46.97	Active	2007-07-25	2025-05-13	Commerce Resources Corp. 100%
2111165	CDC	46.97	Active	2007-07-25	2025-05-13	Commerce Resources Corp. 100%
2111166	CDC	46.97	Active	2007-07-25	2025-05-13	Commerce Resources Corp. 100%
2142244	CDC	46.97	Active	2008-01-25	2025-05-13	Commerce Resources Corp. 100%
2142245	CDC	46.97	Active	2008-01-25	2025-05-13	Commerce Resources Corp. 100%
2142246	CDC	46.97	Active	2008-01-25	2025-05-13	Commerce Resources Corp. 100%
2145658	CDC	47.1	Active	2008-03-28	2025-05-13	Commerce Resources Corp. 100%
2145637	CDC	47.11	Active	2008-03-28	2025-05-13	Commerce Resources Corp. 100%
2179343	CDC	47.08	Active	2009-02-12	2025-05-13	Commerce Resources Corp. 100%
2142201	CDC	47.06	Active	2008-01-25	2025-05-13	Commerce Resources Corp. 100%
2087782	CDC	47.03	Active	2007-05-30	2025-05-13	Commerce Resources Corp. 100%
2087786	CDC	47.03	Active	2007-05-30	2025-05-13	Commerce Resources Corp. 100%
2111149	CDC	47.03	Active	2007-07-25	2025-05-13	Commerce Resources Corp. 100%
2111154	CDC	47	Active	2007-07-25	2025-05-13	Commerce Resources Corp. 100%
2111156	CDC	46.98	Active	2007-07-25	2025-05-13	Commerce Resources Corp. 100%
2142233	CDC	46.98	Active	2008-01-25	2025-05-13	Commerce Resources Corp. 100%



4.2 Tenure Rights

In the province of Québec, the *Mining Act* governs the management of mineral resources and the granting of exploration rights for mineral substances during the exploration phase. It also deals with the granting of rights pertaining to the use of these substances during the mining phase. Finally, the act establishes the rights and obligations of the holders of mining rights to ensure maximum development of Québec's mineral resources.

The Québec mineral tenure system (GESTIM) allows individuals and corporations to acquire mineral rights situated on crown and private land. Once a mineral claim is registered through GESTIM's online map designation portal (i.e., online staking), the claim is in good standing for an initial 3-year period, followed by 2-year periods thereafter. Upon the end of each claim period, known as the 'Expiry Date', the claims may be renewed indefinitely subject to applicable fee payments and work expenditure requirements being completed and filed.

The Eldor Property's claim status was verified using GESTIM (<https://gestim.mines.gouv.qc.ca/>) by the QP. As of June 10, 2024, the Property consists of 244 mineral titles that cover an area of approximately 11,474.7 ha. Commerce is the 100% registered title holder with the *Ministère des Ressources naturelles et des Forêts* (MRNF) for all 244 claims that comprise the Property. A detailed list of the Eldor claims is presented in Table 4-1. The QP has not verified the legal titles to the Property or any underlying agreement(s) that may exist concerning the licenses or other agreement(s) between third parties, but is not aware of any potential restriction to the Company's legal title.

All 244 claims that comprise the Eldor Property are in good standing with term expiry dates of May 13, 2025. As of June 10, 2024, claim expiry dates, work expenditure credits on file, work expenditure requirements, and renewal fees—for each claim's respective current term—are presented in Table 4-1. The QP makes no further assertion with regard to the legal status of the Property.

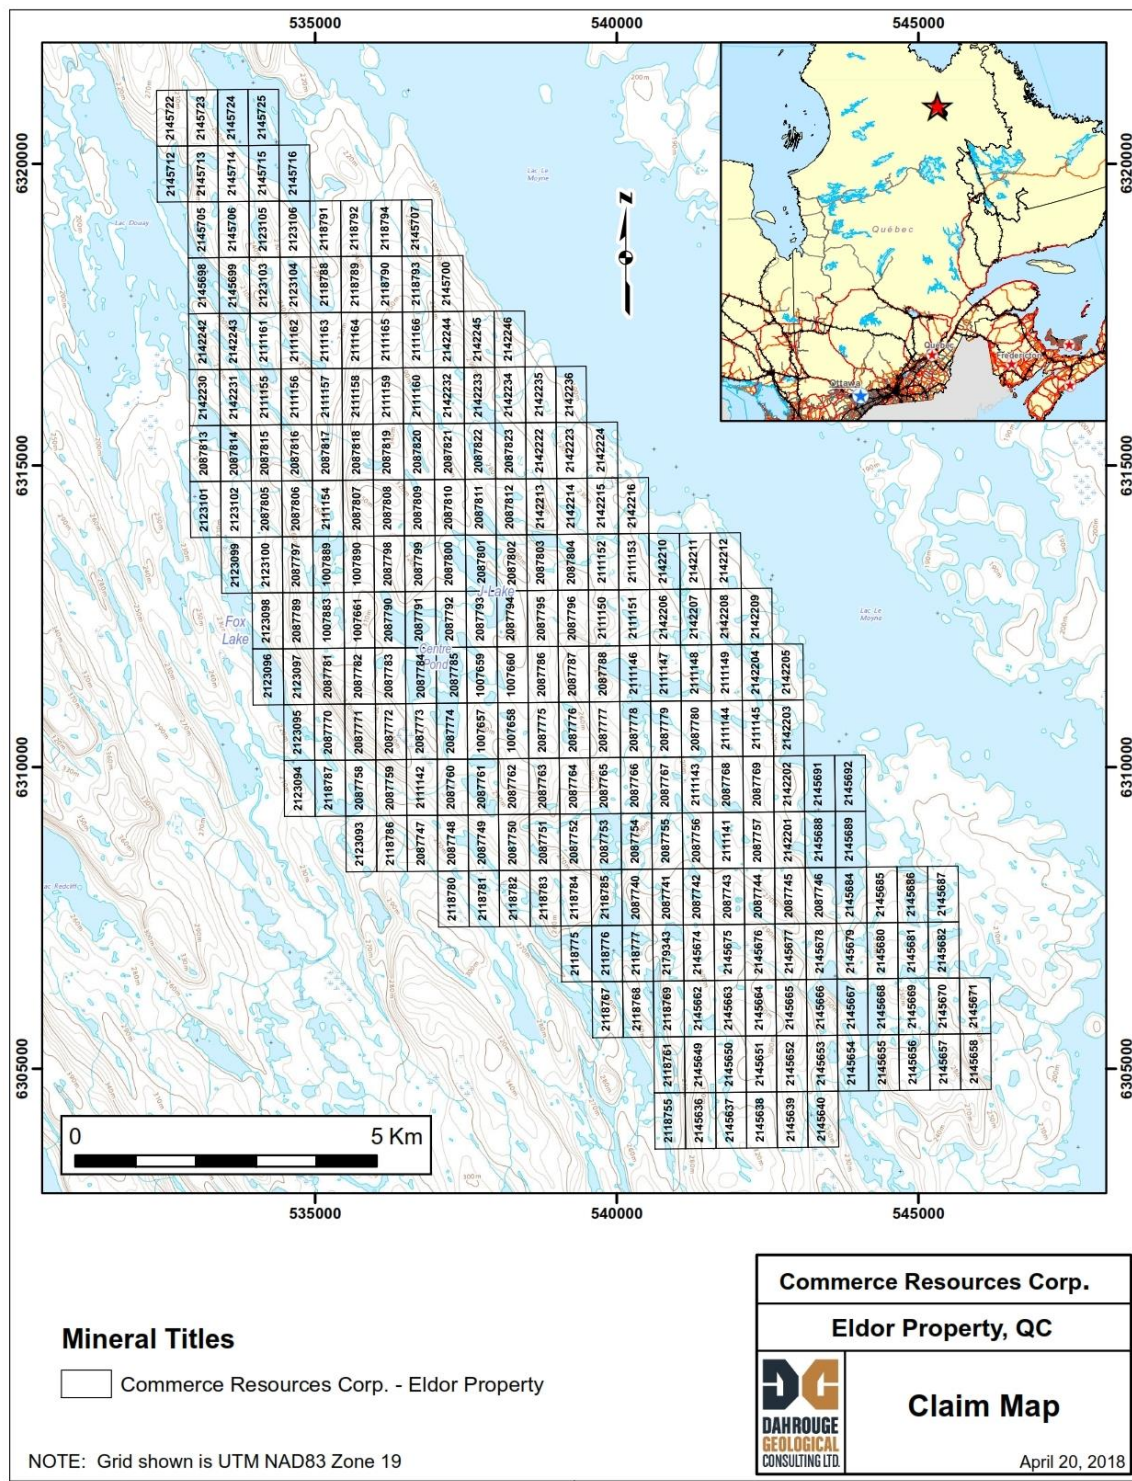


Figure 4-2: Claim map



4.3 Royalties and Related Information

The original eight claims acquired from Virginia Gold Mines Inc. (Virginia) are subject to a 1% NSR royalty in favour of Virginia and a 5% NPI royalty in favour of two individuals (Table 4-2). Commerce has the right to buy back the 5% NPI royalty in consideration of \$500,000. The Ashram Rare Earth Deposit is not situated within the Virginia claims and is not subject to any royalties.

Table 4-2: List of mineral titles subject to royalties

Mineral Title	Virginia Mines Inc.	Private
	NSR Royalty	NPI Royalty
1007883	1%	
1007889	1%	
1007661	1%	5%
1007890	1%	
1007657	1%	5%
1007658	1%	5%
1007659	1%	5%
1007660	1%	5%

4.4 Permits and Environmental Liabilities

Commerce holds a lease for its permanent exploration camp located on the Property, and is conducting exploration work with all applicable and valid permits and authorizations delivered by the provincial *Ministère des Ressources Naturelles et de la Faune* (MRNF) and the *Ministère de l'Environnement, de la Lutte contre les changements climatiques, de la Faune et des Parcs* (MELCCFP) (previously known as MDDEP).

There are no known environmental liabilities pertaining to the Property, according to the Company. If the Project does not proceed, the camp will have to be removed and the area reclaimed.

In addition to the permits and authorizations required from the provincial ministries, a formal notification is required to be submitted to the local municipalities, regional governmental agencies, stakeholders, and landowner(s) at least 30 days prior to the commencement of exploration activities. Industry best practice also demands a notification to be submitted to the local Inuit and Naskapi landholding corporations to ensure they can disseminate information within their community regarding pending activities and presented with appropriate contact information. The Company has submitted notifications to the applicable municipality and stakeholders outlining its 2024 mineral exploration plans for the Property.



Commerce Resources Corp.

NI 43-101 Technical Report

Mineral Resource Estimate for the Ashram Rare Earth Element and Fluorspar Deposit

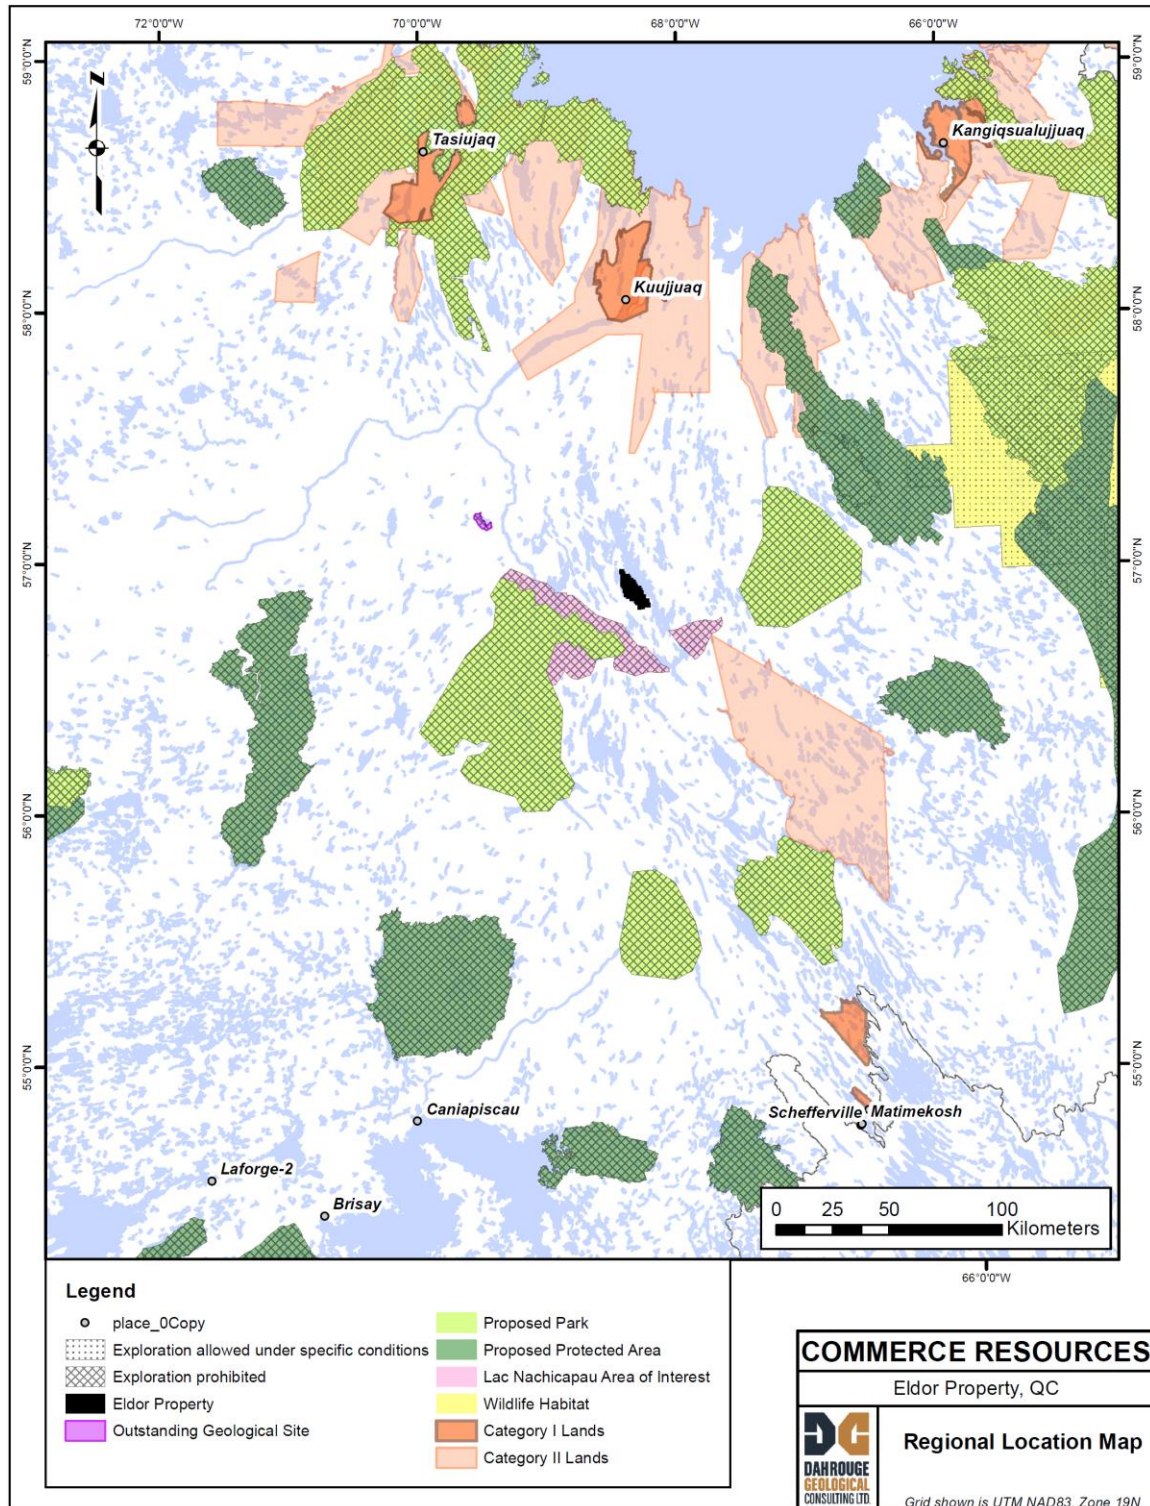


Figure 4-3: Regional location map



4.5 Other Relevant Factors

The author is not aware of any additional significant factors or risks that may affect access, title, or the right or ability to perform work on the Property. The Property does not overlap any atypically sensitive environmental areas or parks, or historical sites, to the knowledge of the Company. There are no known hindrances to operating at the Property.



5. Accessibility, Climate, Local Resources, Infrastructure and Physiography

5.1 Access and Infrastructure

Due to the large number of lakes and streams, and the Property's remoteness, helicopters and fixed-wing aircraft provide the only practical access to the Property area. The Property may be accessed in the winter months by snowmobile; however, this is impractical for exploration purposes.

The nearest communities are Kuujjuaq located 130 km to the north with a population of approximately 2,500, and Schefferville (including the nearby community of Kawawachikamach) located approximately 250 km to the southeast with a population of about 250. Both communities are serviced by a regional airport, float plane base, and periodic helicopter base. Both the Inuit and Naskapi Nation of Kawawachikamach (Naskapi) have a significant land use history in the region between two communities.

Kuujjuaq is the administrative centre for the Nunavik region of Québec and also the most practical staging area for exploration of the Property. Canadian North offers daily direct flights between Montréal and Kuujjuaq, with Air Inuit also offering flights to and from Kuujjuaq from neighbouring communities, as well as Montréal. In addition, cargo ships arrive in Kuujjuaq, via Ungava Bay, several times during the summer to offload supplies to the region. Kuujjuaq has no sea port facilities and water is shallow near the community; therefore, cargo boats (sealift) must unload onto barges at Mackay's Island (on the Koksoak River) located approximately 35 km northeast of Kuujjuaq; the barges then transport the cargo down the Koksoak River to Kuujjuaq.

Schefferville is the northern terminus of the Tshiuetin railway (formerly operated by the Quebec North Shore & Labrador), which connects to Labrador City through to Sept-Îles in the south. The rail-line is an attractive option for transporting heavier equipment; however, inclement weather and political blockages occasionally suspend its viability.

No permanent access road has been built on the Property, although a primary exploration access trail connects the main camp (Camp Valcourt) to the Ashram Deposit and is passable by all-terrain vehicle (ATV).



5.2 Climate

The climate is sub-arctic continental with average temperatures ranging from -23.3°C in January to +12.5°C in July for the nearest community of Kuujjuaq. The average annual precipitation for the last 30 years in the region is 29.5 cm of rain and 25.2 cm of snow ([Canadian Climate Normals, 1991-2020](#)). Lake freeze-up generally begins in early to middle October and ice break-up usually occurs around the end of May–early June.

5.3 Physiography

The Property is characterized by a rolling hill topography manifested by glacial drumlins and eskers. This area topography is covered in a veil of glacial till up to 10 m locally. As such, outcrop exposure is rare; however, surface and subsurface boulders are abundant. The most recent ice direction is estimated to have advanced from a generally southern direction (310°-330°).

Drainage in the area, typical of the transitional taiga to tundra regions, is northward toward Ungava Bay by way of small creeks and local poorly drained swampy areas connecting to larger lakes and major rivers.

The vegetation is generally forest-covered in the central portions of the Property, populated mainly by black spruce and tamarack trees, with generally barren areas occurring in the more elevated southern part of the Property. Willow and alder shrubs, often densely populated, also occur in low-lying areas throughout the Property.

5.4 Local Resources

The regional resources regarding labour force, supplies and equipment are challenging due to the remoteness of the Project. The nearest communities are Kuujjuaq, located 130 km north with a population of approximately 2,500 citizens, and Schefferville (including the nearby native community) situated approximately 250 km southeast with a population of about 250 citizens (2021 census). Both communities are serviced by a regional airport, float plane base, and helicopter base.

Kuujjuaq has existing marine facilities for pleasure craft and barge unloading. Seafaring cargo boats (i.e. sealift) must unload at Mackay's Island (on the Koksoak River) located approximately 35 km northeast of Kuujjuaq, due to shallow waters, and use barges for the remaining river transportation to the offloading point directly adjacent to the community. Schefferville is the northern terminus of the Tshiuetin railway (formerly operated by the Quebec North Shore & Labrador), which connects to Labrador City then Sept-Îles to the south.



Exploration work on the Property is completed from a permanent base camp (Camp Valcourt) located nearby the Ashram REE Deposit. The camp can be open year-round and currently has the capacity to accommodate up to 35 persons. The camp is fully equipped to support both surface and drill exploration. It also hosts the drill core archive of the Project. No permanent access road has been built on the Property, although a network of temporary access trails connects the camp to the Ashram Deposit and is passable by quad and side-by-side ATV.



6. History

A detailed overview of historical work on the Property is presented in the prior assessment report on the 2012, 2013 and 2014 exploration of the Property (Smith & Brown, 2016).

In brief, the carbonatite complex was discovered in 1981 by Eldor Resources Ltd. (Eldor Resources) during regional exploration work. Subsequent follow-up work by Eldor Resources, Unocal Canada Ltd., and Virginia Gold Mines Inc. (Virginia) identified significant niobium and tantalum mineralization in the areas now known as the Southeast, Northwest, and Star Trench areas (Figure 6-1). The Property was acquired by Commerce from Virginia in 2007 and Commerce has been exploring the Property since then. On January 11, 2018, Commerce announced an earn-in agreement on a block of 21 claims, later amended to 26 claims (at the time referred to as the Niobium Claim Group), with Saville Resources Inc. (Saville), whereas Saville could earn up to 75% interest subject to certain terms and conditions. The agreement focused solely on the niobium potential of the Property. On January 11, 2024, Commerce announced the termination of this earn-in agreement for the Niobium Claim Group with Saville.

The Southeast, Northwest, and Star Trench areas were drill tested in 2008 and 2010 by Commerce, with numerous significant niobium intersections returned; most notably in the Southeast Area, which returned a wide, high-grade intercept starting from 4.2 m depth in EC10-033 (0.72% Nb₂O₅ over 21.4 m), as well as 1.09% Nb₂O₅ over 5.8 m in EC10-040. However, due to a significant rare earth element discovery in 2009 that was initially drill tested in 2010 (Ashram), only limited follow-up was completed over the next decade until Saville completed a series of small drilling programs targeting the niobium at the Property.



Commerce Resources Corp.

NI 43-101 Technical Report

Mineral Resource Estimate for the Ashram Rare Earth Element
and Fluorspar Deposit

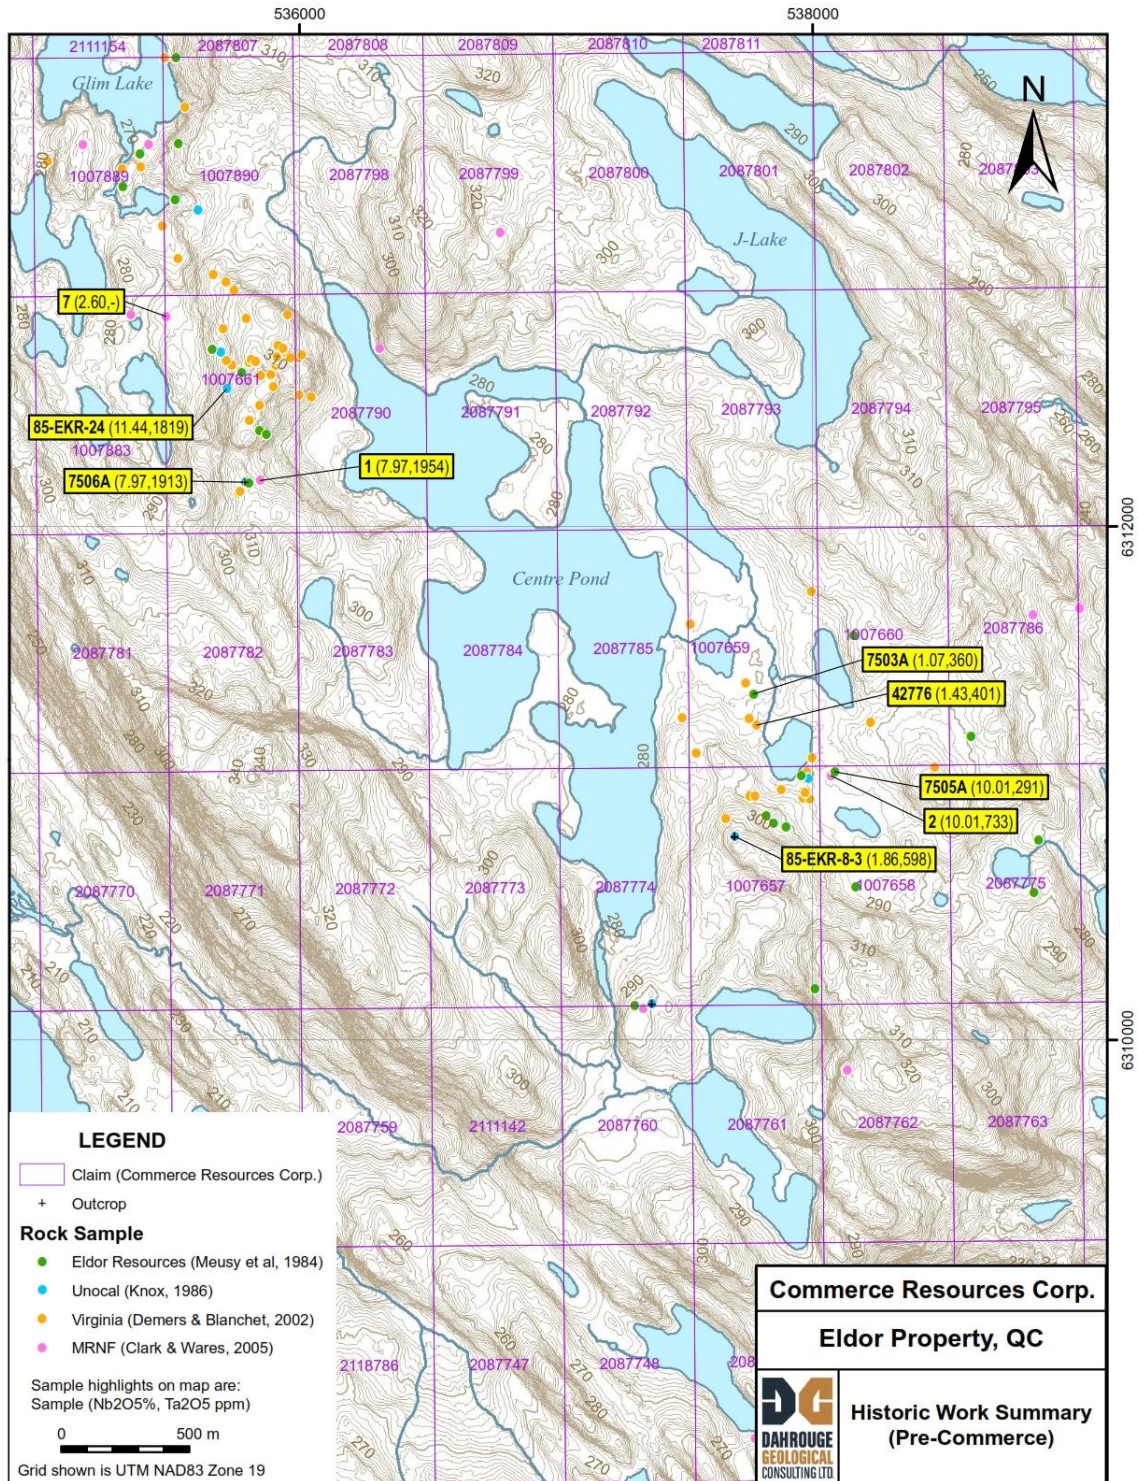


Figure 6-1: Historical work summary



6.1 Regional Government Surveys

Several regional surveys have been conducted in the area of the Property by the Geological Survey of Canada (GSC) and the MRNF. Between the 1950s and the 1970s, different authors from the GSC and the MRNF conducted regional geological surveys in the New Quebec Orogen (Labrador Trough) at varying scales, from 4 miles per inch (1:253,440) to 1 mile per inch (1:63,360). In 1979, a compilation of the various geological surveys conducted in the area was completed (Dressler and Ciesielski, 1979). Since the end of the 1970's, only a few localized and more detailed geological surveys were completed by the MRNF.

The geological syntheses reported by the MRNF for the area since the 1990's include a 1:250,000 scale map of the mineral occurrences of the New Quebec Orogen (Avramtchez et al., 1990), a preliminary lithotectonic and metallogenic synthesis at a 1:500,000 scale (Bandyayera et al., 2002), and more recently a complete lithotectonic and metallogenic synthesis of the New Quebec Orogen (Clark & Wares, 2006).

In addition to regional geological surveys, a stream sediment geochemical survey was completed in 1974 (Dressler, 1974), followed in 1987 by a regional lake sediment geochemical survey (Beaumier, 1987).

6.2 Mineral Exploration Work

The information reported in this section relates mainly to mineral exploration work conducted for the mineralization related to the carbonatite intrusive complex occurring on the Property. The Eldor Carbonatite Intrusive Complex was first discovered in 1981 by Eldor Resources following a regional lake-water and sediment sampling program completed in the northern part of the Labrador Trough for uranium exploration.

In 1982, after the acquisition of an exploration permit in the area of the Property, Eldor Resources completed a 982-line-km airborne radiometric survey that outlined several radiometric anomalies in the area.

In 1983, Eldor Resources followed up the airborne anomalies with a prospecting program. During the program, many of the anomalies were explained, using a scintillometer in hand-dug pits or trenches, or by radioactive carbonatite outcrops or boulders. The samples collected returned anomalous thorium values with some of the samples returning up to 7% Nb, 0.18% Ta, and 4% total lanthanides. A reconnaissance geological mapping survey was also conducted in the area of the newly discovered carbonatite (Meusy et al., 1984; Lafontaine, 1984).



In 1985, Unocal Canada Ltd. carried out a 5-day field program consisting of magnetic-radiometric geophysical and soil geochemical orientation surveys along with prospecting. Samples collected for geochemical analysis and petrographic study confirmed the historical results by Eldor Resources and additional Nb-Ta occurrences were outlined in the area (Knox, 1986).

The Eldor Carbonatite was staked in April 2002 by Virginia Gold Mines Ltd. (now Virginia Gold Mines Inc.) based on the historical Ta values reported by Eldor Resources. Virginia conducted a small program and re-sampled the known Nb-Ta showings, confirming the historical results. No additional work was performed in the area by Virginia (Demers and Blanchet, 2001).

In April, 2007, Commerce concluded a purchase agreement with Virginia on the eight original claims and subsequently acquired an additional 396 claims over the next 3 years, covering the carbonatite and immediate vicinity. During the summer of 2007, Commerce mandated Dahrouge Geological Consulting Ltd. (Dahrouge) to conduct an exploration program consisting of prospecting (56 observation points) and rock sampling (60 samples), soil sampling (901 samples), and ground radiometric (scintillometer) and magnetic surveys. In addition to the field program, an 862-line-km airborne magnetic-electromagnetic-radiometric survey was flown over the Property at 200 m line spacing (Smith et al., 2008).

During 2008, Dahrouge, on behalf of Commerce, conducted an exploration program on the Property consisting of prospecting and rock sampling, regional soil sampling, ground geophysics, trenching, and diamond drilling. A total of 5,482.29 m of drilling was completed over 26 holes in three areas of the Property (Star Trench, Northwest, and Southeast). From these holes, 3,471 samples totalling 4,003 m were collected and analyzed during 2008 (2,928 samples) and subsequent infill sampling programs during 2009 (97 samples) and 2010 (446 samples), not including duplicates. Some of the best results from the initial drilling and sampling are as follows:

- Star Trench Area: EC08-025 - 4.4 m grading 597 ppm Ta₂O₅, 3,058 ppm Nb₂O₅, 736 ppm U₃O₈, and 16.6% P₂O₅;
- Northwest Area: EC08-008 - 46.9 m grading 4,562 ppm Nb₂O₅;
- Southeast Area: EC08-015 - 26.1 m grading 5,466 ppm Nb₂O₅.

Fifteen (15) trenches, with 71 samples collected, were documented on the Property. The ground geophysics consisted of magnetic and scintillometer surveys. The soil sampling program significantly extended the 2007 regional grid and returned 685 samples collected at 50 m intervals along 1-km-spaced lines. The prospecting work totalled 270 observation points and returned a total of 93 rock samples.



In 2009, Dahrouge, on behalf of Commerce, completed a relatively small exploration program with field work consisting of prospecting and additional sampling of 2008 drill cores (97 samples). Additional work was completed in the office and consisted of air-photo interpretation and re-interpretation of the 2007 airborne geophysical survey. The most significant result from the 2009 exploration program was the discovery of REE mineralization in outcrop on the Ashram Peninsula, highlighting the exploration potential for rare earth elements on the Property. Of the 70 rock samples collected in the Ashram area, more than half returned TREO greater than 1%, with the best sample grading more than 3% TREO (Smith and Peter-Rennich, 2010).

After the success of the abbreviated 2009 program, and improvement in the global market conditions, Dahrouge, on behalf of Commerce, initiated an aggressive follow-up drilling, prospecting, and soil sampling program during 2010. Five trenches were completed on the Property with 30 samples collected. The soil sampling program returned 839 samples collected mostly along extensions of the regional 2007-8 grid (50 m intervals along 1-km-spaced lines). The prospecting work totalled 297 observation points and returned nearly 300 rock samples. Prospecting and soil sampling work led to the discovery of the 'Miranna' REE target near J Lake as well as the 'MC Exposure' carbonatite showing located to the east and outside of the main complex as inferred by magnetics. In addition to the ground work, detailed satellite imagery at 0.5 m resolution was acquired over the entire property.

A total of 5,389.98 m of drilling was completed over 21 holes in four different areas of the Property (Star Trench, Southeast, MC Exposure, and Ashram). Some of the best results are as follows:

- Star Trench Area: No significant intersections were returned, with the area proving to be enigmatic. Strong mineralization was encountered, but only over very narrow widths;
- Southeast Area: EC10-033 – 74.3 m grading 5,750 ppm Nb₂O₅, 140 ppm Ta₂O₅, 0.47% TREO, and 8.9% P₂O₅;
- MC Exposure: EC10-037 – 7.4 m grading 1.73% TREO;
- Ashram Area: EC10-045 – 309.2 m grading 1.99% TREO and 2.6% F.

The main highlight of the 2010 drilling program was the confirmation of significant rare earth mineralization extending from surface to considerable depth on the Ashram Peninsula. A total of 3,312.7 m over 12 drill holes completed during the summer and fall of 2010 formed the basis for an initial NI 43-101 compliant Mineral Resource Estimate released in March 2011 by SGS-Geostat of Montréal (Blainville). The estimate yielded a total Inferred resource of 117.4 Mt grading 1.74% TREO at a cut-off grade of 1.25% (Laferrière, 2011).



In 2012, SGS Geostat updated the resource that determined a base case Inferred mineral resource of 219.8 Mt containing 1.88% TREO, an Indicated mineral resource of 27.7 Mt containing 1.90% TREO, and a Measured mineral resource of 1.6 Mt containing 1.77% TREO. The update used a total of 43 drill holes comprising 15,604 m of NQ and BTW size drill core to develop the Mineral Resource Estimate (Gagnon et al., 2012).



7. Geological Setting and Mineralization

7.1 Regional Geology

The Eldor Property is located in the Paleoproterozoic New Quebec Orogen (also known as the 'Labrador Trough' or 'Fosse du Labrador'), which is interpreted to be the western margin of the Southeastern Churchill Province (SECP). The New Quebec Orogen is bound to the west by the Archean Superior Province, to the south by the Proterozoic Grenville Province, and extends as far as Ungava Bay to the north. To the east, the New Quebec Orogen is in contact with a composite terrain of the SECP named the Core Zone, composed of Archean and Paleoproterozoic lithologies (James et al., 2003); (Clark & Wares, 2006).

The recent interpretation defines the New Quebec Orogen as three cycles of sedimentation and volcanism, which make up the Kaniapiskau Supergroup. The cycles thicken eastwards and are separated from each other by erosional unconformities. The first two cycles are volcano-sedimentary in nature with an emplacement age, via U-Pb dating, of between 2.17 and 2.14 Ga and between 1.88 and 1.87 Ga respectively. Overlying this sequence is a syn-orogenic suite of meta-sedimentary rocks that form the third cycle. The belt is subdivided into eleven lithotectonic zones separated by major thrust faults.

In general, metamorphic grade increases from west to east across the orogeny. The foreland passes from sub-greenschist to upper greenschist facies and the hinterland from upper greenschist, amphibolite and/or granulite facies (Clark & Wares, 2006). The carbonatite suite of rocks has undergone greenschist facies metamorphism. The Eldor Complex and its surrounding rocks, were deformed during the Hudsonian Orogeny along with the rocks of the Kaniapiskau Supergroup (Birkett & Clark, 1991).

The regional geology is presented in Figure 7-1.

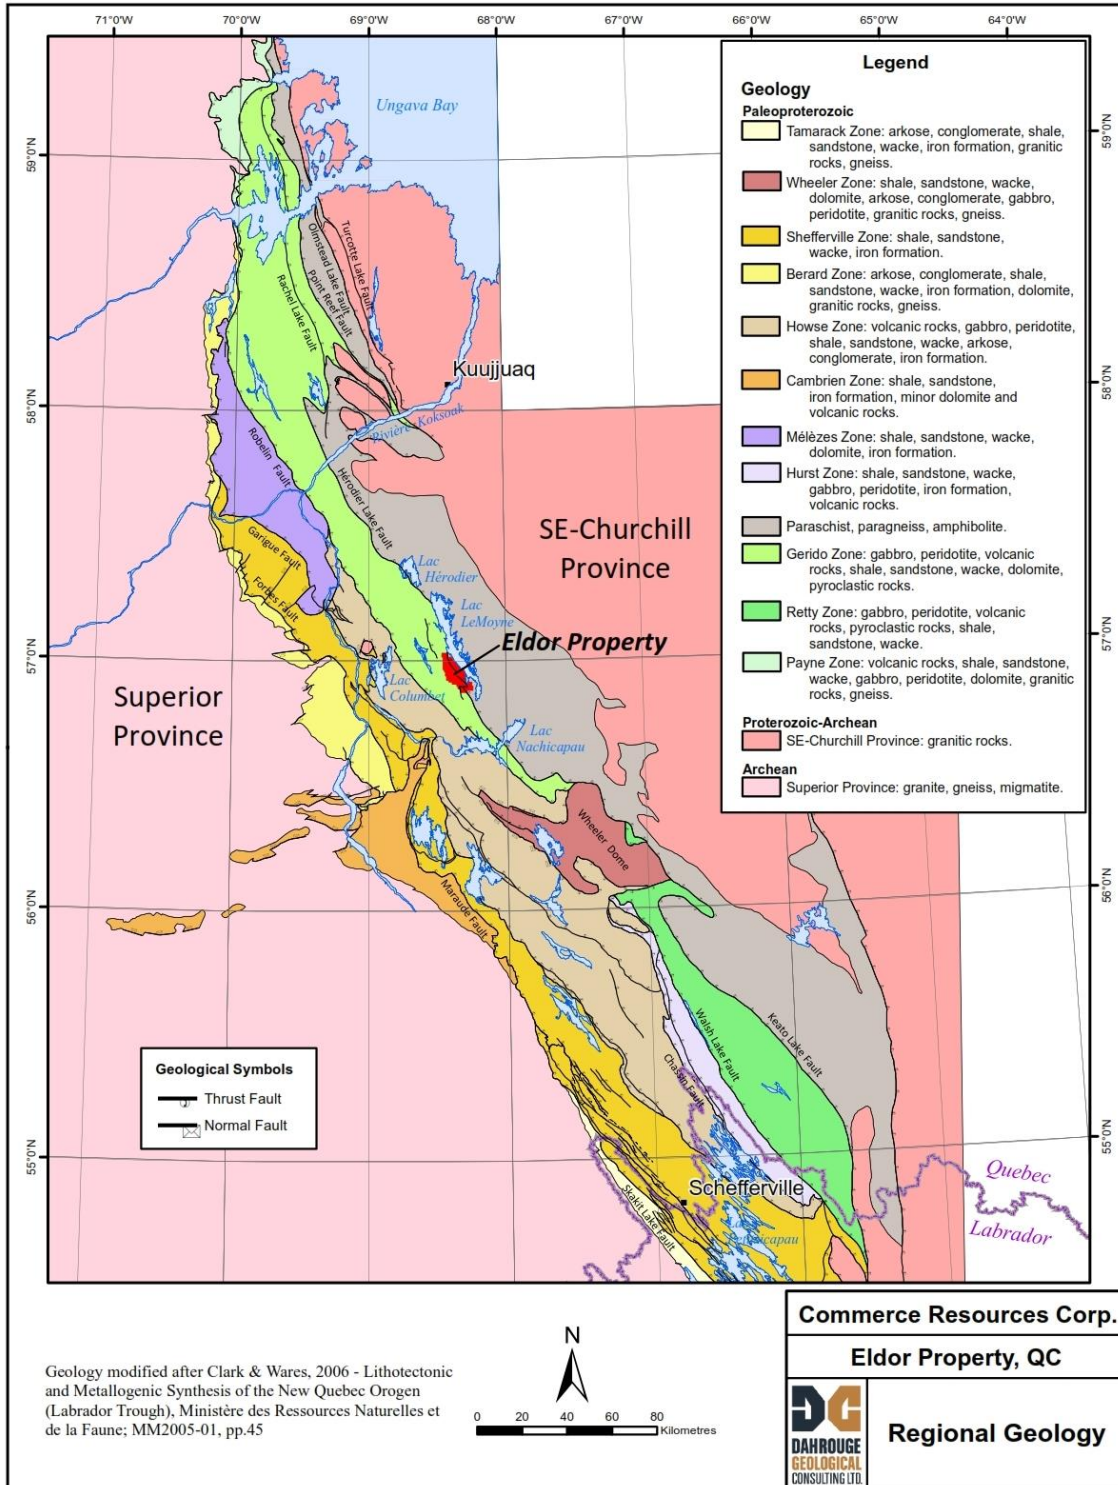


Figure 7-1: Geological setting



7.2 Project Geology

The Eldor Property covers the Eldor Carbonatite Complex with an elliptical shape interpreted to be up to 15 km long by 4 km wide (Clark & Wares, 2006) (Figure 7-2). Emplacement occurred near the end of the second cycle of the Labrador Trough's formation, approximately 1.88 to 1.87 Ga (U-Pb dating). Multiple carbonatite intrusive events are believed to have occurred during emplacement of the Eldor Complex, with calciocarbonatite, magnesiocarbonatite, and ferrocarbonatite present.

The geology of the Eldor Carbonatite is very complex, with several lithological subdivisions proposed/identified (Wright et al., 1998) and separate eruptive centres postulated (Demers & Blanchet, 2001). More recent interpretation indicates the carbonatite was emplaced as sills and dykes over multiple intrusive stages, brecciating and metasomatizing the local host rocks. Multiple stages of crosscutting phoscorite (apatite, olivine, $\pm$ magnetite) and calcite carbonatite intrusions characterize the main complex. The outer calcite carbonatite has been largely altered to dolomite through metasomatism. The phoscorite, calcite carbonatite (volumetrically dominant), and dolomite carbonatite (alteration unit) are the dominant carbonatite rock types found throughout the outer portions of the complex and Property (Schmidt, Samson, William-Jones, & Smith, HFSE evolution of the Eldor Carbonatite, 2017) (Figure 7-3).

Pyrochlore-group minerals are the dominant host of niobium and tantalum in the primary carbonatite and phoscorite, while columbite-(Fe) and niobaeschnynite-(Ce) are the dominant host in the altered carbonatite and phoscorite. Magnetite, apatite, and biotite are the most common accessory minerals associated with the pyrochlore-group minerals, while apatite, fluorite, and pyrite are the most common accessory minerals associated with columbite-(Fe) and niobaeschnynite-(Ce).

An REE-mineral bearing dolomite carbonatite was emplaced in the centre of the complex as a final stage of development and characterizes the Ashram Deposit. The intrusion is interpreted to be an ~500-m-wide pipe-like body of REE-rich Fe-rich dolomite – ankerite - siderite carbonatite with accessory fine-grained apatite, fluorite, and monazite. Their body extends throughout the complex as common narrow dykes.

The carbonatite exhibits minimal weathering, mainly due to glacial scouring of the bedrock surface and the sub-arctic climate. Only a thin veil of overburden covers the complex, with fresh rock being encountered essentially at the soil-rock interface.

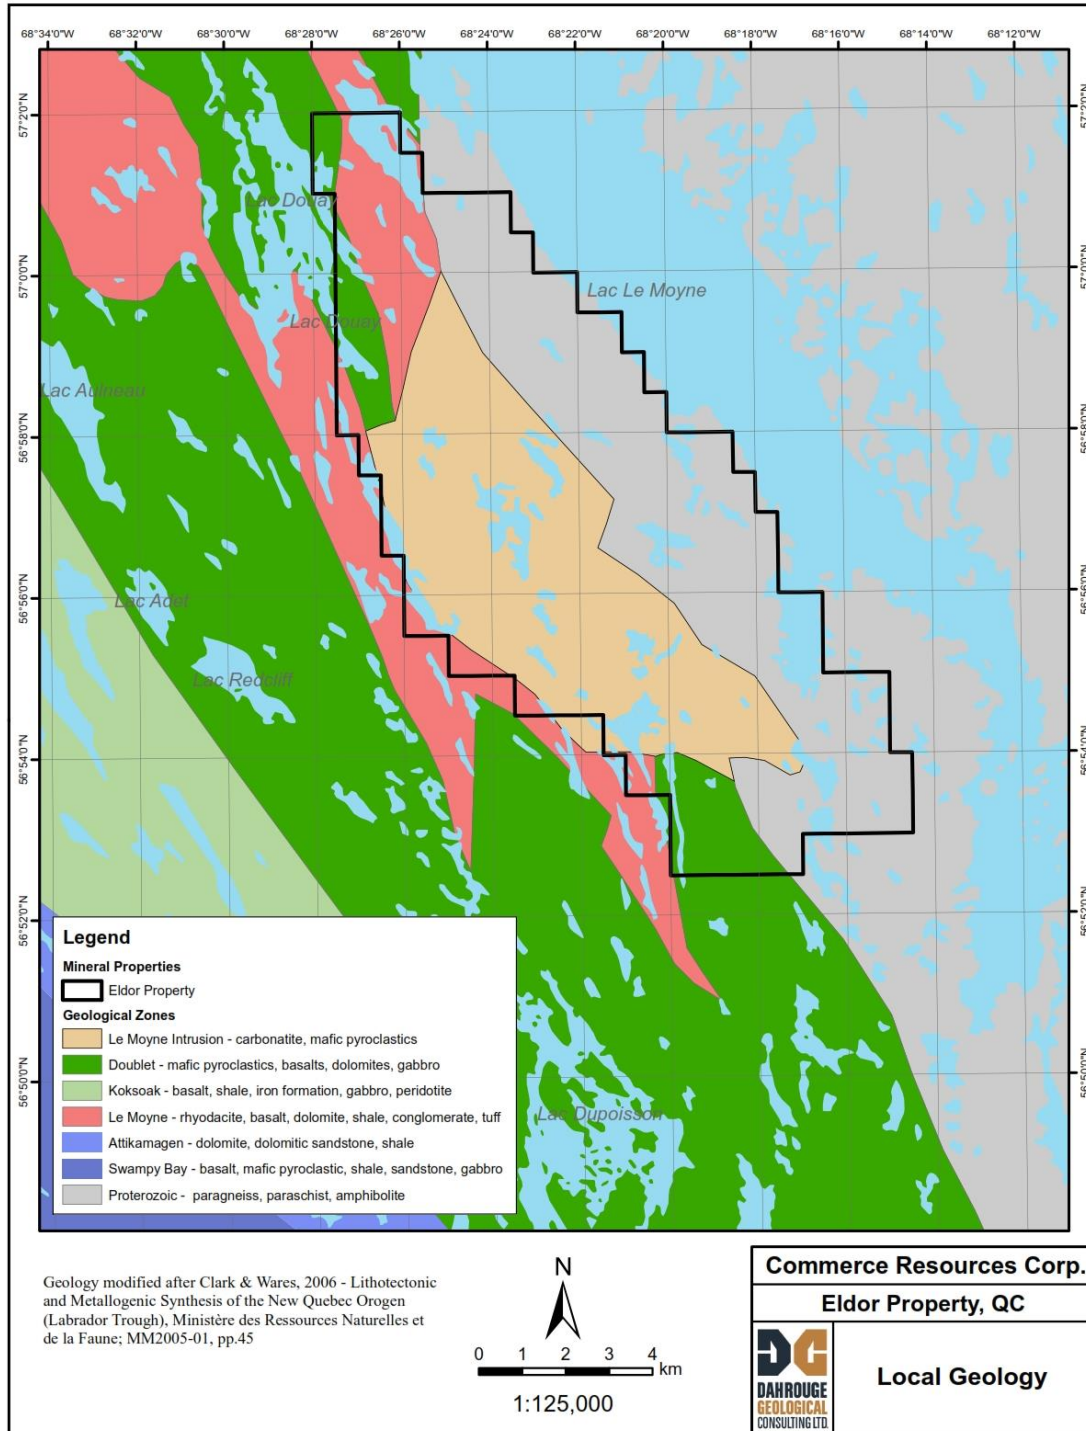


Figure 7-2: Property geology

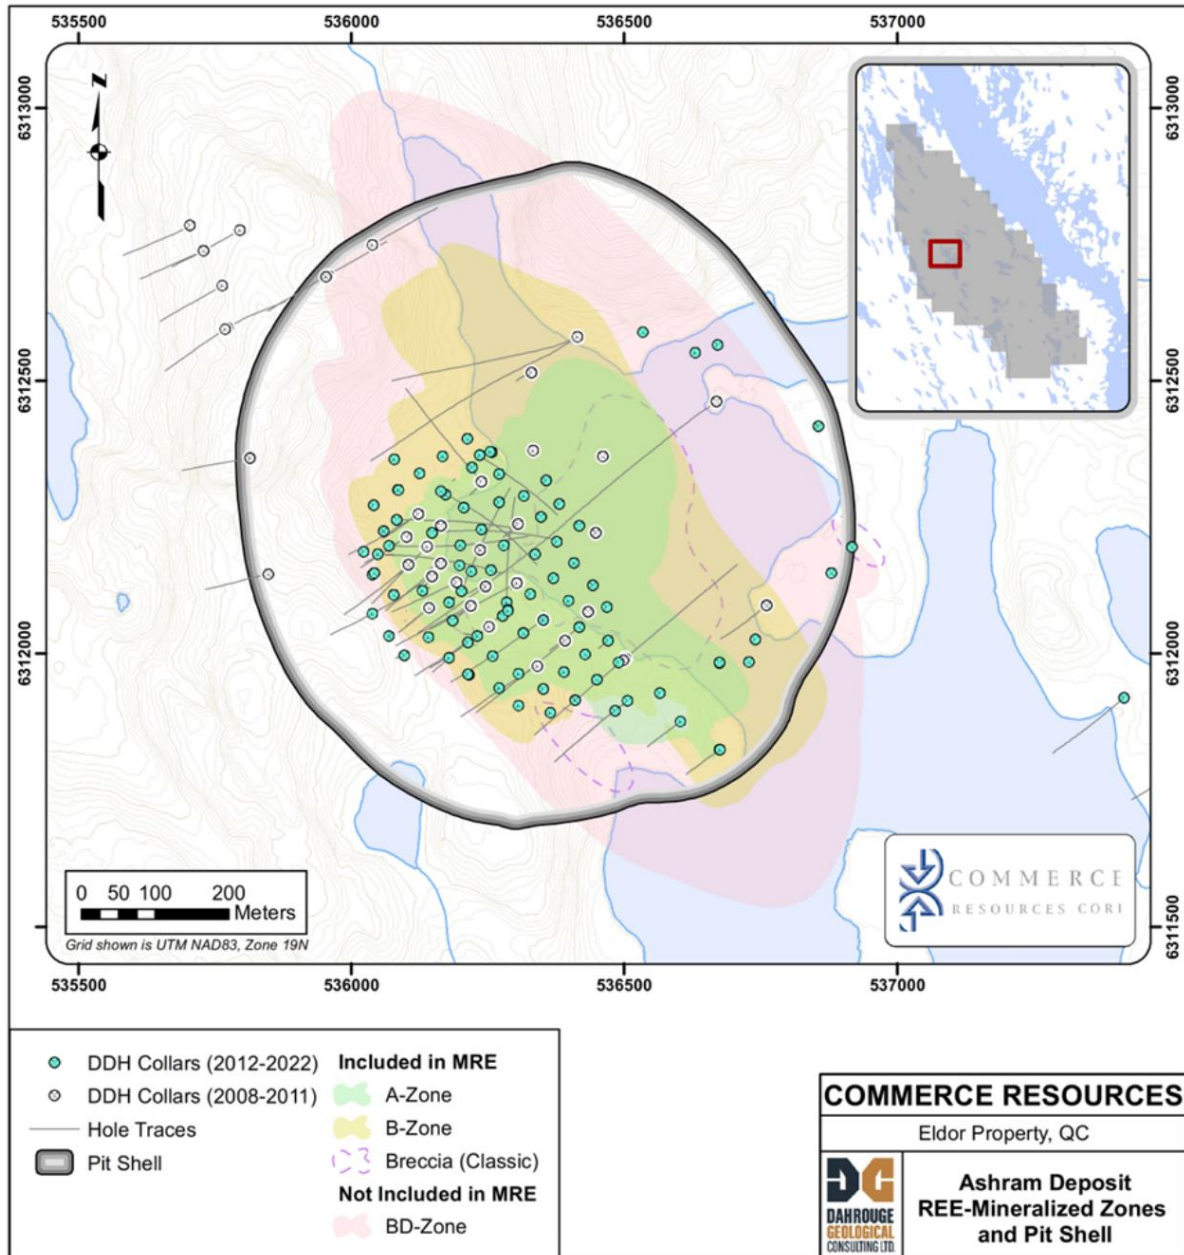


Figure 7-3: Carbonatite complex geology

7.3 Structural Geology

In the carbonatite, no consistent structures could be observed. Many different generations of melt, dykes, and veins seem to crosscut internally; however, they rarely seem to be oriented parallel or at a certain angle. Also, in drill core, no consistent picture could be observed.



7.4 Mineralization

This section summarizes rare earth mineralization and lithology specific to the Ashram Rare Earth Element Deposit. The primary sources of information include core logs and internal mineralogical reports by Patrik Schmidt, M.Sc. equivalent from the University of Tübingen (Schmidt, 2013), and Dr. Roger H. Mitchell (Mitchell, 2011), in addition to several thin section characterizations completed by Mitchell, subsequent to the internal reports. Assessment reports, personal communications and an internal report on the Ashram Deposit geology by Alex W. Knox, P.Geol., are also used (Knox, 2011).

The REE mineralization at Ashram is hosted primarily (essentially 100%) by monazite, with minor rare earth fluorocarbonates (bastnäsite, parisite, and lesser synchysite) and lesser xenotime. Rare earth mineralization at Ashram is consistent throughout the Deposit with minimal dilution from unmineralized fragments and clasts.

Monazite typically occurs as intergrowths with fluorite or disseminations in dolomite and less commonly as intergrowths with apatite or in association with quartz-rutile assemblages. Bastnäsite typically occurs as fibrous cavity fillings in dolomite, anhedral grains in veins associated with Y-Nb-Ti minerals, or anhedral grains and aggregates in fluorite.

The principal heavy rare earth mineral is xenotime-(Dy) present as anhedral to subhedral crystals in association with niobaeschynite, niobian rutile, ferrocolumbite, monazite, quartz, and mica. Xenotime is present in either pools of quartz, small veins (mm) in fluorite ferrocarnatites, or scattered throughout the carbonatite as a trace mineral in association with disseminated monazite and/or bastnäsite.

At least two generations of monazite are present: one associated with fluorite and/or disseminated in dolomite, and a second associated with the xenotime mineral assemblage. The xenotime mineral assemblage represents a distinct (later) mineralization event from that formed the first generation of monazite.

Grain size of the monazite is typically <10 µm to 25 µm, with bastnäsite slightly coarser at <20 µm to 50 µm. Aggregates of monazite ± bastnäsite in the several-hundred-micron range are present, but not common. Xenotime crystals are relatively coarser grained than monazite, although still commonly less than 50 µm. Parasite-bastnäsite intergrowths, where present (BD-Zone), occur as relatively large crystals and masses ranging typically from 200 µm to 400 µm with some aggregates exceeding a millimetre. Although fine-grained, the rare earth mineralogy of the Ashram Deposit is considered simple because it contains three of the four rare earth minerals that dominate commercially production globally (monazite, bastnäsite, and xenotime). In addition, it has been demonstrated that all three rare earth bearing minerals (monazite, bastnaesite, and xenotime) liberate together and share conventional processing techniques.



The Ashram Deposit can be roughly divided into four main mineralized zones termed 'A-Zone', 'B-Zone', 'Breccia (Classic)' and 'BD-Zone'. In general, A-Zone is central to the Deposit and is rimmed by B-Zone and BD-Zone respectively. This relationship is more prevalent along the western margin of the Deposit, where the BD-Zone is in contact with an unmineralized fenite, which interfingers with and transitions to a none-REE mineralized carbonatite unit. Along the eastern margin of the Deposit, the B and BD zones relationship is more variable, with unmineralized carbonatite predominantly marking the contact, with the fenite unit noticeably being absent. The Breccia (Classic) crosscuts 'A-Zone', 'B-Zone', and 'BD-Zone' at depth and can be traced as thinning dyke to near surface at the western margin.

A-Zone

The A-Zone lithology is the largest unit by volume and surface footprint, and also the most highly mineralized of the Ashram Deposit (typically 1.5-3+% TREO). The unit is typically very fine-grained, light to dark olive-grey, and composed of clasts of breunnerite (magnesian siderite) plus fluorite, or fluorite plus monazite, set in a complex matrix of several generations of ferro-dolomite. Fluorite is typically abundant and pervasive in the zone, occurring as disseminations, blebs, patches, veins, and fracture fillings. Accessory and trace minerals include apatite, pyrite, sphalerite, magnetite, xenotime, quartz, and niobium phases (niobium rutile, niobaeschynite, ferrocolumbite, and niobium ilmenite).

The A-Zone is texturally complex yet mineralogically simple with monazite and lesser bastnäsite as the dominant rare earth minerals. Monazite is present as disseminations in the ferro-dolomite or as fluorite-monzite intergrowths present as clasts and schlieren in a matrix of ferro-dolomite. These rocks are heterogeneous on the local scale, with a highly variable fabric consisting of deformed, 'sheared', colloform, and brecciated to pseudo-brecciated textures. Several phases of late-stage ferrocarbonatite veins (several centimetres wide) are common, along with occasional later stage, unmineralized fracture-filled fluorite veining (several millimetres wide). Geochemically, the A-Zone may be classified as magnesiocarbonatite to ferrocarbonatite.

The A-Zone is commonly in contact with the B-Zone with interfingering characteristics not uncommon. Both units share many similarities and at times appear to grade in and out of each other. An 'A/B Transition' zone has been broadly recognized in several drill holes and is defined as material that does not clearly fit into either A or B, yet shares many similarities to both units. The A-Zone is also host to a near surface zone of neodymium-praseodymium-terbium-dysprosium enrichment. This enrichment extends from surface and includes a marked decrease in cerium content.



Breccia (Classic)

The Breccia (Classic) rock type is a matrix supported breccia with polymict clasts of other carbonatites and fenites. Clasts are angular to rounded and reach up to several centimetres within an aphanitic to very-fine grained REE-enriched (~1% REO) groundmass. To date, it has only been observed to occur within the Ashram Deposit. Due to clasts of calcite and dolomite carbonatite containing pyrochlore, this unit is geochemically distinguishable compared to the other REE-dolomite carbonatite rock types. Contacts to other units are usually irregular or anastomosing.

B-Zone

The B-Zone unit typically comprises cataclastic ferro-dolomites with coarser grain size and fewer fluorite-monazite clasts than the A-Zone. Visually, the B-Zone has a cream to grey colour with a pervasive, yet patchy, yellow-beige hue of mineralization comprising monazite, apatite, and carbonates. Patches of quartz-phlogopite are present with veins of niobian rutile, ferrocolumbite, and xenotime in association with quartz, phlogopite, and bafertsite also observed. Fluorite is present occasionally as locally abundant patches or blebs and may lend a bluish hue to the rock where present; sulphides are rare. Texturally, the B-Zone appears to be much less deformed and chaotic than the A-Zone with fewer variations in fabric present. The grade of rare earth mineralization in the B-Zone is somewhat variable compared to the A-Zone and typically ranges from 1-2+% TREO. Geochemically, the B-Zone may be classified as a magnesiocarbonatite.

The B-Zone commonly has a gradational to sharp contact with the BD-Zone and is generally easily recognized by decreasing yellow-beige mineralization and the onset of distinct orange-pink rare earth fluorocarbonate minerals that impart a pinkish tone to the BD-Zone unit.

BD-Zone

The BD-Zone unit is typically cream to white in colour with orange-pink to red pervasive shades from rare earth fluorocarbonate mineralization (intergrowths of parisite-bastnäsite with lesser synchysite), and is coarser grained than the A-Zone. The BD-Zone is visually and mineralogically distinct from the A and B zones. The unit typically comprises vuggy crystalline dolomite with common to abundant rare earth fluorocarbonates (parisite intergrowths with bastnäsite) and trace to minor phlogopite, quartz, calcite, and microcline; fluorite and monazite are absent to rare. The BD-Zone may be highly blocky/fractured locally, and this is more evident along the western margins of the Deposit. Texturally, the BD-Zone is similar to the B-Zone and is much less deformed than the A-Zone, with occasional banding evident. Mineralization of the BD-Zone is less than that of the A and B zones, typically ranging from 0.6 – 1+% TREO, but with a distribution more enriched in NdPr (>20%) as well as the middle and heavy rare earths. Geochemically, the BD-Zone may be classified as a magnesiocarbonatite.



The BD-Zone is occasionally in gradational contact with a phlogopite carbonatite unit that is very similar in mineralogy and easily recognized by a decrease in orange-pink red fluorocarbonates and corresponding increase in phlogopite. The unit is more typically found at depth and along the eastern edge of the Deposit.

Along the western margin of the Deposit, the BD-Zone unit frequently lies in contact with a poorly understood lithology best described as an albite amphibole phlogopite-rich unit, sometimes interfingering with dolomite/calcite carbonatite. To the east, the BD-Zone is typically contacted by relatively unmineralized carbonatites.

Contact Lithologies

The main unmineralized contact lithologies of the Ashram Deposit may be generally grouped as fenites, lamprophyres, and other carbonatites. Furthermore, the Eldor carbonatite is in contact with metasediments and metavolcanics.

The 'Fenite' rock types are wall/country rocks that have been metasomatized by a K- and Na-rich fluids derived from the intruding carbonatite. They can be identified by naked eye examination despite their heterogenic appearance. They are typically fine-grained, but may be medium-grained in some rare cases, with dark grey/brown, blue, or green colour based on the specific mineralogy (phlogopite, Na-amphibole, or pyroxene, respectively). Fenites are almost always crosscut by multiple carbonatite veinlets that have an intensive alteration halo of phlogopite around them.

Lamprophyres may be loosely defined as ultrapotassic rocks usually composed of 50% or more phlogopite of magmatic origin. They are often foliated, giving a schistose appearance, contain common calcite/dolomite veining, and occasionally contain albite or quartz porphyroblasts. The unit is typically small, ranging from several centimetres to several metres in width and crosscuts all lithologies in the Eldor carbonatite complex.

Other carbonatites are most common on the peripheral of the system, surrounding most of the Deposit. It is commonly interfingered with the fenite to the west and typically borders the BD-Zone to the east. This unit is very common elsewhere in the complex, with certain variations hosting niobium mineralization.

Metasediments such as sedimentary carbonates, slate and phyllite outcrop near Camp Valcourt and in the outer areas of the Eldor Carbonatite Complex. Sedimentary carbonate can be distinguished from carbonatite by its mineralogy, texture, and geochemistry. The sedimentary carbonates commonly have more quartz veins crosscutting perpendicular to and parallel to the bedding. Biotite schists, schistose silt stones, slate, and conglomerate (polymict, subrounded to rounded clasts) occurs east of the Eldor Carbonatite Complex.



The 'Metavolcanic' rock type consists of various metamorphosed volcanic units that are found regionally across the Property. They vary from vesicular volcanics with basaltic composition to intermediate volcanics (rhyodacite). Unaltered (finitized) metavolcanics have only rarely been encountered in drill core and never within the Ashram Deposit.



8. Deposit Types

The deposit model at the Eldor Property is a carbonatite-hosted REE-Nb-Ta deposit. Carbonatites are by definition igneous rocks, intrusive and extrusive, which contain more than 50% by volume of carbonate minerals such as calcite, dolomite, ankerite, and less often siderite and magnesite. Intrusive carbonatites occur commonly within alkalic complexes or as isolated intrusions (sills, dikes, breccias, or small plugs) that may not be genetically related to other alkaline intrusions. Carbonatites can also be volcanic related and occur as flow or pyroclastic rocks like the well-known active Oldoinyo Lengai volcano in Tanzania. Carbonatites are generally related to large-scale, intra-plate fractures, grabens, or rifts that correlate with periods of extension, typically Precambrian to recent in age.

Carbonatite-hosted deposits occur almost exclusively in intrusive carbonatite and may be subdivided into magmatic, replacement/veins, and residual subtype. The Eldor Carbonatite can be classified as a magmatic subtype, which is the same category as the St-Honore deposit in Québec, Canada (Niobec Niobium Mine, Magris Performance Materials Inc.), the Mountain Pass deposit in California, U.S.A. (REE), and the Palabora deposit in South Africa (apatite).

The pipe-like carbonatites typically occur as subcircular or elliptical shapes and can be up to 3-4 km in diameter. Magmatic mineralization within pipe-like carbonatites is commonly found in crescent-shape, steeply dipping zones. As carbonatite magma is typically volatile rich with low viscosity, it may ascend rapidly through the mantle, fracturing the crust on impact, causing a characteristic alternating ring (crescent) structure of carbonatite and wall rock to be formed. Metasomatic mineralization occurs as irregular forms, breccias, or veins. Figure 8-1 illustrates the concentric, steeply dipping features of the pipe-like shapes of the St-Honore carbonatite.

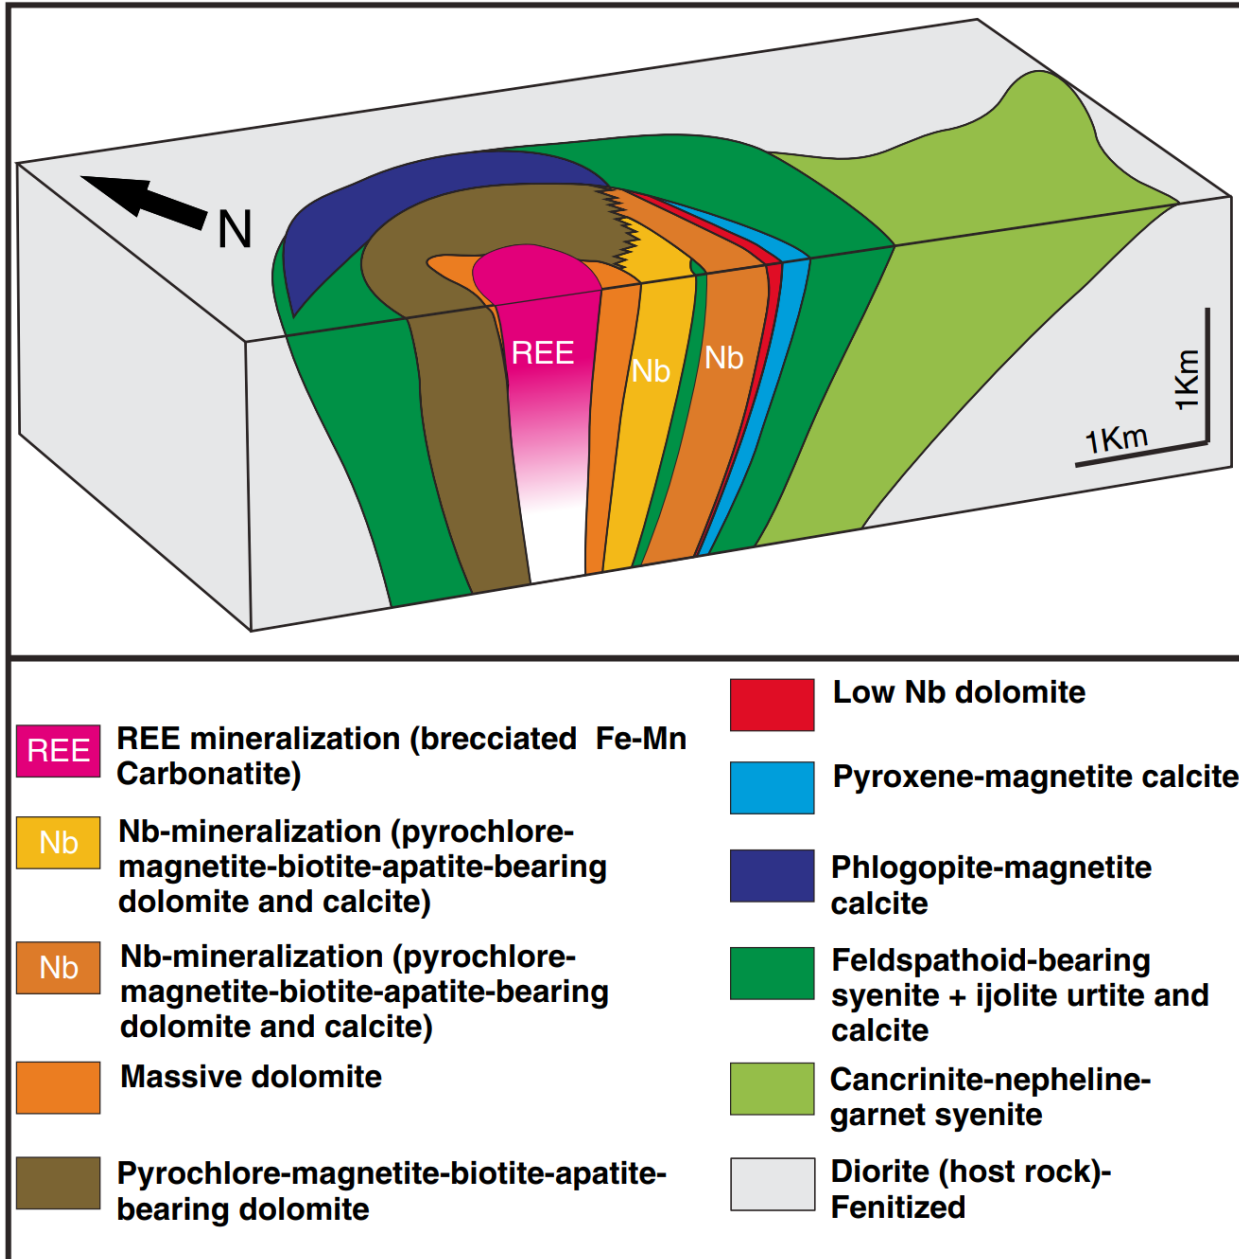


Figure 8-1: St-Honore pipe-like carbonatite deposit
(Source: Mackay and Simandl, 2014)



Carbonatites typically consist of multiple phases of intrusion with different mineralogical and textural characteristics. Early phases tend to consist mainly of calcite with later phases mainly consisting of dolomite, ankerite, or siderite. The later phases are typically more enriched in niobium or tantalum with the latest phases more enriched in rare earth minerals. In general, geochemical zonation of carbonatite phases will have calciocarbonatite intruding first, followed by magnesiocarbonatite, and finally ferrocarbonatite. Fenitization (alkali metasomatism) is common around many carbonatite intrusions.

The major mineral constituents are calcite, dolomite, siderite, ferroan calcite, ankerite as carbonates, and hematite, biotite, titanite, olivine, and quartz. Economic minerals include fluorite (F), apatite (P), pyrochlore (Nb), anatase (Ti), columbite (Nb-Ta), monazite (REE), bastnaesite (REE), parisite (REE), zircon (Zr), and magnesite (Mg), among others. Mineralization within carbonatites is typically syn- to post-intrusion. The mineralization is controlled primarily by fractional crystallization within the intrusion, with tectonic and local structures influencing the form of metasomatic mineralization (Woolley and Kempe, 1989; Richardson and Birkett, 1996; Birkett and Simandl, 1999).

In addition to the carbonatite deposit model mineralized in REE-Nb-Ta, other deposit types with known mineralized occurrences are located in the vicinity of the Property. The other deposit types include magmatic Cu-Ni (Co-PGE) sulphides in mafic and ultramafic intrusive units, and vein-type Au-Cu (Ag) mineralization hosted in fractured mafic intrusive.

Known occurrences of magmatic Cu-Ni (Co-PGE) mineralization are located approximately 5 km west of the Property. The most significant occurrences include Island, Lepage, Redcliff, and Marymac II deposits.

The known occurrences for the vein-type Au-Cu (Ag) mineralization, located between 10 km and 15 km west of the Property, include the Lac Terre Rouge showing (grab sample with 24.75 g/t Au), the Lac Daubancourt showing (grab sample with 14.3 g/t Au), and the Lac Deitrich-Sud showing (grab sample with 1.86 g/t Au) (Clark and Wares, 2006).



9. Exploration

The following section provides an overview of exploration activities completed on the Eldor Property between 2013-2022, and includes excerpts and summaries from assessment reports, technical reports, and field memos associated with those exploration programs. All prior exploration programs conducted by Commerce Resources Corp. on the Property are summarized in Chapter 6 (History).

9.1 2013 Exploration Summary

Exploration on the Eldor Property in 2013 was completed by Dahrouge, on behalf of Commerce, from February through September of 2013. Work consisted of prospecting, rock sampling, select soil sampling, diamond drilling (NQ), trail maintenance and minor additional access construction (Table 9-1).

Table 9-1: Summary of 2013 exploration and activities

Exploration Type	Units
Drilling (NQ)	12 holes (1,176.96 m)
Prospecting Rocks	15 samples
Soils (Off-grid)	2 samples
Exploration Access Trails	+0.84 km

9.1.1 Prospecting and Rock Sampling

During the summer and fall of 2013, ground exploration was conducted over select areas of the Eldor Property. This included prospecting and sampling of potentially mineralized outcrop and boulders. The prospecting program was small and focused on the PANDS Showing (immediately southeast of Glim Lake) where anomalous Ta-Nb-REE mineralization was discovered in outcrop in 2011, as well as the Miranna Area where Nb-Ta mineralized boulders were found.

A RS-121 Gamma-Ray Super Scintillometer and RS-125 Gamma Ray Spectrometer/Scintillometer were used to help locate mineralized sub-crop and boulders. Radioactivity, as assessed with a scintillometer, is an excellent method of prospecting for Nb-Ta-REE mineralization.

Collected rock samples were described, placed in pre-labelled clear plastic bags, had their CPS recorded, and were sealed with a plastic zip tie. Samples were shipped to Activation Laboratories Ltd. (Actlabs) in Ancaster, ON, by way of float plane to Kuujuaq, air cargo to Montréal, and truck to Ancaster. Rock samples were analyzed for major, base, and trace elements (Code 8-REE package by ICP and ICP-MS), Nb-Ta (Code 8 by XRF), Au (Code 1A2 by fire assay), and fluorine (Code 4F-F package by Fusion Specific Ion Electrode-ISE).



A total of 15 rock samples were collected and assayed from outcrops and boulders. Of the samples collected, eight were from boulders, six were from outcrop, and one sample could not be confidently categorized as either. All of the samples collected were carbonatite, which is the target host lithology for mineralization (Nb-Ta-REE-Phosphate-Fluorspar). Table 9-2 summarizes the results from the 2013 rock sampling campaign.

Table 9-2: Select mineralized rock samples collected in 2013

Sample ID	Exploration Area	Source	Nb ₂ O ₅ (%)	Ta ₂ O ₅ (%)	TREO (%)	P ₂ O ₅ (%)
118004	PANDS	Outcrop	0.20	0.034	0.25	12.3
118010	Miranna	Boulder	1.57	0.122	0.46	10.6
118013	Miranna	Boulder	0.96	0.079	0.45	9.9
118014	Miranna	Boulder	1.94	0.038	0.40	9.9

The majority of samples (eight) were collected from the Miranna Area where prior exploration work had identified potential for high-grade Nb-Ta mineralization. Even though only minimal prospecting was carried out in the area, the samples collected yielded highly encouraging results, with four samples exceeding 1% Nb₂O₅ (peak of 1.94%), and three samples exceeding 0.05% Ta₂O₅ (peak of 0.122%). The Nb-Ta mineralization was also accompanied by strong phosphate mineralization (exceeding 9.0% P₂O₅), as well as potentially significant REE mineralization (~0.30 to 0.45% TREO) with enrichment in the middle and heavy REEs (~10 to 14% MH-T).

Several rocks samples were collected from the PANDS Area (adjacent to the southeast of Glim Lake). Samples collected in 2011 suggested Nb, Ta, and REE mineralization potential; however, none of the samples collected in 2013 returned mineralization of significance. A peak of 0.2% Nb₂O₅ and 0.53% TREO, respectively, was returned; however, one sample did return 0.034% Ta₂O₅ and 12.3% P₂O₅.

9.1.2 2013 Soil Sampling

Although soil sampling was not part of the 2013 program scope, two off-grid soil samples were collected during prospecting. Both samples were collected from TR10-017A (Miranna Trench) and confirmed prior sampling analytical results (Figure 9-1).

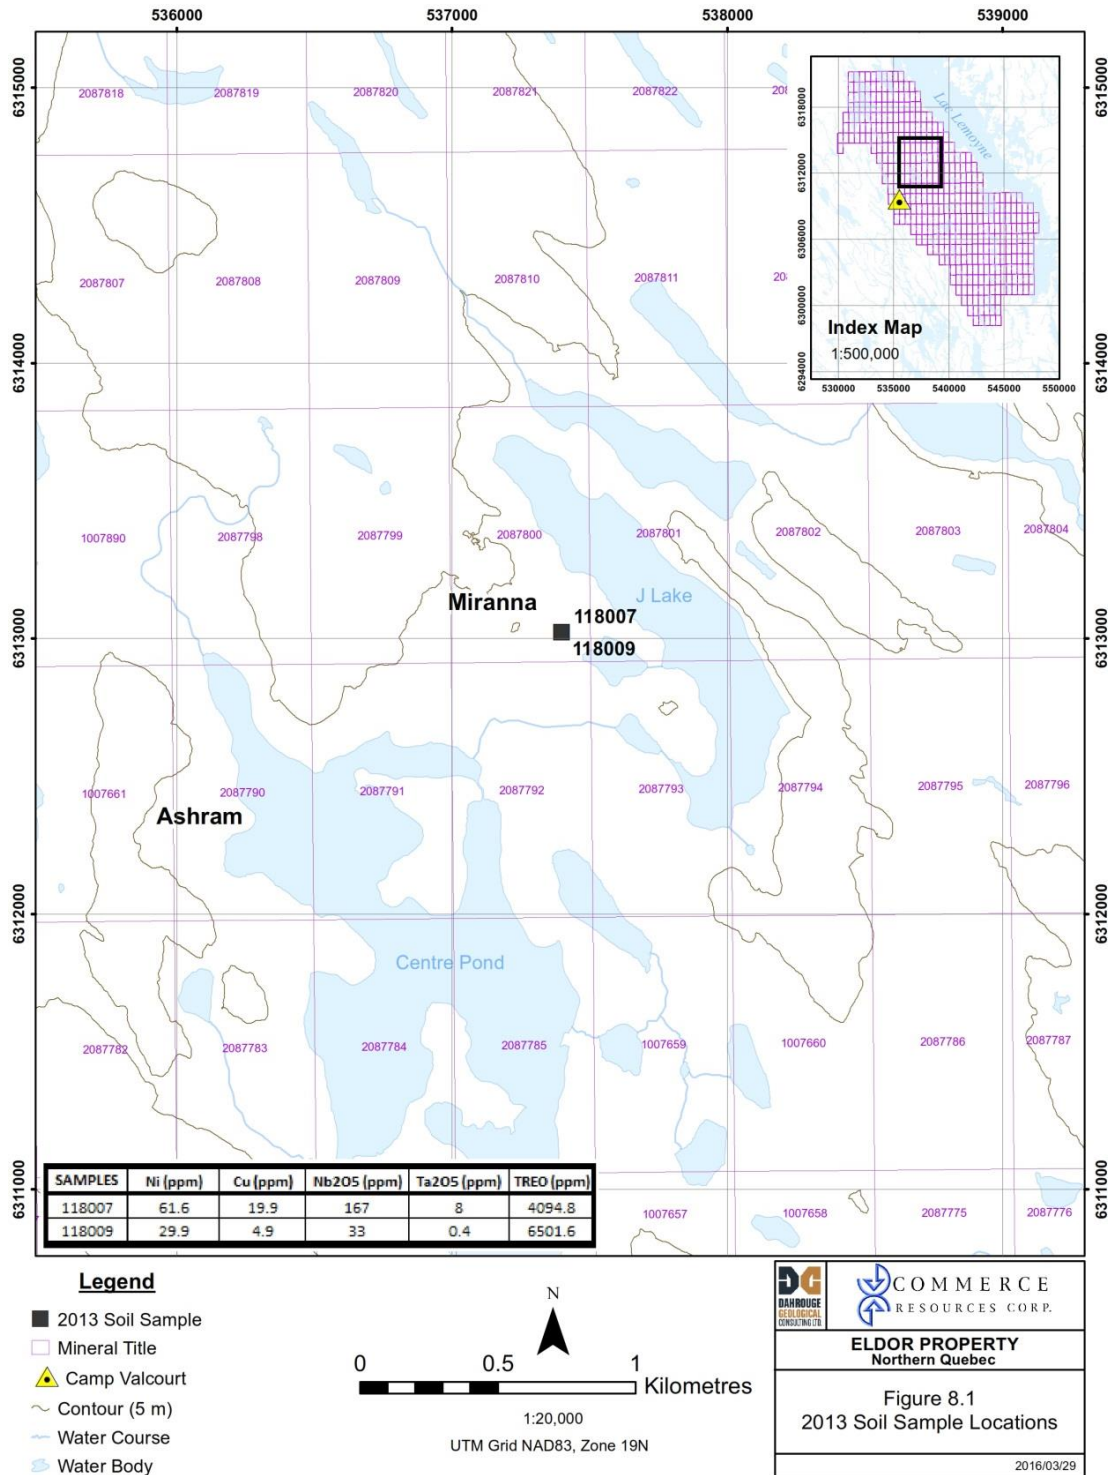


Figure 9-1: 2013 Soil sample data



9.2 2015 Exploration Summary

The 2015 exploration consisted of a two-phase diamond drilling program (48 drill holes totalling 4,878.11 m), prospecting and rock sampling in the Miranna Area, as well as OTV-ATV surveys and packer testing in support of the Ashram Project's advancement towards a Pre-feasibility Study (PFS). The field work began on January 18 and finished on August 31, 2015, for a total of 226 days.

9.2.1 Prospecting and Rock Sampling

The prospecting and rock sampling program focused primarily on the Miranna Area where a well-mineralized in niobium, tantalum, and phosphate boulder field had been discovered previously. The primary objective of prospecting was to further delineate the boulder train to better ascertain its bedrock source ahead of drill testing.

The prospecting samples were shipped by air from Kuujuaq to Montréal followed by ground transportation to Actlabs in Ancaster, ON for analysis. Analysis included major, base, and trace elements (Code 8-REE package by ICP and ICP-MS), fluorine (Code 4F-F by Ion Electrode-ISE), and niobium-tantalum by XRF (Code 8-Coltan-XRF).

A total of 78 rock samples were collected during the program, of which, 68 were identified as boulders. A total of 64 of the rock samples were collected from the Miranna Area during the program. Of this, a total of 40 returned Nb₂O₅ grades of more than 0.5%, with 16 in excess of 1% to a peak of 5.9% Nb₂O₅. In addition, significant grades of tantalum, phosphate, and TREO were also reported from the same samples. Select analytical results are presented in Table 9-3.

Table 9-3: Select mineralized boulder samples collected from the Miranna Area in 2015

Sample ID ⁽¹⁾	Nb ₂ O ₅ (%) ⁽²⁾	Ta ₂ O ₅ (ppm) ⁽²⁾	P ₂ O ₅ (%)	TREO (%) ⁽³⁾
139977	5.93	310	11.5	0.72
116702	4.24	160	11.9	0.64
118014	1.94	380	9.9	0.40
116681	1.65	60	8.0	0.37
118010	1.57	1,220	10.6	0.46
116680	1.52	70	11.8	0.50
116685	1.48	100	10.9	0.38
139980	1.06	1,040	11.1	0.53
116718	1.04	670	9.1	0.39

(1) All samples are from boulders.

(2) Ta₂O₅ and Nb₂O₅ are analyzed by XRF with a detection limit of 10 ppm.

(3) TREO is the summation of Ce₂O₃ + La₂O₃ + Pr₂O₃ + Nd₂O₃ + Eu₂O₃ + Sm₂O₃ + Gd₂O₃ + Tb₂O₃ + Dy₂O₃ + Ho₂O₃ + Er₂O₃ + Tm₂O₃ + Yb₂O₃ + Lu₂O₃ + Y₂O₃.



The prospecting in the Miranna Area further delineated the geometry of the boulder train, with the boulders often large and angular, indicating that they have not travelled far from source. Further, the common presence of magnetite in some of the well-mineralized samples suggests the source may have a magnetic signature. Taken collectively, the data indicates that a magnetic high anomaly to the immediate south, termed the “Miranna Target”, which appears to coincide with the boulder train’s apex, may be the bedrock source.

Locations for rock samples collected in 2015, 2016 and 2017 are presented in Figure 9-2, Figure 9-3, Figure 9-4 and Figure 9-5.

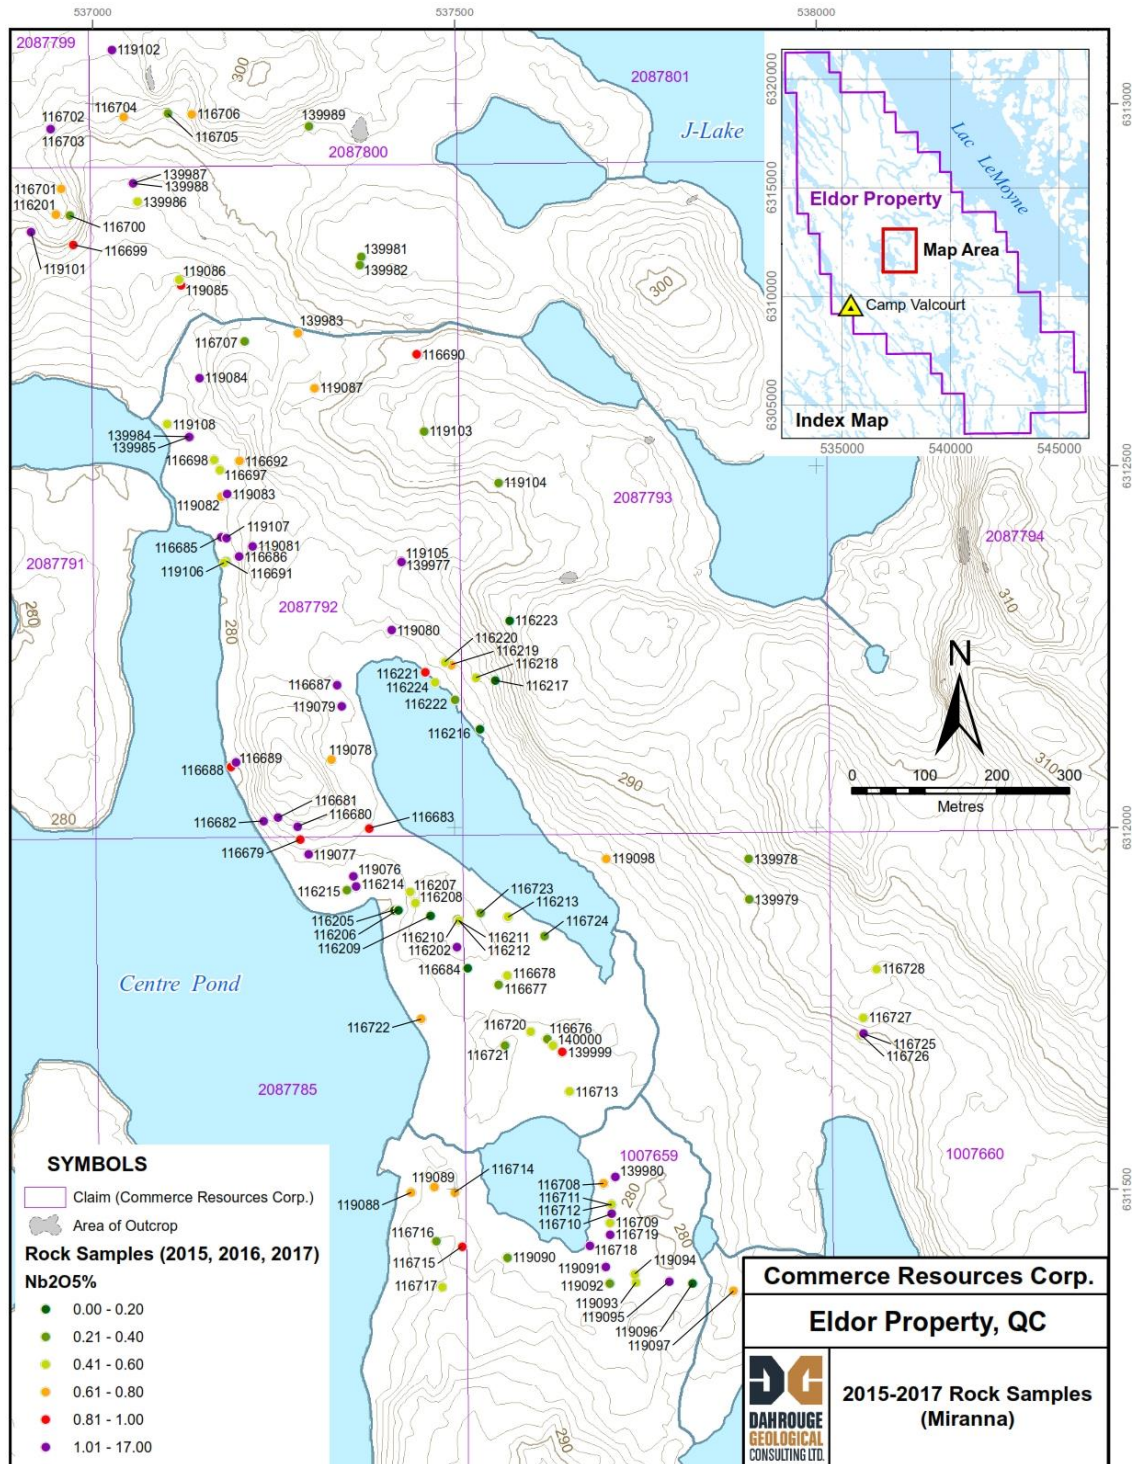


Figure 9-2: 2015-2016-2017 Rock sample locations – Miranna Area (Nb₂O₅)

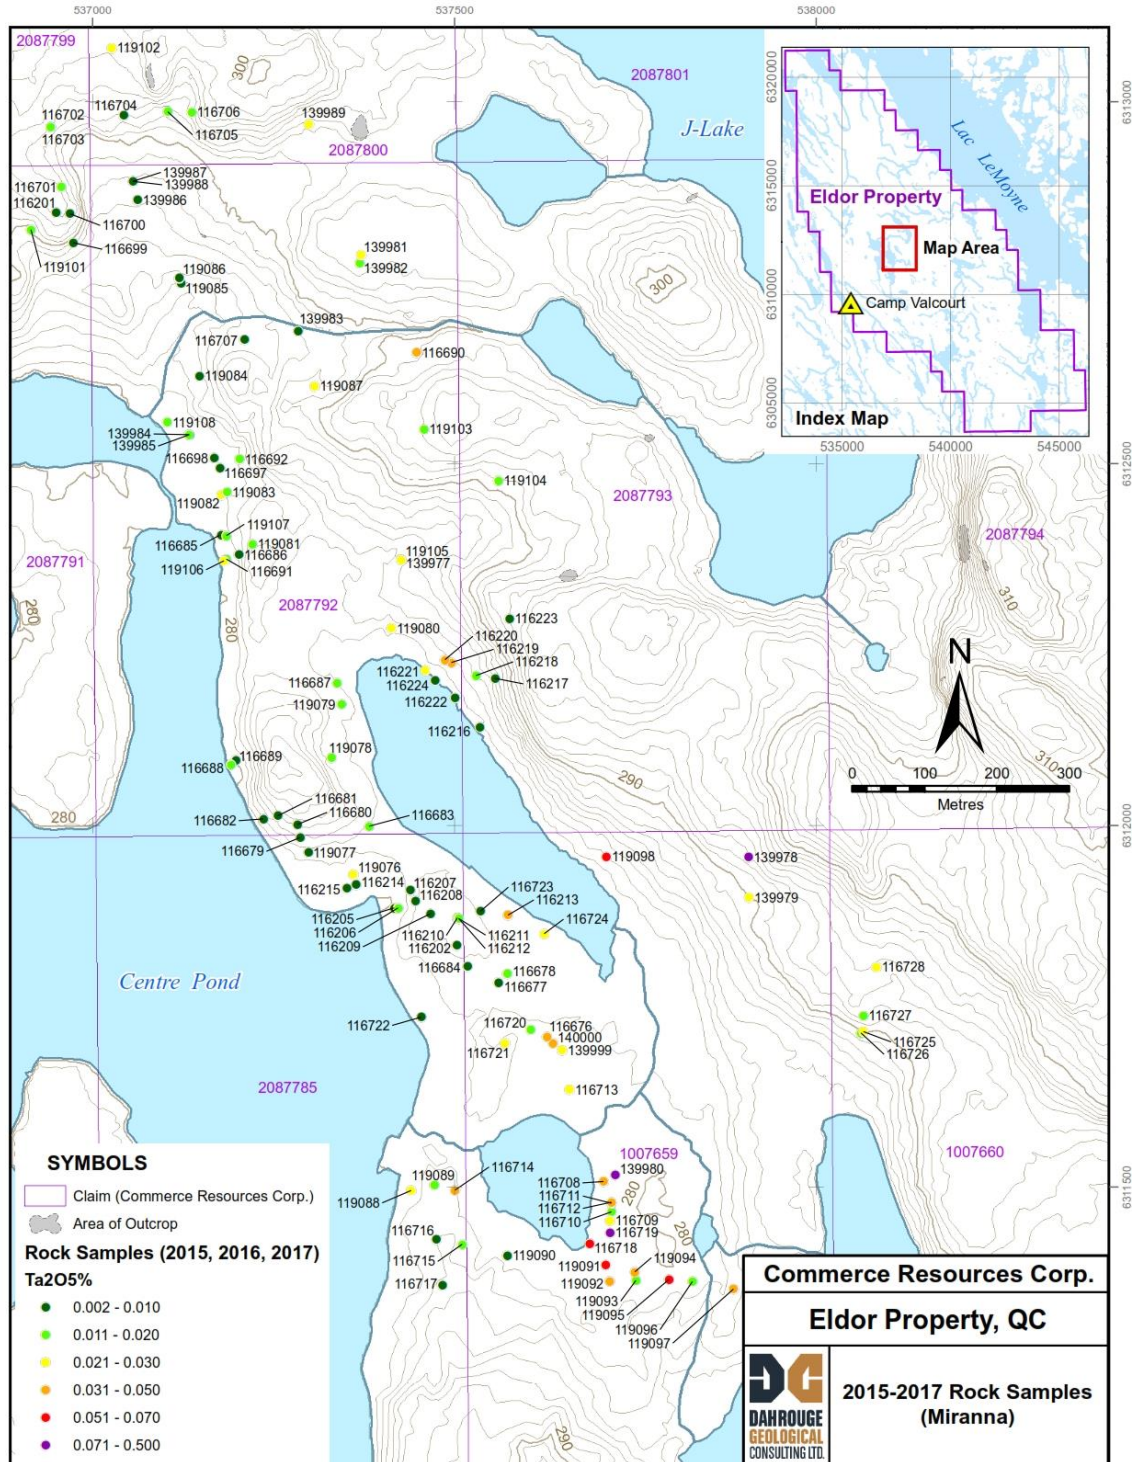


Figure 9-3: 2015-2016-2017 Rock sample locations – Miranna Area (Ta₂O₅)

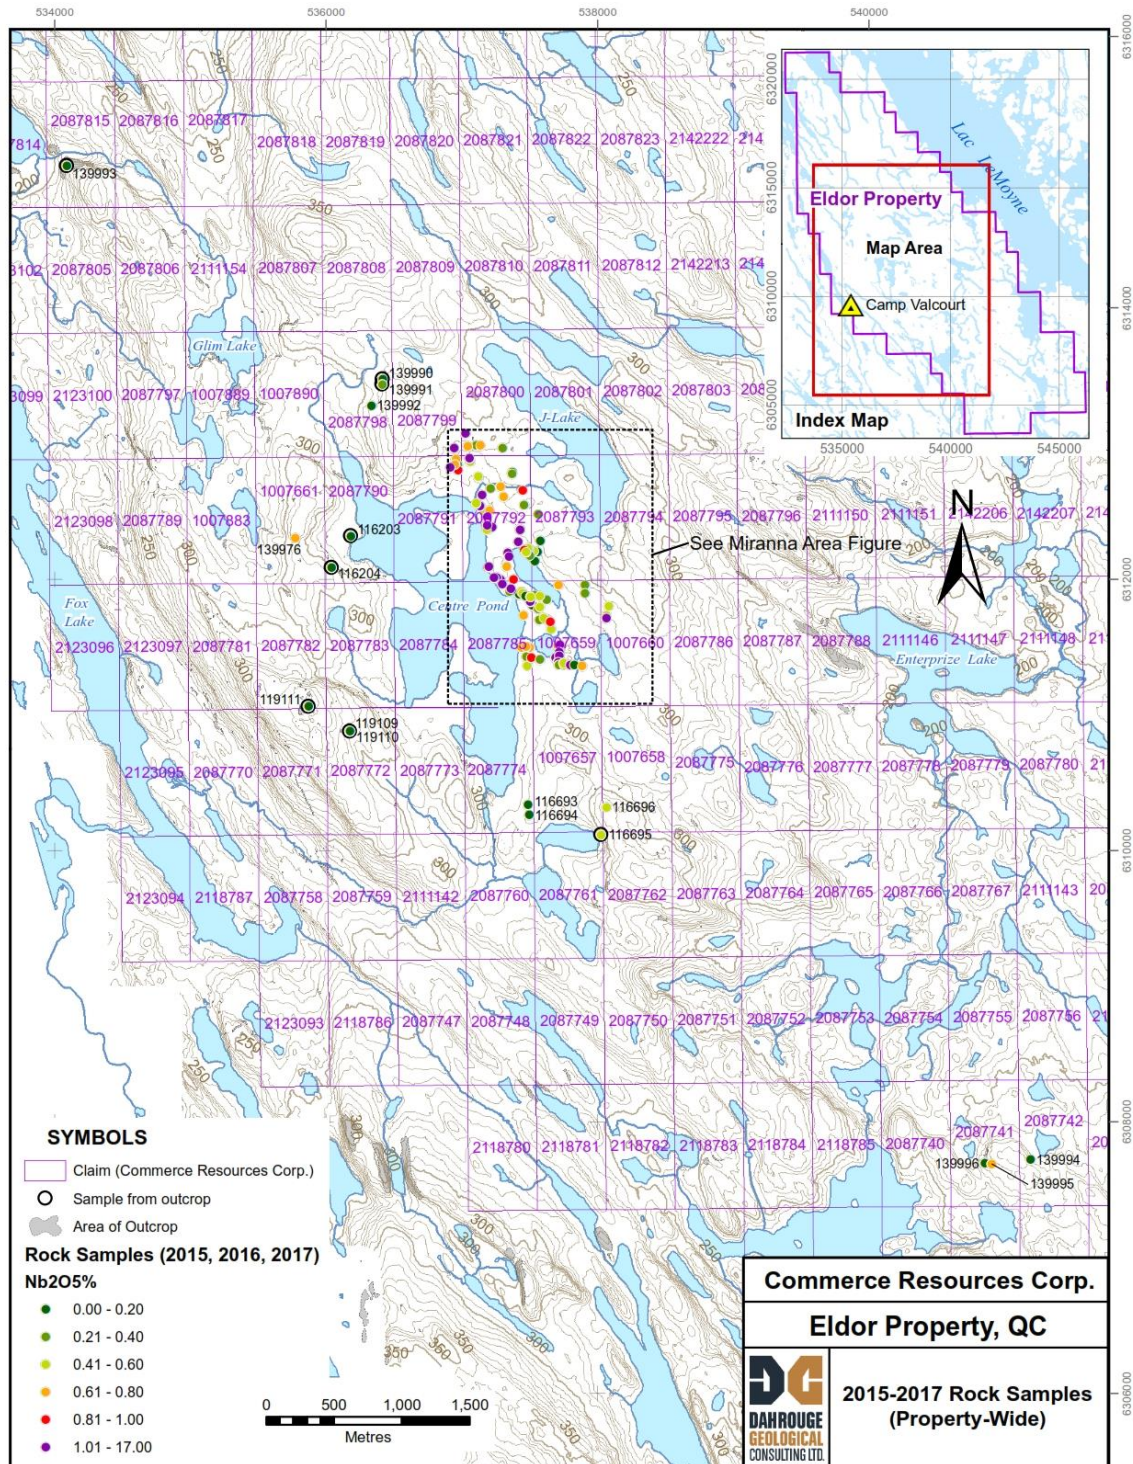


Figure 9-4: 2015-2016-2017 Rock sample locations – Regional (Nb₂O₅)

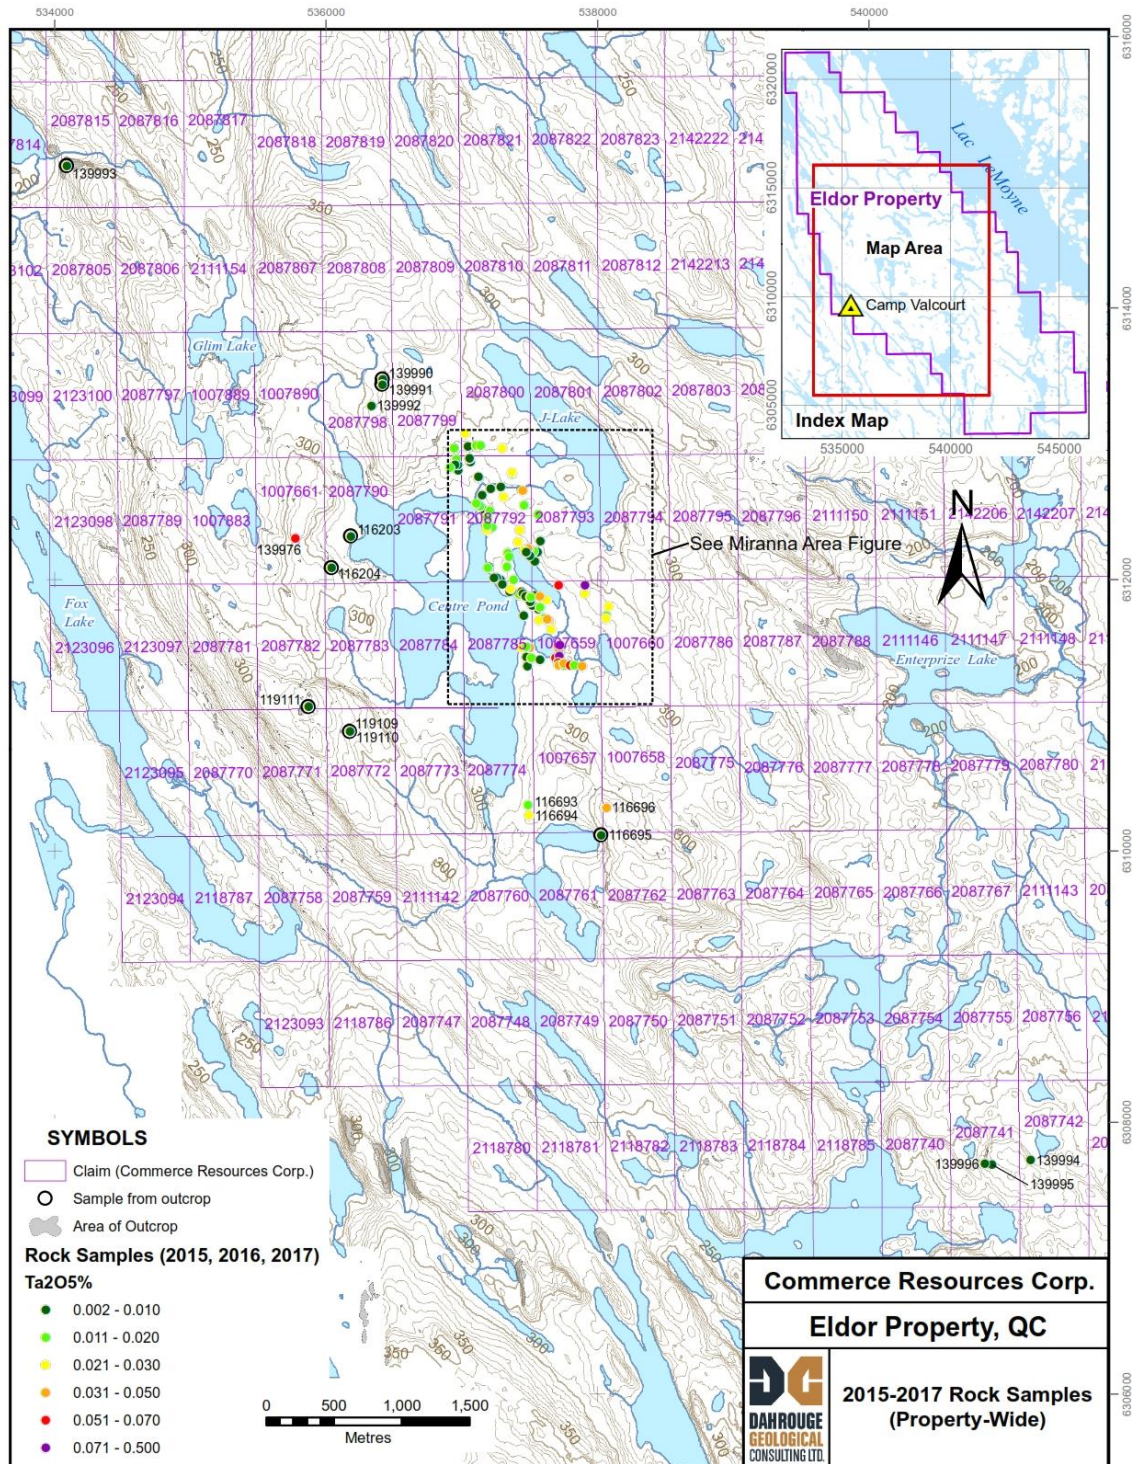


Figure 9-5: 2015-2016-2017 Rock sample locations – Regional (Ta₂O₅)



9.2.2 Other Work (2015)

In addition to the 2015 drilling and prospecting programs, various other work was completed in support of the Ashram Project's development studies and included downhole Optical and Acoustic Televiewer surveying (ATV-OTV), carried out by DGI Geoscience Inc. of Toronto, ON, as well as packer and related hydrogeological testing carried out by Hydro-Ressources Inc. of Québec City, QC.

The OTV-ATV method allows for structural delineation and orientation of the geology to be accurately determined. The survey collects information on joints fractures, faults, and geophysical properties, as well as a high-resolution (360°) digital image of the drill hole wall. The packer testing allows for sub-surface hydrostratigraphy and ground water movement to be understood.

The 2015 environmental program consisted of surface water sample collection for analysis from various lakes in the vicinity, including the proposed tailings area options, as well as groundwater samples collected from several Ashram Deposit drill holes. This data will contribute to the ongoing baseline data collection, and related studies, as required for advancement of the Project.

The ATV-OTV, hydrogeological, and environmental baseline work are noted here for completeness and are not discussed further in this section.

9.3 2016 Exploration Summary

The 2016 exploration consisted of three main components, resource definition drilling, hydrogeological test work, and continued environmental baseline data collection in support of the Ashram Project's advancement towards a pre-feasibility study. Follow-up prospecting and rock sampling of the Miranna Area was completed. The field work began on August 14 and finished on October 15, 2015, for a total of 63 days.

9.3.1 Prospecting and Rock Sampling

Several days of prospecting were completed, focused on the Miranna Area, where prior sampling has identified a boulder train well-mineralized in niobium and tantalum. A total of 24 rock samples were collected during the program (22 from Miranna Area).

The prospecting samples were shipped by air from Kuujuaq to Montréal followed by ground transportation to Actlabs in Ancaster, ON, for analysis. Analysis included major, base, and trace elements (Code 8-REE package by ICP and ICP-MS), fluorine (Code 4F-F by Ion Electrode-ISE), and niobium-tantalum by XRF (Code 8-Coltan-XRF).



The prospecting focused in the immediate area of the Miranna Target, as well as a secondary target anomaly located ~200 m north (the "Moira Target"), along the northern shore of a small lake. High-grade boulder samples were collected from each target area, with the highest grades overlying the Miranna Target, including 1.43% Nb₂O₅ and 1.08% Nb₂O₅. Tantalum up to 0.045% Ta₂O₅ was also returned.

Locations for rock samples collected in 2015, 2016 and 2017 are presented in Figure 9-2, Figure 9-3, Figure 9-4 and Figure 9-5.

9.3.2 Other Work (2016)

The hydrogeological program was comprised of two phases with drill holes completed for resource definition also used for the hydrogeological aspects of the program. The first phase included the installation of vibrating wire piezometers and monitoring wells down several previously completed drill holes and was completed in mid-September. The second phase involved a pumping test using drill hole EC16-160, completed at the northwest end of the deposit at a location determined using the packer testing data collected in 2015.

The objective of the pump test was to induce a drawdown and subsequent recovery of the water table across the entire site, with concurrent data collection by the instruments installed in the surrounding holes on the north, south, and western sides of the deposit. The pump test was carried out over a continuous seven-day period, with the recovery then monitored for a seven-day period thereafter.

The data collected will be used to generate a preliminary hydrogeological model for the deposit and immediate area, sufficient for the purposes of a pre-feasibility study. The model will assist in the evaluation of sub-surface water flow and slope stability of various pit shell configurations, as well as form the basis for ongoing in-depth interpretation of the area's hydrogeology as the Ashram Project advances.

Both the hydrogeological test work and environmental data collection are noted here for completeness and are not discussed further.

9.4 2017 Exploration Summary

The 2017 program consisted of additional processing and sampling of the 2016 drill core, which had not been completed prior to the end of the 2016 field program, as well as prospecting and rock sampling in the Miranna Area. The 2017 field program began September 10 and finished on October 2, for a total of 23 days.



9.4.1 Prospecting and Rock Sampling

In addition to the drill core sampling, several days of prospecting were completed, focused on the Miranna Area, where prior sampling had identified a train well-mineralized niobium-tantalum boulder train. A total of 34 rock samples were collected during the program (31 from Miranna Area). The prospecting samples were shipped by air from Kuujuaq to Montréal followed by ground transportation to Actlabs in Ancaster, ON for analysis. Analysis included major, base, and trace elements (Code 8-REE package by ICP and ICP-MS), fluorine (Code 4F-F by Ion Electrode-ISE), and niobium-tantalum by XRF (Code 8-Coltan-XRF).

With respect to the Miranna Area, high-grade boulder samples continued to be collected with a potential target bedrock source identified for initial drill testing. Of the 31 samples collected in the Miranna Area during 2017, a total of 13 assayed greater than 1% Nb₂O₅ with a peak assay of 4.3% Nb₂O₅. In addition, high-grade tantalum continued to be sampled, with a peak of assay returned of 0.07% Ta₂O₅ in sample 119091, also accompanied by high-grades of niobium (1.2% Nb₂O₅). Although further interpretation is required, the data indicates that several boulder trains are present in the Miranna Area, and therefore, may indicate multiple bedrock sources.

Locations for rock samples collected in 2015, 2016 and 2017 are presented in Figure 9-2, Figure 9-3, Figure 9-4 and Figure 9-5.

9.4.2 Other Work (2017)

The 2017 program also included minor instrument maintenance, data downloads from the on-site weather station, as well as lake and drill hole data logger installation in Centre Pond and throughout the Ashram Deposit via several drill holes, respectively. The data will help form an integral component in the development of the hydrogeological model for the area.

9.5 2018 Exploration Summary

The primary objective of the field program was to further refine known targets for niobium-tantalum prospectivity ahead of drilling, as well as define new areas of interest through targeted prospecting and a ground magnetic survey. The 2018 field program began on September 23 and finished on October 10, for a total of 16 days.



9.5.1 Prospecting and Rock Sampling

A total of 126 prospecting rock samples were collected over the program, dominantly of boulders, with high-grade niobium-tantalum continuing to be discovered on the Property. A total of 22 boulders returned niobium assays exceeding 0.70% Nb₂O₅, with 14 samples exceeding 0.80% Nb₂O₅, and six samples exceeding 1.00% Nb₂O₅ to a peak assay of 1.50% Nb₂O₅. In addition, strong grades of tantalum continued to be returned in association with niobium, ranging from 160 ppm to 1,080 ppm Ta₂O₅ over the 14 high-grade boulders that exceeded 0.80% Nb₂O₅. The 2018 surface program outlined a new target area of interest where only very limited exploration had previously been completed. The area is located approximately 400 m south of the drill area and is marked by two of the strongest mineralized boulders collected during the program; 1.28% Nb₂O₅ and 260 ppm Ta₂O₅, and 0.88% Nb₂O₅ and 1,080 ppm Ta₂O₅. The two boulders are separated by approximately 100 m with glacial ice direction indicating the source is further to the southeast. Prior to 2018, this area had been subjected to only a cursory examination, and therefore, the discovery of two well-mineralized boulders was highly encouraging and expanded the prospectivity of the Property.

In addition to the targeted prospecting, a ground magnetic survey was completed over the Miranna and Southeast area targets. The survey was very successful in further delineating targets and potential rock unit contacts. Specifically, the survey delineated further the Miranna Target, as well as the Moira Target, located approximately 250 m further north, where a strong and distinct anomaly was revealed. Analysis of several overlapping boulder trains in the area suggested that Moira could be one of several interpreted sources of mineralization, and therefore, it became a higher priority target following the 2018 prospecting and rock sampling program.

9.6 2022 Exploration Summary

The 2022 exploration program had two principal objectives: resource/pit infill drilling in support of the Ashram Project's development studies and improving the confidence of the geological model at the southern end of the Ashram Deposit where mineralization remains open. Additionally, channel samples were cut and sampled from select mapped mineralized outcrops located within the proposed open-pit shell.



9.6.1 Channel Sampling

In addition to the drill core sampling during the 2022 exploration campaign, channel samples were collected from known mineralized outcrops, with the primary objective of further constraining mineralized lithological boundaries at surface within the proposed expanded open-pit shell. These surface channel cuts were strategically chosen to validate mineralization at surface while minimizing the need for additional shallow infill drilling at the Ashram Zone. Six channels were systematically cut, perpendicular to regional banding/foliation, and sampled for a total of 10.11 m, at both A- and B-Zone mineralized carbonatite outcrops along the perimeter of the intended pit shell (Table 9-4).

Table 9-4: 2022 Channel attributes

Prospect	Channel ID	Hole Type	Easting (m)	Northing (m)	Elevation (m)	Claim ID	Azimuth (°)	Dip (°)	Length (m)
Ashram	ECCS22-CH01	TR	536,187	6,311,997	293	2087790	230°	-60°	1.1
Ashram	ECCS22-CH02	TR	536,131	6,312,039	295	2087790	N/A	-90°	0.7
Ashram	ECCS22-CH03	TR	536,101	6,312,080	291	2087790	230°	-70°	1.5
Ashram	ECCS22-CH04	TR	536,099	6,312,061	296	2087790	230°	-60°	1.5
Ashram	ECCS22-CH05	TR	536,190	6,312,320	282	2087790	230°	0°	4.8
Ashram	ECCS22-CH06	TR	536,110	6,312,051	297	2087790	N/A	-90°	0.5

Notes: All coordinates reported are in NAD 83, UTM Zone 19 coordinate system. 2022 channel start positions were surveyed by Real-Time Kinematic (RTK) GPS.

A total of 13 channel samples of approximately 5 cm-wide saw-cut, were tagged, described and photographed by the field geologists, before being bagged and sealed for analysis by field technicians. All channel samples were described using the same geological logging templates in MX Deposit used for conventional drill core observations for the Ashram Project. Each surface channel start and endpoint were surveyed using high-sensitivity RTK-GPS (real time kinematic), capable of determining the channel locations with a high degree of precision compared to any hand-held GPS device. Surveys were completed on all 2022 surface channels by a registered Québec Land Surveyor of Gascon Arpenteurs-Géomètres Inc. (Montréal, QC) using a Leica GS18T Global Navigation Satellite System (GNSS) Real Time Kinematic (RTK) Rover.



10. Drilling

The following section provides an overview of drilling activities completed on the Eldor Property between 2013-2022, and include excerpts and summaries from assessment reports, technical reports, and field memos associated with these campaigns. All prior drilling programs conducted by Commerce Resources Corp. on the Property are summarized in Chapter 6 (History).

10.1 Drilling Campaigns

Since the previous MRE published on July 5, 2012 (Gagnon et al., 2012), Commerce has completed an additional seven diamond drilling programs on the Property, 2013–2016, 2019, 2021, and 2022. Drill attributes of holes drilled prior to 2013 are listed in Gagnon et al. (2012). Table 10-1 summarizes the drilling program attributes.

Table 10-1: Drilling program attributes

Year	Area of the Property	Number of Holes	Total drilled (m)
2013	Ashram	12	1,176.89
	Total (2013)	12	1,176.89
2014	Ashram	12	1,556.61
	Total (2014)	12	1,556.61
2015	Ashram	48	4,878.41
	Total (2015)	48	4,878.41
2016	Ashram	14	2,010.44
	Total (2016)	14	2,010.44
2019	Mallard	5	1,049.16
	Total (2019)	5	1,049.16
2021	Mallard	3	681.00
	Miranna	4	668.00
	Ashram	12	2,814.00
	Total (2021)	19	4,163.00
2022	Mallard	3	600.00
	Ashram	12	2,778.63
	Total (2022)	15	3,378.63



Attributes for individual drill holes completed at the Ashram Deposit are presented in Table 10-2. Ashram drill hole locations are presented in Figure 10-1, and Mallard and Miranna locations are in Figure 10-2.

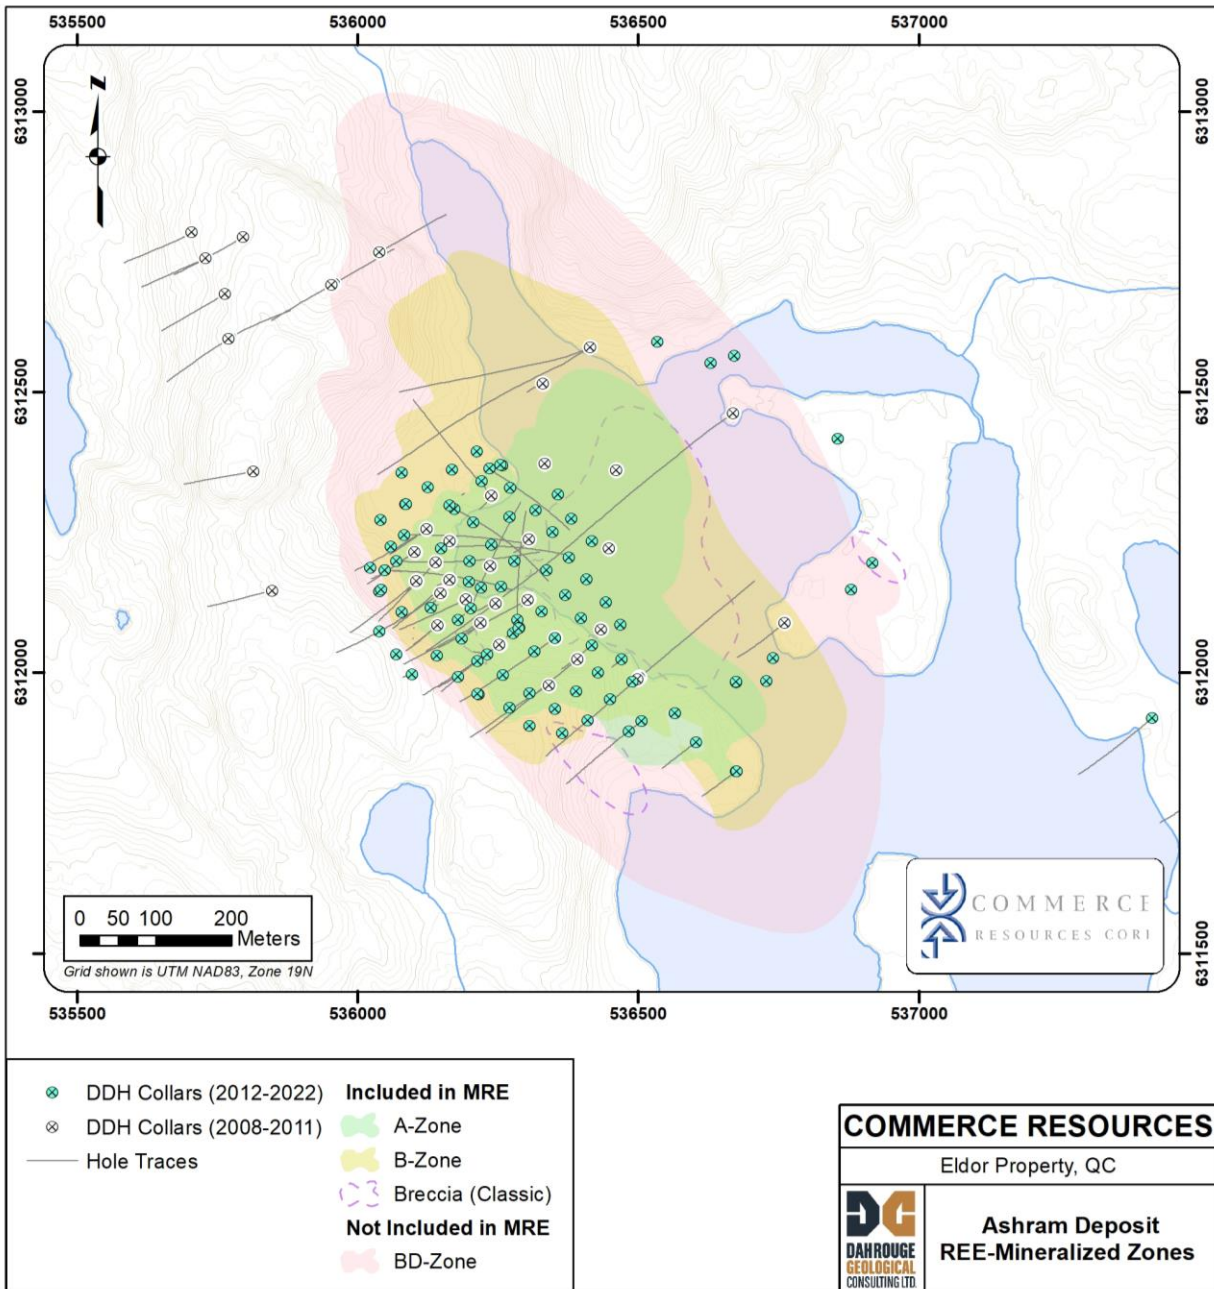


Figure 10-1: Ashram Deposit drill hole locations

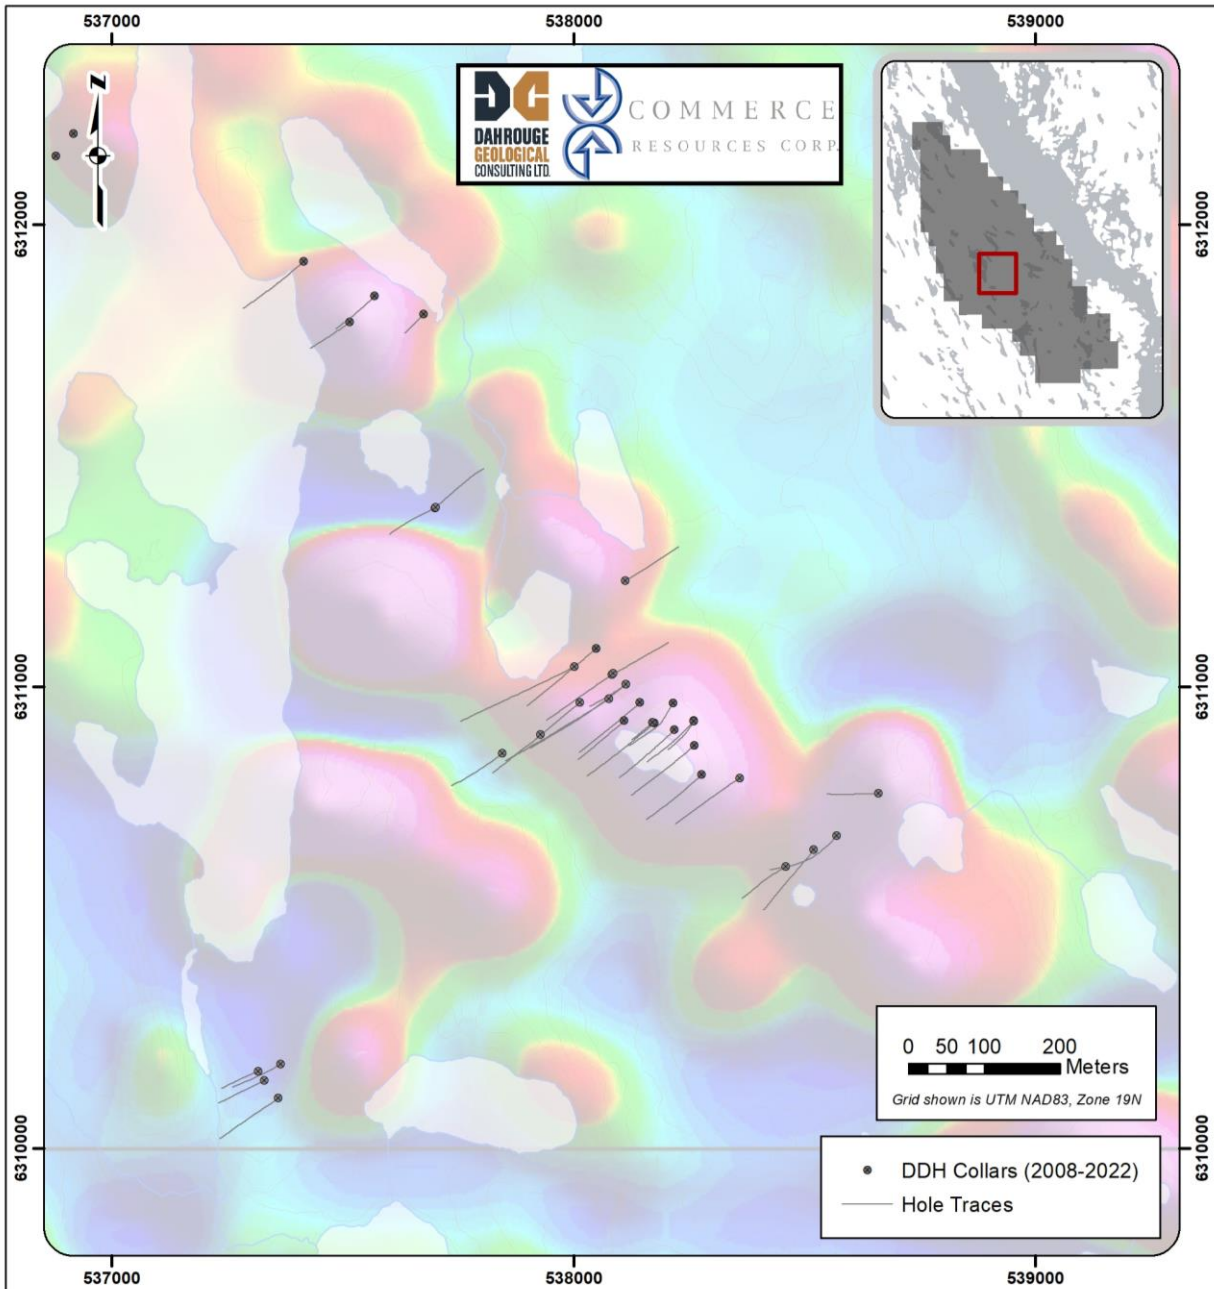


Figure 10-2: Mallard and Miranna drill hole locations – Magnetic first vertical derivative base map



Table 10-2: Attributes for individual diamond drill holes completed at the Ashram Deposit

Hole ID	Core Size	Area	Easting (m) ⁽¹⁾	Northing (m) ⁽¹⁾	Elevation (m)	Claim ID	Azimuth (°)	Dip (°)	EoH (m)
EC13-087	NQ	Ashram (Deposit, Land)	536,059	6,312,225	284.48	2087790		-90	85.14
EC13-088	NQ	Ashram (Deposit, Land)	536,259	6,311,997	283.87	2087790		-90	97.48
EC13-089	NQ	Ashram (Deposit, Land)	536,351	6,312,063	279.82	2087790		-90	152.55
EC13-090	NQ	Ashram (Deposit, Land)	536,287	6,312,080	280.36	2087790		-90	7.62
EC13-090A	NQ	Ashram (Deposit, Land)	536,287	6,312,080	280.44	2087790		-90	160.63
EC13-091	NQ	Ashram (Deposit, Land)	536,164	6,312,299	279.74	2087790		-90	133.20
EC13-092	NQ	Ashram (Deposit, Land)	536,221	6,312,342	282.17	2087790		-90	82.04
EC13-093	NQ	Ashram (Deposit, Land)	536,168	6,312,363	282.47	2087790		-90	105.77
EC13-094	NQ	Ashram (Deposit, Land)	536,041	6,312,273	281.41	2087790		-90	69.20
EC13-095	NQ	Ashram (Deposit, Land)	536,390	6,311,967	288.48	2087783		-90	133.21
EC13-096	NQ	Ashram (Deposit, Land)	536,351	6,311,936	291.73	2087783		-90	93.71
EC13-097	NQ	Ashram (Deposit, Land)	536,271	6,311,938	290.96	2087783		-90	56.34
EC14-098	NQ	Ashram (Deposit, Lake)	536,200	6,312,199	278.97	2087790		-90	194.16
EC14-099	NQ	Ashram (Deposit, Lake)	536,220	6,312,152	278.97	2087790		-90	192.02
EC14-100	NQ	Ashram (Deposit, Lake)	536,280	6,312,200	279.04	2087790		-90	194.16
EC14-101	NQ	Ashram (Deposit, Lake)	536,238	6,312,228	278.91	2087790		-90	172.53
EC14-102	NQ	Ashram (Deposit, Lake)	536,206	6,312,269	278.80	2087790		-90	136.00
EC14-103	NQ	Ashram (Deposit, Lake)	536,336	6,312,183	278.97	2087790		-90	157.58
EC14-104	NQ	Ashram (Dyke, Lake)	536,630	6,312,553	278.99	2087791		-90	20.70
EC14-105	NQ	Ashram (Dyke, Lake)	536,728	6,311,985	278.93	2087791		-90	23.72
EC14-106	NQ	Ashram (Deposit, Lake)	536,370	6,312,139	279.04	2087790		-90	139.29
EC14-107	NQ	Ashram (Deposit, Lake)	536,271	6,312,279	278.80	2087790		-90	154.53
EC14-108	NQ	Ashram (Dyke, Land)	536,917	6,312,196	280.41	2087791		-90	17.63
EC14-109	NQ	Ashram (Deposit, Land)	536,328	6,312,109	279.15	2087790		-90	154.29



Hole ID	Core Size	Area	Easting (m) ⁽¹⁾	Northing (m) ⁽¹⁾	Elevation (m)	Claim ID	Azimuth (°)	Dip (°)	EoH (m)
EC15-110	NQ	Ashram (Deposit, Lake)	536,381	6,312,275	279.03	2087790		-90	115.21
EC15-111	NQ	Ashram (Deposit, Lake)	536,418	6,312,235	278.96	2087790		-90	124.36
EC15-112	NQ	Ashram (Deposit, Lake)	536,376	6,312,206	279.12	2087790		-90	157.89
EC15-113	NQ	Ashram (Deposit, Lake)	536,442	6,312,126	278.97	2087790		-90	127.41
EC15-114	NQ	Ashram (Deposit, Lake)	536,398	6,312,098	279.07	2087790		-90	128.32
EC15-115	NQ	Ashram (Deposit, Lake)	536,468	6,312,086	278.93	2087790		-90	81.69
EC15-116	NQ	Ashram (Deposit, Lake)	536,317	6,312,289	278.96	2087790		-90	154.84
EC15-117	NQ	Ashram (Deposit, Land)	536,470	6,312,025	280.29	2087790		-90	212.45
EC15-118	NQ	Ashram (Deposit, Land)	536,097	6,311,998	300.91	2087790		-90	203.19
EC15-119	NQ	Ashram (Deposit, Land)	536,086	6,312,301	280.71	2087790		-90	218.54
EC15-120	NQ	Ashram (Deposit, Lake)	536,357	6,312,318	278.96	2087790		-90	200.09
EC15-121	NQ	Ashram (Deposit, Lake)	536,347	6,312,251	278.87	2087790		-90	222.81
EC15-122	NQ	Ashram (Deposit, Lake)	536,407	6,312,167	279.00	2087790		-90	209.40
EC15-123	HQ	Ashram (Dyke, Lake)	536,675	6,311,984	278.96	2087791		-90	8.53
EC15-123A	NQ	Ashram (Dyke, Lake)	536,674	6,311,983	279.01	2087791		-90	166.73
EC15-124	NQ	Ashram (Dyke, Lake)	536,741	6,312,027	278.91	2087791		-90	10.36
EC15-125	NQ	Ashram (Dyke, Land)	536,879	6,312,148	280.32	2087791		-90	7.06
EC15-126	NQ	Ashram (Dyke, Land)	536,855	6,312,417	280.78	2087791		-90	10.67
EC15-127	NQ	Ashram (Dyke, Lake)	536,671	6,312,566	278.98	2087791		-90	11.28
EC15-128	NQ	Ashram (Dyke, Land)	536,534	6,312,590	279.97	2087791		-90	26.00
EC15-129	HQ	Ashram (Deposit, Land)	536,255	6,312,371	279.30	2087790		-90	200.00
EC15-130	HQ	Ashram (Deposit, Land)	536,257	6,312,370	279.24	2087790		-90	62.00
EC15-131	HQ	Ashram (Deposit, Land)	536,042	6,312,148	290.66	2087790		-90	200.00
EC15-132	HQ	Ashram (Deposit, Land)	536,039	6,312,146	291.10	2087790		-90	62.00
EC15-133	HQ	Ashram (Deposit, Lake)	536,198	6,312,163	278.28	2087790		-90	239.00



Hole ID	Core Size	Area	Easting (m) ⁽¹⁾	Northing (m) ⁽¹⁾	Elevation (m)	Claim ID	Azimuth (°)	Dip (°)	EoH (m)
EC15-134	HQ	Ashram (Deposit, Lake)	536,255	6,312,154	278.09	2087790		-90	200.00
EC15-135	HQ	Ashram (Deposit, Land)	536,214	6,311,963	292.95	2087783		-90	203.00
EC15-136	HQ	Ashram (Deposit, Land)	536,216	6,311,962	292.72	2087783		-90	68.00
EC15-137	NQ	Ashram (Deposit, Land)	536,490	6,311,985	279.70	2087790		-90	203.30
EC15-138	NQ	Ashram (Deposit, Land)	536,417	6312,050	279.13	2087791	230	-65	160.63
EC15-139	NQ	Ashram (Deposit, Land)	536,271	6,312,330	279.18	2087790		-90	151.49
EC15-140	NQ	Ashram (Tailings-D)	535,322	6,316,749	227.78	2111163		-90	8.190
EC15-141	NQ	Ashram (Tailings-D)	535,465	6,317,551	221.71	2118789		-90	10.85
EC15-142	NQ	Ashram (Tailings-D)	536,630	6,317,186	250.79	2111166		-90	59.80
EC15-143	HQ	Ashram (Deposit, Land)	536,125	6,312,331	280.51	2087790		-90	203.00
EC15-144	NQ	Ashram (Process Plant)	536,528	6,313,197	321.93	2087799		-90	142.65
EC15-145	NQ	Ashram (Process Plant)	536,508	6,313,280	321.85	2087799		-90	20.44
EC15-146	NQ	Ashram (Process Plant)	536,574	6,313,225	323.64	2087799		-90	23.77
EC15-147	NQ	Ashram (Process Plant)	536,575	6,313,280	323.78	2087799		-90	21.03
EC15-148	NQ	Ashram (Process Plant)	536,535	6,313,250	322.48	2087799		-90	36.27
EC15-149	NQ	Ashram (Process Plant)	536,487	6,313,733	309.02	2087799		-90	57.21
EC15-150	HQ	Ashram (Tailings-C)	537,107	6,314,116	295.23	2087810		-90	41.00
EC15-151	HQ	Ashram (Tailings-C)	537,104	6,314,114	295.31	2087810		-90	11
EC15-152	HQ	Ashram (Tailings-C)	537,098	6,314,114	295.84	2087810		-90	5.30
EC15-153	HQ	Ashram (Tailings-C)	536,737	6,314,791	312.70	2087820		-90	41.00
EC15-154	HQ	Ashram (Tailings-C)	536,739	6,314,787	312.65	2087820		-90	5.00
EC15-155	HQ	Ashram (Tailings-C)	535,764	6,315,178	307.24	2087818		-90	41.00
EC15-156	HQ	Ashram (Tailings-C)	535,765	6,315,175	307.24	2087818		-90	4.65
EC16-157	NQ	Ashram (Deposit, Land)	536,483	6,311,896	282.65	2087784		-90	270.02
EC16-158	NQ	Ashram (Deposit, Land)	536,429	6,312,000	284.46	2087790		-90	224.64



Hole ID	Core Size	Area	Easting (m) ⁽¹⁾	Northing (m) ⁽¹⁾	Elevation (m)	Claim ID	Azimuth (°)	Dip (°)	EoH (m)
EC16-159	NQ	Ashram (Deposit, Land)	536,306	6,311,905	294.64	2087783		-90	200.25
EC16-160	HQ	Ashram (Deposit, Land)	536,085	6,312,300	280.57	2087790		-90	197.10
EC16-161	NQ	Ashram (Deposit, Land)	536,079	6,312,356	280.71	2087790		-90	108.91
EC16-162	NQ	Ashram (Deposit, Land)	536,078	6,312,109	291.00	2087790		-90	108.91
EC16-163	NQ	Ashram (Deposit, Land)	536,022	6,312,187	288.98	2087790		-90	108.81
EC16-164	NQ	Ashram (Deposit, Land)	536,038	6,312,074	302.01	2087790		-90	53.28
EC16-165	NQ	Ashram (Deposit, Land)	536,069	6,312,033	301.74	2087790		-90	54.74
EC16-166	NQ	Ashram (Deposit, Land)	536,141	6,312,031	295.46	2087790		-90	112.02
EC16-167	NQ	Ashram (Deposit, Land)	536,450	6,311,953	284.06	2087783		-90	203.50
EC16-168	NQ	Ashram (Deposit, Land)	536,410	6,311,916	287.80	2087783		-90	148.44
EC16-169	NQ	Ashram (Deposit, Land)	536,365	6,311,893	291.14	2087783		-90	139.29
EC16-170	NQ	Ashram (Deposit, Land)	536,179	6,311,993	294.97	2087790	223	-60	80.53
EC19-171	NQ	Mallard	538,110	6,310,926	285.01	1007658	230	-45	182.16
EC19-172	NQ	Mallard	538,144	6,310,965	285.43	1007658	230	-45	240.00
EC19-173	NQ	Mallard	538,049	6,311,082	237.96	1007660	230	-45	276.00
EC19-174	NQ	Mallard	538,171	6,310,922	279.67	1007658	230	-45	81.00
EC19-174A	NQ	Mallard	538,174	6,310,921	279.67	1007658	230	-45	270.00
EC21-175	NQ	Mallard	538,218	6,310,906	284.00	1007658	230	-45	221.00
EC21-176	NQ	Mallard	538,261	6,310,873	280.05	1007658	230	-45	239.00
EC21-177	NQ	Mallard	538,277	6,310,809	282.00	1007657	230	-45	221.00
EC21-178	NQ	Miranna	537,675	6,311,806	282.36	1007659	230	-65	140.00
EC21-179	NQ	Miranna	537,569	6,311,845	287.00	1007659	230	-45	152.00
EC21-180	NQ	Miranna	537,515	6,311,789	278.00	1007659	230	-45	140.00
EC21-181	NQ	Miranna	537,416	6,311,920	276.00	2087785	230	-45	236.00
EC21-182	NQ	Ashram (Deposit, Land)	536,212	6,312,394	280.24	2087790		-90	152.00
EC21-183	NQ	Ashram (Deposit, Land)	536,172	6,312,292	279.38	2087790	120	-45	302.00
EC21-184	NQ	Ashram (Deposit, Land)	536,148	6,312,222	279.76	2087790	90	-45	302.00
EC21-185	NQ	Ashram (Deposit, Land)	536,131	6,312,116	285.12	2087790		-90	224.00
EC21-186	NQ	Ashram (Deposit, Land)	536,179	6,312,094	283.99	2087790		-90	227.00



Hole ID	Core Size	Area	Easting (m) ⁽¹⁾	Northing (m) ⁽¹⁾	Elevation (m)	Claim ID	Azimuth (°)	Dip (°)	EoH (m)
EC21-187	NQ	Ashram (Deposit, Land)	536,202	6,312,115	279.84	2087790	20	-45	302.00
EC21-188	NQ	Ashram (Deposit, Land)	536,306	6,311,964	291.05	2087783		-90	200.00
EC21-189	NQ	Ashram (Deposit, Land)	536,315	6,312,039	280.96	2087790		-90	152.00
EC21-190	NQ	Ashram (Deposit, Land)	536,230	6,312,033	284.21	2087790		-90	224.00
EC21-191	NQ	Ashram (Deposit, Land)	536,214	6,312,021	285.99	2087790		-90	224.00
EC21-192	NQ	Ashram (Deposit, Land)	536,186	6,312,061	286.13	2087790		-90	227.00
EC21-193	NQ	Ashram (Deposit, Land)	536,285	6,312,094	279.97	2087790	0	-45	278.00
EC22-194	NQ	Ashram (Deposit, Land)	536,506	6,311,914	282.88	2087784	230	-45	255.00
EC22-195	NQ	Ashram (Deposit, Land)	536,603	6,311,876	283.33	2087784	230	-45	110.00
EC22-196	NQ	Ashram (Deposit, Land)	536,277	6,312,070	280.92	2087790		-90	236.00
EC22-197	NQ	Ashram (Deposit, Land)	536,069	6,312,199	285.88	2087790	90	-45	395.00
EC22-198	NQ	Ashram (Deposit, Land)	536,048	6,312,184	287.70	2087790	90	-53	50.00
EC22-198A	NQ	Ashram (Deposit, Land)	536,048	6,312,183	287.70	2087790	90	-53	410.00
EC22-199	NQ	Ashram (Deposit, Land)	536,083	6,312,246	280.95	2087790	90	-54	382.63
EC22-200	NQ	Ashram (Deposit, Land)	536,235	6,312,364	281.52	2087790	124	-45	281.00
EC22-201	NQ	Mallard	538,260	6,310,926	285.25	1007658	230	-45	200.00
EC22-202	NQ	Mallard	538,260	6,310,926	285.27	1007658	230	-65	200.00
EC22-203	NQ	Mallard	538,215	6,310,964	285.11	1007658	230	-45	200.00
EC22-204	NQ	Ashram (Deposit, Land)	536,675	6,311,825	280.84	2087784	230	-45	110.00
EC22-205	NQ	Ashram (Deposit, Land)	536,675	6,311,825	280.88	2087784	0	-90	95.00
EC22-206	NQ	Ashram (Deposit, Land)	536,565	6,311,928	283.19	2087784	230	-45	152.00
EC22-207	NQ	Ashram (Deposit, Land)	536,566	6,311,928	283.14	2087784	0	-90	302.00

(1) Coordinate system NAD83 / UTM Zone 19N.



2013 Drilling Program

The diamond drilling program in 2013 was carried out from late July through August 2013, with a total of 1,176.89 m (NQ) over 12 holes completed.

Bodnar Drilling Ltd. of Ste Rose du Lac, MB, was contracted to complete the work. A Zinex A5, with a capability of drilling NQ core to depths of approximately 700 m was used for the program. All drilling was completed as land-based infill and step-out holes at the Ashram Deposit, within the anticipated pit shell as defined in the historical PEA report (Gagnon et al., 2012).

Holes were located based on a 50 m x 50 m grid superimposed on the known deposit, in the best practical way, so as to incorporate the drilling already completed. The main objectives of drilling were to upgrade the Inferred mineral resources to the Indicated and/or Measured categories, as well as further delineate the extent of REE mineralization at the Deposit. An on-site D5 CAT was used to prepare access and mobilize the drill from site to site.

The 2013 drilling program was highly successful, resulting in an expansion of the Ashram Deposit by approximately 60 m to the northwest and the discovery of REE mineralized material at surface within the pit shell, where waste rock had been modelled. The 2013 drilling was concentrated over two areas of the deposit, the Northwest (five holes), and the Southeast (seven holes).

The holes in the northwest portion of the Deposit (EC13-087, 091, 092, 093 and 094) all collared in REE mineralization with overburden ranging from approximately 1.0 m to 4.2 m. Strong REE mineralization was intersected in each hole including 2.27% TREO over 60 m in EC13-087, and 2.00% TREO over 129 m in EC13-091.

All seven holes completed at the southeastern end of the Deposit (EC13-088, 089, 090, 090A, 095, 096, and 097) collared in mineralization that continued along their entire lengths, apart from minor lamprophyres occurrences. Overburden thickness ranged from 2.90 m to 8.00 m. Strong REE mineralization was intersected in each hole including 2.06% TREO over 92 m in EC13-088, and 2.15% TREO over 61 m in EC13-089.

2014 Drilling Program

The diamond drilling program was carried out from March to May of 2014, with a total of 1,556.61 m (NQ) over 12 holes completed.



Bodnar Drilling Ltd. of Ste Rose du Lac, MB, was contracted to complete the work. A Zinex A5, with the capability of drilling NQ core to depths of approximately 700 m was used for the program. Drilling was completed as lake-based and land-based infill and geotechnical holes. Nine of the 12 holes were drilled for infill purposes with all but one infill hole drilled on Centre Pond. All infill holes were terminated at predefined depths below the proposed pit shell bottom, for the purpose of the ongoing PFS. Three of the 12 holes were drilled for geotechnical purposes; two were drilled on Centre Pond and one was drilled on land. These holes were shallow and drilled to assist with the evaluation of the proposed dyke location. Data collected from these geotechnical holes included soil type, depth to bedrock, and the assessment of bedrock type and competency.

Holes were located based on a 50 m x 50 m grid superimposed on the known deposit, in the best practical way, so as to incorporate the drilling already completed. The main objectives of drilling were to upgrade the Inferred mineral resources to the Indicated and/or Measured categories. An on-site D5 CAT was used to prepare access and mobilize the drill from site to site.

The 2014 drilling program was highly successful, returning well mineralized intervals with high ratio of TbDy and NdPr.

The nine infill holes drilled within the defined extent of the Ashram Deposit, collared in mineralization that continued along their entire lengths, apart from minor lamprophyres occurrences. Overburden ranged from 0.88 m to 11.28 m. Strong mineralization was intersected in each hole including 2.13% TREO over 173 m in EC14-099, 2.01% TREO over 81 m in EC14-099, and 1.97% TREO over 162 m in EC14-101.

2015 Drilling Program

Drilling was completed in two phases consisting of a winter portion focused on the Ashram Deposit area (REE), and a summer portion focused on regional targets related to infrastructure site assessment in support of the Ashram Project's development. The primary objective of the drilling campaign was to increase the resource confidence of the Ashram Deposit from the current Inferred category to the Indicated and/or Measured categories, as well as complete all geomechanical and hydrogeological work required in support of the Project's advancement to a PFS.

Bodnar Drilling Ltd. of Ste Rose du Lac, MB, was contracted to complete the drilling work for the 2015 programs. A Zinex A5 heli-portable drill rig, with the capability of drilling NQ and HQ core sizes, was used for the program. Drill mobilization for holes around the Ashram Deposit were typically completed with a D5 CAT located on site, while regional holes or those with poor ground conditions were helicopter supported. The drill rig remained on the Property upon the completion of the 2015 drilling program with demobilization deferred.



Phase I drilling program was completed between January 18 and May 12, 2015 and included 31 holes totalling of 4,146.25 m (drill holes EC15-110 to EC15-139). Both NQ (22 holes for 2,904 m) and HQ (9 holes for 1,243 m) size drill cores were completed with depths ranging from ~7 m to 239 m. All Phase I holes were oriented vertically except for EC15-138, which was oriented at approximately 230°/65°. Of the 31 holes completed during Phase I, a total of 24 focused on resource definition of the Ashram Deposit on land and over ice from Centre Pond, and a total of seven drill holes were completed along the proposed dyke location across Centre Pond for geotechnical/geomechanical purposes (EC15-123 to EC15-128).

Phase II drilling program was completed between June 23 and August 12 and included 17 holes totalling of 732.16 m (drill holes EC15-140 to EC15-156). Both NQ (nine holes for 380 m) and HQ (eight holes for 352 m) size drill cores were completed with depths ranging from ~5 m to 203 m. Phase II program focused on geotechnical and condemnation drilling at sites proposed for infrastructure development as part of the Ashram Project. This included site options for proposed tailings management facilities, as well as the process plant. Drill hole EC15-149 was completed solely as a condemnation hole between the proposed process plant and tailings management facility site options, while drill holes EC15-142 and 144 were completed as joint geotechnical-condemnation holes. Phase II also included one drill hole (EC15-143) completed at the north end of the Ashram Deposit.

2016 Drilling Program

Over the course of the 2016 drilling program, 14 drill holes totalling 2,010.44 m were completed (EC16-157 to EC16-170) to delineate the deposit margins, as well as to provide holes for hydrogeological testing. Several drill holes were completed as twins at several locations to accommodate instrument installation downhole. Thirteen NQ drill holes (1,817 m) and one HQ drill hole (197 m) were completed, with all drill holes oriented vertically except for EC15-170, which was oriented at approximately 223°/60°. The drill holes were focused along the northern, western, and southern margins of the Ashram Deposit.

Bodnar Drilling Ltd. of Ste Rose du Lac, MB, was contracted to complete the drilling work for the 2016 program. A Zinex A5 heli-portable drill rig, with the capability of drilling NQ and HQ core sizes, was used for the program. Drill mobilization for holes around the Ashram Deposit were typically completed with a D5 CAT located on site, poor ground conditions required some helicopter support. A full demobilization of the drill rig was completed following the 2016 drilling program.

Unfortunately, the program was paused shortly after the completion of the drilling with core processing and sampling only partially completed. The core remained inside tents on the Property for the remainder of the 2016 field season until processing and sample collection was completed in the second half of 2017. As such, no sample shipping or analysis was completed in 2016 on the drill core.



2019 Drilling Program

Between March 26 and April 24, 2019, an NQ core size diamond drilling program of five holes, totalling 1,049.16 m, was completed at the Mallard Prospect within the Southwest Area of the Niobium Claim Group Property by Saville Resources (see Chapter 6 for details). The drilling program was completed as follow-up to strongly encouraging historical drilling and surface work, as well as a desktop technical review completed by the Company. No drilling was completed at other targets on the Property.

The Mallard Prospect is the most advanced target on the Property, with a total of 2,490 m over nine drill holes completed historically (prior to the 2019 program). The objective of the 2019 program was to further characterize the near-surface mineralized trend and potential at the Mallard Prospect and immediate area. Specifically, the primary objective was to further delineate and test the southeastern extension of the high-grade and near-surface mineralized intercepts returned from historical drill hole EC10-033, including 0.72% Nb₂O₅ over 21.35 m (4.22 m to 25.57 m), and 0.82% Nb₂O₅ over 21.9 m (58.93 m to 80.82 m). A secondary objective was to further test the northwestern extension of the trend with a step-back to historical drill hole EC10-032 (0.71% Nb₂O₅ over 15.3 m).

Dahrouge supervised and managed the program, with Avataa-Rouillier Drilling of Kuujuaq, QC, part of Le Groupe Rouillier, contracted for drilling services, and Panorama Helicopters of Alma, QC, contracted to provide the helicopter services.

Four drill holes (EC19-171, 172, 174 and 174A) tested the southeastern extension of the high-grade and near-surface mineralized intercepts returned historically from drill hole EC10-033. Drill hole EC19-174A was re-collared of EC19-174, which was unexpectedly lost at a depth of 81 m due to driller error. A single drill hole (EC19-173) was also completed as an approximate 60 m step-back of historical drill hole EC10-032 where high-grade, near-surface mineralization had been returned. This drill hole was positioned to further test this intercept down dip as well as the strike extension of the main mineralized zone to the northwest.

The 2019 program was highly successful with drill holes EC19-171 and 172 significantly extending the niobium mineralized strike length to the southeast, while drill hole EC19-173 extended mineralization further along strike to the northwest.



2021 Drilling Program

The 2021 exploration consisted of follow-up drilling at the Mallard Prospect, and initial drill testing of at the Miranna Prospect, both within the Southwest Area of the Property. The helicopter supported drilling program consisted of seven holes totalling 1,349.0 m split between the two prospects, Mallard (681.0 m over three holes) and Miranna (668.0 m over four holes). The entire drilling program was completed over 42 days, between July 9 and August 19, 2021, inclusive of drill rig mobilization, drilling, core processing, and shipping of all core samples from the Property.

The initial three holes of the drilling program, completed at the Mallard Prospect (EC21-175, 176 and 177), were designed as 50 m step-outs along strike to the southeast of the high-grade intersection in hole EC19-174A, which was completed as the final drill hole of the 2019 program and returned 1.36% Nb₂O₅ over 4.5 m, within a larger interval of 0.80% Nb₂O₅ over 31.5 m (Smith D.L., 2021).

The objective of the 2021 program was to test the interpreted northwestern extension of the mineralized trend (extending from Mallard) at the Miranna Prospect, which had not previously been drill tested. The Miranna Prospect is characterized by a distinct, magnetic high geophysical anomaly at the apex of a high-grade niobium-tantalum mineralized boulder train. The maiden drilling program at Miranna consisted of four drill holes (EC21-178, EC21-179, EC21-180 and EC21-181) and was designed to test different areas of the geophysical anomaly that defines the prospect—the north-northwest margin (EC21-181), east-northeast margin (EC21-178 and 179), and the anomaly centre (EC21-180)—with the overarching objective of identifying the most prospective area for follow-up.

Dahrouge supervised and managed the program, with Logan Drilling of Stewiacke, NS, part of Logan Drilling Group International, contracted for drilling services, and Panorama Helicopters of Alma, QC, contracted to provide the helicopter services.

The 2021 drilling program was highly successful, with the Mallard drill holes EC21-175, 176 and 177, significantly extending the niobium mineralized strike length to the southeast. This drilling returned the highest and widest intervals of niobium mineralization to date at Mallard (EC21-175), with mineralization remaining open in all directions. Drill hole EC21-175 returned 1.00% Nb₂O₅ over 17.1 m, within a larger interval of 0.82% Nb₂O₅ over 42.3 m. Additionally, drill hole EC21-176 returned 1.06% Nb₂O₅ over 3.8 m, within a larger interval of 0.84% Nb₂O₅ over 12.4 m. Collectively, the 2021 drilling program demonstrated the presence of wide widths of >1% Nb₂O₅ material present at Mallard.



Favourable grades of tantalum and phosphate also continue to be present in the niobium mineralized zones. Additionally, well-mineralized fluorite zones were encountered in the 2021 Mallard drill holes, supporting the previously interpreted extension of the fluorite zone to the southeast.

At Miranna, the drilling was also very successful with drill hole EC21-180 returning significant mineralization downhole, including 1.20% Nb₂O₅ over 3.1 m within a larger interval of 0.72% Nb₂O₅ over 20.4 m. The drill hole also collared in mineralization from 4.8 m depth, returning 0.61% Nb₂O₅ over 7.9 m. Drill hole EC21-180 was collared in the central area of the anomaly and confirmed the presence of very high niobium grades (>1% Nb₂O₅) in the bedrock at Miranna. Mineralization at Miranna remains open in all directions.

2022 Drilling Program

The 2022 drilling program was divided into two phases, whereby Phase I focused solely on the Mallard Prospect and consisted of three helicopter supported NQ size diamond drill holes, totalling 600.0 m. The drilling was completed between August 19 and 25, 2022, with core processing completed between September 8 and 19, 2022. Phase II consisted of 12 NQ size diamond drill holes, totalling 2,778.6 m that were completed between July 29 and August 31, 2022 and focused on the Ashram Deposit. The drill hole plan was developed to target a revised pit shell that could accommodate a production scenario approximately 50% higher than that considered in the Project's 2012 PEA, and would add additional drilling density to support a pit-optimized MRE. All six infill drill holes (EC22-196 to 200 and EC22-198A) were collared along the perimeter of the deposit pit shell design and targeted specific regions of the pit at depth. The six additional drill holes (EC22-194 to 195 and EC22-204 to 207) focused on testing and defining the southeastern extent of the Ashram Deposit's mineralized footprint and improve the geological model for the deposit.

The three drill holes drilled during Phase I completed at the Mallard Prospect in 2022 (EC22-201, 202 and 203) were designed to undercut (approximately 40 m to 50 m step-back) the best drill hole intercepts from 2019 and 2021. Specifically, they were designed to undercut drill intercepts of 0.80% Nb₂O₅ over 31.5 m, including 1.36% Nb₂O₅ over 4.5 m (EC19-174A), 0.82% Nb₂O₅ over 42.3 m, including 1.00% Nb₂O₅ over 17.1 m (EC21-175), and 1.06% Nb₂O₅ over 3.8 m (EC21-176). The Mallard Prospect is the most advanced target on the Property, with a total of 4,220.1 m over 17 drill holes completed historically and by Commerce prior to the 2022 program. The Company's objective for the 2022 drilling program at Mallard was to test high-grade niobium mineralization of the target area at depth and expand the overall mineralized zone.



Dahrouge supervised and managed the program, with Fusion Drilling of Hawkesbury, ON, part of Forage Fusion Drilling Ltd., contracted for drilling services, and Panorama Helicopters of Alma, QC, contracted to provide the helicopter services. A Discovery 1 heli-portable drill rig, with the capability of drilling NQ core sizes, was used for the program. Drill mobilization for all holes during the 2022 drilling program at Ashram were helicopter-supported.

The 2022 drilling program, more limited in scope than previous years, was successful in expanding the niobium mineralized zone at Mallard, although did not intersect 1+% Nb₂O₅ material over as wide a width as that returned in the prior drilling program (2021). Strong niobium mineralization was still encountered in all three of the 2022 drill holes completed at the Mallard Prospect and, collectively with the previous drilling, indicated a wide mineralized footprint that remains open in all directions. In drill hole EC22-202, high-grade mineralized intervals are present near surface (0.78% Nb₂O₅ over 16.0 m, including 1.07% Nb₂O₅ over 3.0 m) and at depth (0.94% Nb₂O₅ over 4.5 m). This hole returned seven samples >1.0% Nb₂O₅, to a peak of 1.30% Nb₂O₅ over 1.5 m, and ended in mineralization with a final sample assaying 0.57% Nb₂O₅. Additionally, drill hole EC22-201 ended in mineralization with a final sample assaying 0.54% Nb₂O₅ as well as ending within a high-grade tantalum interval (380 ppm Ta₂O₅ over 8.0 m). Favourable grades of tantalum and phosphate also continue to be present in the niobium mineralized zones.

Phase II consisted of 12 NQ size diamond drill holes, totalling 2,778.6 m, which were completed between July 29 and August 31, 2022. The 2022 drill hole plan was developed to target a revised pit shell that could accommodate a production scenario approximately 50% higher than that considered in the Project's 2012 PEA and would add additional drilling density to support a pit-optimized MRE. All six infill drill holes (EC22-196 to 200 and EC22-198A) were collared along the perimeter of the deposit pit shell design and targeted specific regions of the pit at depth. The six additional drill holes (EC22-194 to 195 and EC22-204 to 207) focused on testing and defining the southeastern extent of the Ashram Deposit's mineralized footprint and improve the geological model for the deposit.

All resource pit infill drill holes collared in mineralization from surface and remained mineralized along their entire length, i.e., mineralization remains open beyond the base of the pit shell. All holes returned grades of total REO and NdPr distributions consistent with previous drilling within the main REE-mineralized footprint of the Ashram Deposit (A+B Zones). Highlights include 392.8 m at 2.12% REO (21.6% NdPr; EC22-197), 379.1 m at 2.04% REO (21.4% NdPr; EC22-199), and 406.4 m at 1.99% REO (21.3% NdPr; EC22-198A). Additionally, several wide intervals with ≥24% NdPr distribution were returned including 36.0 m at 1.56% REO (24.0% NdPr; EC22-198A), 32.6 m at 1.34% REO (25.8% NdPr; EC22-196), as well as 13.8 m at 1.54% REO (26.9% NdPr) and 11.1 m at 1.40% REO (33.3% NdPr; EC22-200).



Six additional drill holes completed as part of the 2022 Ashram drilling program, with the objective of improving the geological model at the southern end of the Deposit where mineralization remains open (EC22-194, 195, 204, 205, 206 and 207). These holes successfully confirmed several primary geological contacts as well as returning numerous moderate to well-mineralized intervals including 180.1 m at 1.59% REO (21.5% NdPr; EC22-207) and 25.5 m at 1.82% REO (20.8% NdPr; EC22-194). Drill hole EC22-195 extended the Ashram Deposit southern extent by approximately 100 m with a wide intersection of lower-grade A-Zone lithology (58.7 m at 0.83% REO (23.2% NdPr)). Geochemical analysis of logged A-Zone in drill hole 205 has now extended mineralization an additional ~90 m as the most southerly step-out, with relatively small intersections of lower-grade A-Zone, including 6.9 m at 1.01% REO (23.0% NdPr; EC22-205). These REO grades and intersections are lower than that of the main deposit and, coupled with adjacent lithologies, indicate the southerly contact of the Ashram Deposit is proximal.

10.2 Structure

To date, no oriented drill coring has been completed; however, downhole optical and acoustic televiwer surveys have been completed on multiple holes to assess overall structure of the rocks at the Ashram Deposit (Table 10-3). The surveying was completed by DGI Geoscience Inc. in 2015. This data has guided the geological model supporting the maiden MRE presented herein.

Table 10-3: DGI Survey summary table for selected drill holes

Hole	Survey Depth (m)	ATV	OTV	Poly Res	MagIC	Caliper	Flowmeter
EC15-117	205	X	X	X	X	X	Lost Probe
EC15-119	211	X	X	X	X	X	X
EC15-120	192	X	X	X	X	X	X
EC15-122	200	X	X	X	X	X	X
EC13-093	100	X	X	X	X	X	X
EC13-095	127	X	X	X	X	X	X
EC13-097	53	X	X	X	X	X	X
EC15-129	194	X	X	X	X	X	X
EC13-090A	152	X	X	X	X	X	X
EC15-121	215	X	X	X	X	X	X
EC15-118	196	X	X	X	X	X	X
EC15-131	185	X	X	X	X	X	X
EC11-064	639	X	X	X	X	X	X
EC15-133	233	X	X	X	X	X	X

X is for completed survey methods as of April 12, 2015.



10.3 Collar Survey

Each drill hole collar (EC13-087 to EC22-207) was surveyed with an RTK tool (Topcon GR5 or Leica GS18T GNSS Rover) except for EC15-142 and EC19-171 to EC21-181, which were surveyed using a handheld GPS (Garmin GPSMAP 64s). All collar survey data has been validated by the Project's geologists on site, and by the database lead.

10.4 Downhole Survey

From 2013 to 2016, all downhole orientation surveys were completed using a Reflex EZ-Trac multi-shot tool for all holes except for holes EC15-123, 125 to 127, 140, 151, 152, 154 and 156, which were drilled in 2015. No survey was completed on these holes as their main purpose was geotechnical with holes ending typically only a few metres into the bedrock. In 2019, downhole orientation surveys were completed using a Reflex EZ-Gyro tool on all drill holes. Downhole orientation surveys for the 2021 and 2022 drilling programs were completed using a Reflex Gyro Sprint-IQ tool down to the final depth for each drill hole.

10.5 Core Logging and Sampling Procedures

All drill core handling was done on site with logging and sampling processes following industry best practices by employees and contractors of Commerce or Dahrouge. Drill cores of NQ and HQ sizes were placed in wooden core boxes and collected twice a day at the drill site, then transported to the core logging facilities. Upon receipt of the drill core samples at the core logging facility at Camp Valcourt, the core box information and driller's blocks were confirmed while the senior geologist on site performed a quick log review of the cores (major lithologies, mineralization). All drill core samples were then pieced together, oriented to maximum foliation, and metre-marked. Detailed drilling and collar information was recorded (including hand-held or RTK collar location, casing details, downhole survey types, drill rig type, core size, and various other parameters), while core technicians recorded and described geotechnical attributes (TCR, RQD and ISRM). Geological logging (lithology, mineralization, alteration, structure) and core sampling intervals were defined by a logging geologist.

Between 2013 and 2020, geotechnical data and observations of lithology, structure, alteration, mineralization, sample number, and location were recorded in MS Excel by the geologists and geotechnicians, or in hard copy then compiled in MS Excel. Starting in the 2021 drilling campaign, data collection and validation have been fully transitioned to MX Deposit, Seequent's (Bentley Systems) cloud-based core logging and database software; all prior (pre-2021) data has been migrated into MX Deposit, in addition to the 2021 and 2022 data. Copies of the database are stored on external hard drive for security and merged with the main Dahrouge office server periodically throughout the programs.



Core processing prior to 2021 also required logging geologists to record a brief description of each individual core sample prior to sampling. Sample-scale descriptions were no longer required as part of the core logging observations beginning in 2021. Prior to cores being cut for sampling, all core boxes were photographed using a digital camera in natural light (dry and wet photos). UV light (black light) to outline the fluorescent minerals was a common core processing procedure throughout the years, but these were eliminated from regular procedures in 2021. For all programs, the core boxes were identified with Box Number, Hole ID, "From", and "To" using aluminum tags.

Sampling intervals were determined by the geologist based on observations of the lithology and mineralization. In addition to visual examination of drill cores, the geologists also used a portable XRF analyser, a handheld magnetic susceptibility/conductivity probe, a handheld gamma-ray scintillometer, and a handheld spectrometer to help identify the lithologies and define the mineralized intervals. The typical sampling length is between 1.0 and 1.5 m, but can vary according to lithological variation within the mineralized carbonatite.

All marked drill core samples were saw-cut into two halves using a conventional core saw, with one half-core placed in a new polyurethane bag along with one of three triplicate sample tags for assay, and the other half-core was left in the core box for future reference. Where a duplicate core sample was indicated, the half-core remaining in the box was cut in half again, producing two quarter-core pieces with one collected for analysis and the other remaining in the core box for reference. In addition to quarter-core duplicates, the QA/QC insertions included systematic insertion of quartz blanks, certified reference materials, pulp and reject duplicates. A duplicate sample tag was stapled in the core box to identify the location of each core sample, duplicate, blank, and certified reference material collected. The sample tag number was also written directly on the core with a grease-marker.

Systematic collection of specific gravity (SG) measurements using the water immersion method were collected as part of all drilling programs from 2013 to 2022. In order to eliminate sampler bias and improve reproducibility of specific gravity measurements, it was decided in 2015 to modify the methodology by using the entire length of selected half-core (or quarter-core) samples for the water immersion method, instead of only using a sub-sample within selected core intervals.

The remaining triplicate sample tag was archived with the Project documents. The samples were then catalogued and placed in labelled and sealed pails or rice bags for shipping. The sample shipment forms were prepared on site with one copy inserted in one of the shipment pails or rice bags, one digital copy emailed to the analytical laboratory's sample reception manager, one digital copy kept for reference. The samples were transported on a regular basis by Commerce or Dahrouge employees or contractors. The shipping route consisted in sending the samples on chartered float plane to Kuujuaq, using Canadian North Cargo to Montréal then ground transportation to Actlabs in Ancaster, Ontario.



11. Sample Preparation, Analyses, and Security

This section is based on information supplied by Dahrouge, on behalf of Commerce, and observations made during the independent verification program conducted at the Project site by Pierre-Luc Richard, P.Geo. and QP, from PLR on September 19 and 20, 2021.

Commerce Resources Corp. contracted Dahrouge Geological Consulting Ltd. for the management of the exploration work for the Eldor Property. Exploration work at the Property is managed from the field camp "Camp Valcourt", which provides the office, core logging, core cutting, and core storage facilities for the Project.

The evaluation of the geological setting and mineralization on the Property includes observations and sampling from surface (through mapping, grab samples, channels, and trenches), but is principally based on information and sampling from diamond drilling. The drill core logging and sampling was conducted at the Property. All samples collected by Dahrouge during the course of the 2012 to 2022 exploration programs were sent to Activation Laboratories Ltd. (Actlabs) in Ancaster, Ontario, for preparation and analysis. The remaining drill core is currently stored at the storage facilities located at Camp Valcourt.

BBA and PLR validated the exploration processes and core sampling procedures used by Dahrouge, on Commerce's behalf, as part of an independent verification program. The QP concluded that the drill core handling, logging and sampling protocols are at conventional industry or better standards and conform to generally accepted best practices. The QP considers that the samples quality is good and that the samples are generally representative. Finally, the QP is confident that the database is suitable for the estimation of a Mineral Resource Estimate.

11.1 Sample Preparation and Analytical Procedure

All drill core samples, surface rock samples, and channel samples collected during the 2013-2022 exploration programs were shipped to Actlabs in Ancaster, Ontario, for preparation and analysis by Commerce representatives and contracted consultants or companies.

All samples received at Actlabs are inventoried and typically weighted. Drying is done to samples having excess humidity. Sample material is crushed in a jaw and/or roll crusher to 80% passing 10 mesh, followed by a 250-g riffle split to obtain a sub-sample, which is then pulverized to 95% passing 105 μ using a single component (flying disk) or a two component (ring and puck) ring mill (package RX1). The pulp material is then analyzed using lithium metaborate/tetraborate fusion followed by Inductively Coupled Plasma (ICP) for the major oxides and by Inductively Coupled Plasma Mass Spectrometry (ICP-MS) for a series of 57 elements, which include the REEs (Actlabs code 8-REE package by fusion ICP and ICP/MS). The element F is analyzed using fusion ion



selective electrode (ISE) (Actlabs code 4F-F). Areas on the Property that were explored for niobium prospectivity during drilling and surface rock sampling campaigns from 2015–2022 were analyzed for Nb₂O₅, Ta₂O₅ and major oxides by fusion X-ray fluorescence (package 8-Coltan XRF + Major Oxides). The Actlabs Ancaster facility is an accredited laboratory under ISO/IEC 17025 standards.

11.2 Quality Assurance / Quality Control

In addition to the laboratory quality assurance quality control protocol (QA/QC) routinely conducted by Actlabs using pulp duplicate analysis, Dahrouge on behalf of Commerce implemented an internal QA/QC protocol consisting of the insertion of certified reference materials (CRMs) as analytical standards, quartz blanks, core duplicates, pulp duplicates, and coarse reject duplicates on a systematic basis with samples shipped to Actlabs. The insertion rate of these QA/QC materials is approximately 4.5% to 5% of the total samples collected. Pierre-Luc Richard did not visit the Actlabs facilities or conduct an audit of the laboratories. However, senior technical advisor in REE & Nb, Darren L. Smith, did visit the Ancaster facilities during March of 2012.

11.2.1 Blanks

For the 2013-2023 drilling campaigns, blanks consisted of approximately 0.4 kg to 0.5 kg of clean quartz pieces (1-4 cm grain size) from a third-party supplier. The quartz blank material (termed 'QtzBlk' in the database) is sourced from the Jim Coleman Crystal Mines Inc., Arkansas, USA. The blanks are inserted into the sample series at a rate of one for every 25 samples, or approximately 4.5% of samples collected.

A total of 554 blank samples were inserted during the various drilling and exploration campaigns on the Property, with 98.9% reported as passing, and only six blank samples were considered as failures. The same six samples failed the threshold value for Dy, La, Nd, and Tb, but passed for Pr.

Table 11-1 shows the threshold values applied and the number of failed samples. Total rare earth element (TREE) levels in quartz blanks were closely tracked to monitor for any emerging trends over several assay batches, as was recommended by SGS-Geostat in the prior technical report for the Ashram REE Deposit on July 5, 2012. A failure threshold of approximately 500 ppm TREE is implemented during review of analytical results, and the laboratory is notified when developing trends emerge that suggest contamination; internal investigations may be triggered by the laboratory if blank failures are found to be systematic and require correction and/or modification of procedures at the preparation facility.



Table 11-1: Quartz blank results summary (2013-2022)

Element	Blank Type	Laboratory	Quantity Inserted	Mean Grade (ppm)	Upper Process Limit (ppm)	Failed (Outliers)	(%) Passing Quality Control
Dy	'QtzBlk'	Actlabs	554	1.8	10	6	98.9
La		Actlabs	554	105.1	300	6	98.9
Nd		Actlabs	554	56.1	250	6	98.9
Tb		Actlabs	554	0.4	2	6	98.9
Pr		Actlabs	554	17.1	80	5	99.1
Overall			554			6	98.9

As part of the laboratory QA/QC protocol, Actlabs inserts analytical blanks in the sample series. A review of the results from the laboratory blanks inserted by Actlabs shows that all blanks returned values below detection limit suggesting that there is no systematic contamination of the samples.

The QP is of the opinion that no significant contamination is observed in the database based on the Blanks program.

11.2.2 Certified Reference Materials

Four CRMs were used throughout the 2013-2022 drilling programs – TRM-2, OREAS 146, OREAS 463 (primarily used as REEs CRMs) and OREAS 465 (primarily used as a Nb₂O₅ CRM). Results are shown in Table 11-2, Table 11-3, Table 11-4 and Figure 11-4 respectively. In their procedure, the Company's database geologists set a warning when an element was ± 2 standard deviations of the certified value and was considered a failure if above ± 3 standard deviations of the certified value, as defined in each CRMs analytical certificate. The CRMs are inserted into the sample series at a rate of one for every 25 samples, or approximately 4.5% of samples collected, not including duplicates. For the QA/QC review the QP focused on five elements that are included in the NMR calculations (Dy; La; Nd; Pr; Tb) and also included Nb₂O₅.

In 2011, a four laboratory round robin survey for the reference material TRM-2 was completed by Dahrouge, on behalf of Commerce, to investigate why the analytical values for many of the rare earth elements returned by Actlabs were below their certified values for that CRM. Data from the round robin survey suggests that the certified analytical values for many of the rare earth elements in TRM-2 are too high and that further analytical work should be carried out to confirm and generate industry accepted provisional values for primary use. CRM TRM-2 stopped being used after the 2016 drilling program and yield mixed results.



Table 11-2: Certified reference material results with OREAS 146

OREAS 146	Standard Supplier	Laboratory	Certified Value (ppm)	Quantity Inserted	Mean Grade (ppm)	Lower Process Limit (Certified - 3SD)	Upper Process Limit (Certified + 3SD)	Failed (Element Outliers)	(%) Passing Quality Control
Dy	OREAS	Actlabs	224	283	218	176	272	1	99.6
La	OREAS	Actlabs	2,513		2,552	1,958	3,068	1	99.6
Nd	OREAS	Actlabs	2,182		2,188	1,606	2,758	1	99.6
Pr	OREAS	Actlabs	548		542	440	656	1	99.6
Tb	OREAS	Actlabs	47.2		45	37	57	1	99.6
				283				1	99.6

Table 11-3: Certified reference material results with OREAS 463

OREAS 463	Standard Supplier	Laboratory	Certified Value (ppm)	Quantity INSERTED	Mean grade (ppm)	Lower Process Limit (Certified - 3SD)	Upper Process Limit (Certified + 3SD)	Failed (Element Outliers)	(%) Passing Quality Control
Dy	OREAS	Actlabs	70	45	72	61	79	0	100.0
La	OREAS	Actlabs	4,966		4,976	4,549	5,383	0	100.0
Nd	OREAS	Actlabs	3,682		3,654	3,127	4,237	0	100.0
Pr	OREAS	Actlabs	1,004		982	875	1,133	0	100.0
Tb	OREAS	Actlabs	20.3		22	17.45	23	8	82.2
				45				0	100.0

Table 11-4: Certified reference material results with TRM-2

TRM-2	Standard Supplier	Laboratory	Certified Value (ppm)	Quantity Inserted	Mean Grade (ppm)	Lower Process Limit (Certified - 3SD)	Upper Process Limit (Certified + 3SD)	Failed (Element Outliers)	(%) Passing Quality Control
Dy	TRM	Actlabs	206	425	167	185	227	423	0.5
La	TRM	Actlabs	19,300		18,033	17,371	21,229	26	93.9
Nd	TRM	Actlabs	8,800		8,028	7,921	9,679	128	69.9
Pr	TRM	Actlabs	2,800		2,604	2,521	3,079	75	82.4
Tb	TRM	Actlabs	54.6		40	49.14	60	424	0.2
				425				-	49.4



Table 11-5: Certified reference material results with OREAS 465

OREAS 465	Standard Supplier	Laboratory	Certified Value (ppm)	Quantity Inserted	Mean Grade (ppm)	Lower Process Limit (Certified - 3SD)	Upper Process Limit (Certified + 3SD)	Failed (Outliers)	(%) Passing Quality Control
Nb	OREAS	Actlabs	0.6695	93	0.60	0.5402	0.7988	0	100.0
				93				0	100.0

Failing rate for both OREAS standards (146 and 463) is low when we look at the five key payable rare earth elements. Excellent results were obtained for OREAS 146, with a passing rate of 99.6%. Average grades are accurate in respect of the certified value. Unfortunately, OREAS 146 is now discontinued from circulation, but the Company will continue to use their existing inventory of this CRM on future programs at the Property until it is entirely depleted.

Certified reference material OREAS 463 only reported some failures with element Tb, yielding a passing rate of 82.2%. The failure rate for this element should be investigated, but is not considered critical.

Concerns were raised about CRM TRM-2 during the previous technical report for the Ashram Deposit (July 5, 2012) whereas several rare earth elements reported by Actlabs biased consistently below the expected certified values for the CRM. This led to an analytical round robin investigation, which concluded that the certified values for the TRM-2 material are too high, and that further analytical work should be carried out to generate industry accepted provisional values. Results for Tb and Dy are problematic, having a passing rate of less than 1%. However, the mean results for all the rare earth elements yield a negative bias, so it seems that the results could be on the conservative side.

No failures were observed for CRM OREAS 465, one of the CRMs used most commonly for the investigation of Nb exploration drilling on the Eldor Property. The mean grade of the 93 assays is 10.4% lower than the certified value so it could mean that the values are slightly on the conservative side.

Based on the above, the QP is of the opinion that the database is suitable for the purpose of this Report, especially when only looking at payables elements. As stated above, it is recommended that additional investigation be conducted on some of the CRMs. In the future, Commerce should consider preparing its own analytical standard from materials collected at the Ashram Deposit and have it certified.



11.2.3 Quarter-Core Duplicates

As part of the Company's QA/QC protocol, quarter-core duplicates from 521 core samples were included in the Project sample series sent to Actlabs during work programs between 2013 and 2022. The drill core duplicates are inserted in the sample series at an average rate of one duplicate for every 25 samples (rate of 4.5%). Figure 11-1 to Figure 11-5 show the results of the quarter-core duplicate to original core sample for La, Nd, Pr, Tb, and Dy respectively. For all five of these payable REEs, the coefficient of determination (R^2) is good and shows good reproducibility (>94%) between original samples and the quarter-core duplicates, with only minor variance occurring in higher-grade results for the five individual REEs shown.

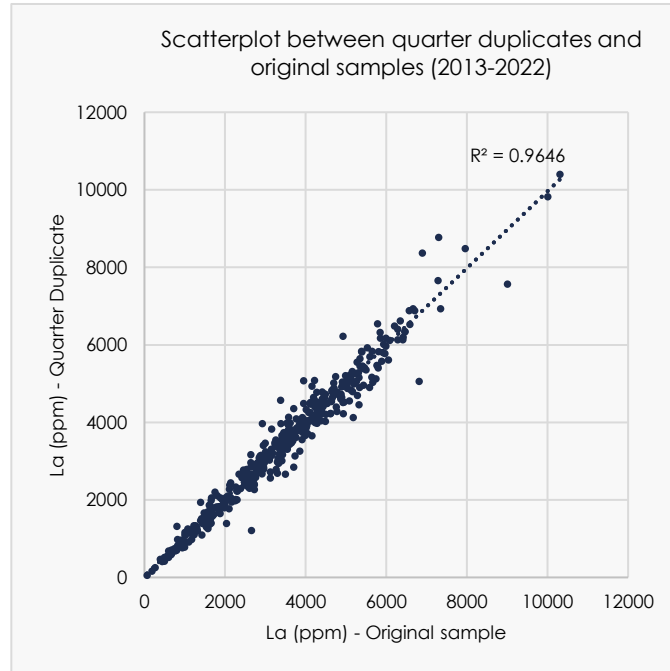


Figure 11-1: Lanthanum - Quarter duplicates and original samples (2013-2022)

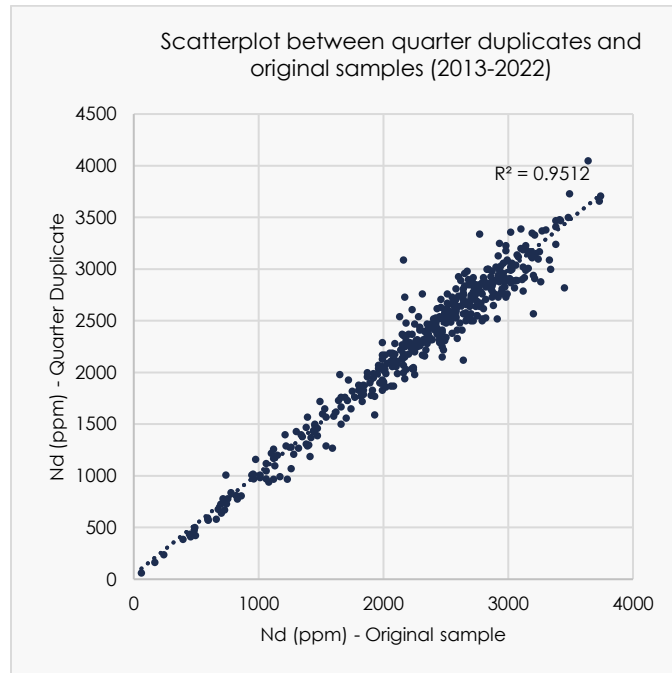


Figure 11-2: Neodymium - Quarter duplicates and original samples (2013-2022)

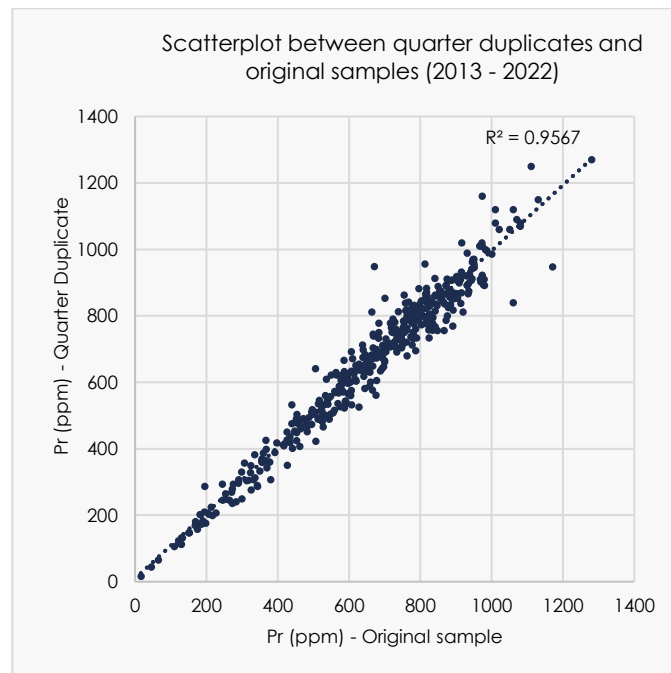


Figure 11-3: Praseodymium - Quarter duplicates and original samples (2013-2022)

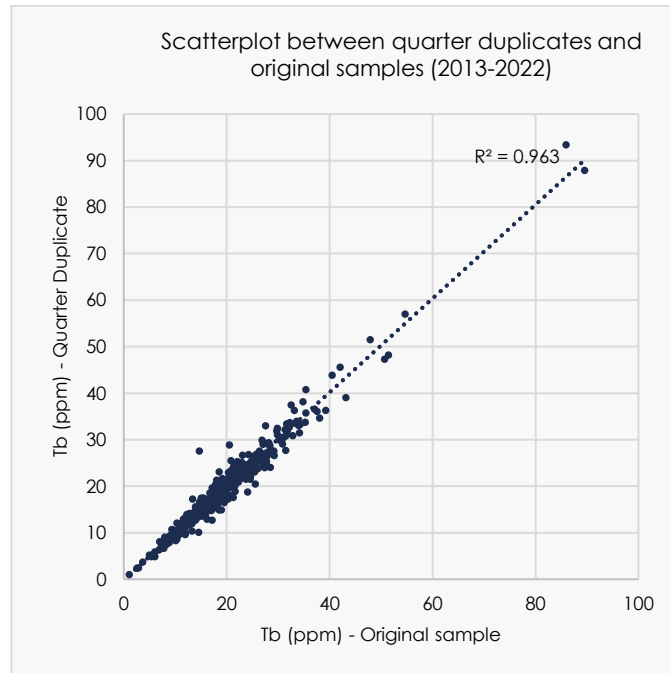


Figure 11-4: Terbium - Quarter duplicates and original samples (2013-2022)

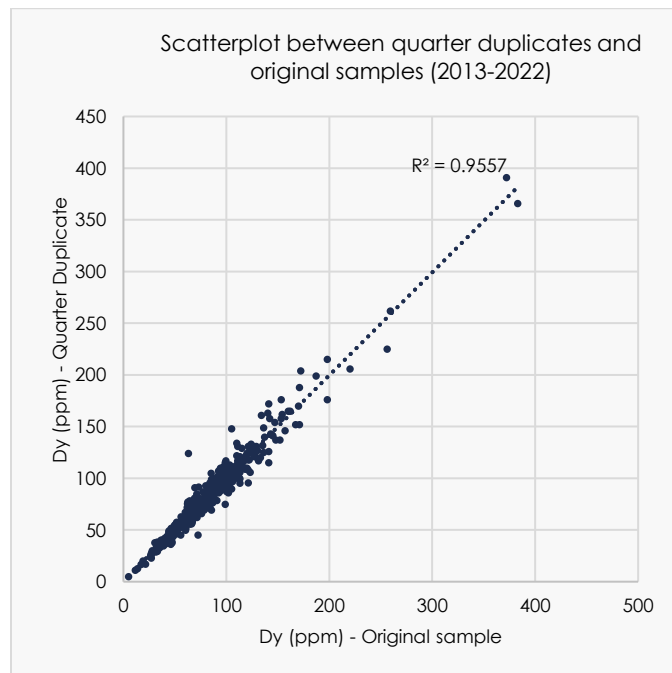


Figure 11-5: Dysprosium - Quarter duplicates and original samples (2013-2022)



11.2.4 Pulp Duplicates

A total of 358 pulp duplicates were collected from the 2013-2022 drilling programs (Figure 11-6, Figure 11-7, Figure 11-8, Figure 11-9 and Figure 11-10). All five key REEs show good reproducibility and a good coefficient of determination between the original sample and their pulp duplicate, with less than 1.5% outliers for any of the core-duplicate pairings.

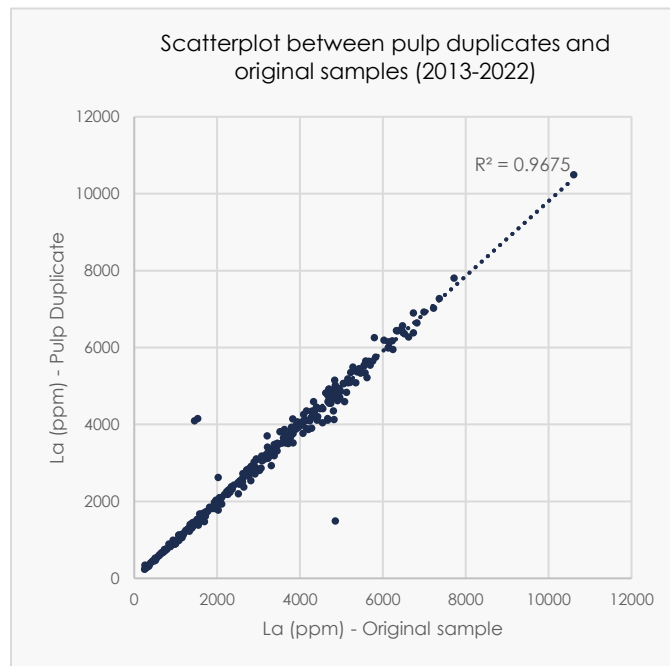


Figure 11-6: Lanthanum - Pulp duplicates and original samples (2013-2022)

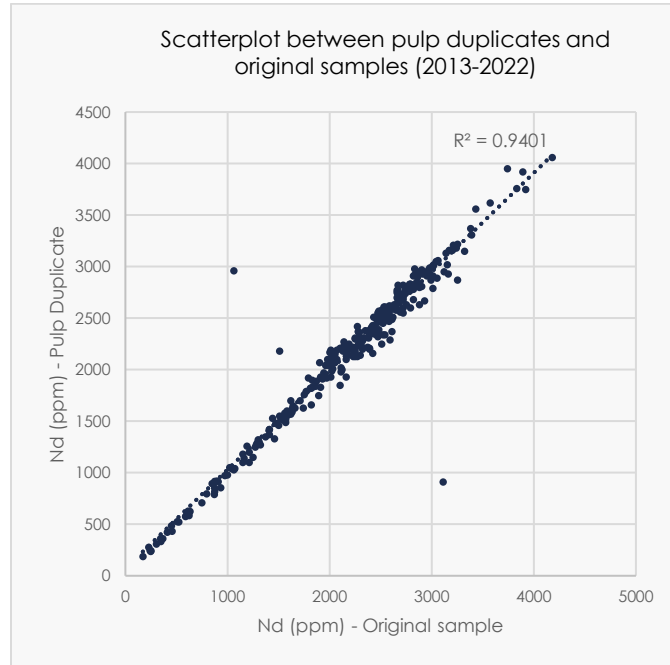


Figure 11-7: Neodymium - Pulp duplicates and original samples (2013-2022)

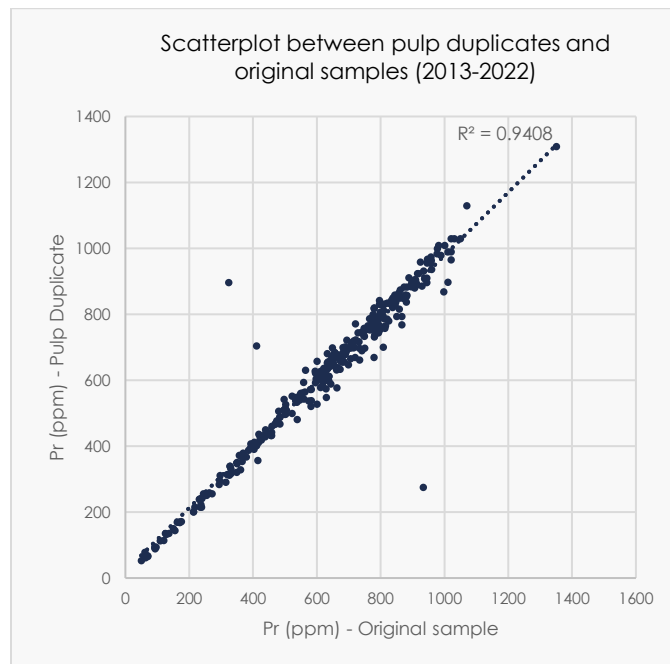


Figure 11-8: Praseodymium - Pulp duplicates and original samples (2013-2022)

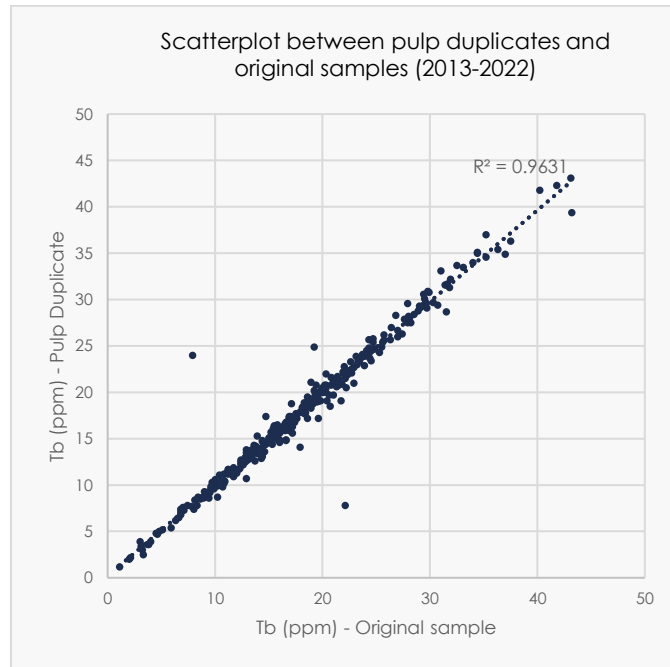


Figure 11-9: Terbium - Pulp duplicates and original samples (2013-2022)

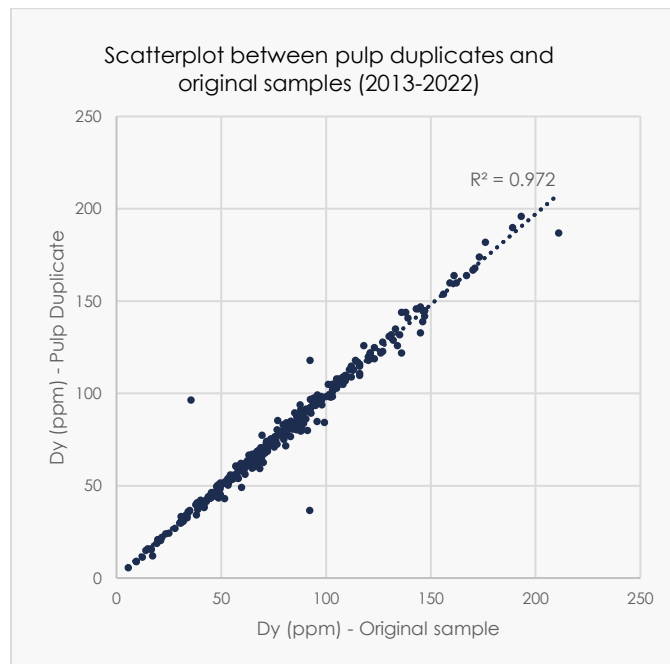


Figure 11-10: Dysprosium - Pulp duplicates and original samples (2013-2022)



11.2.5 External pulp duplicates (Secondary Laboratory Check)

A total of 312 pulp-split duplicates (Figure 11-11, Figure 11-12, Figure 11-13, Figure 11-14 and Figure 11-15), created at the primary laboratory (Actlabs) from core samples collected from the 2013-2021 drilling programs, were submitted for check analysis to ALS Canada's Vancouver, British Columbia, laboratory. At the time of this Report, external pulp duplicates from the 2022 drilling campaign were created, but have not yet been analyzed, and are currently stored at the Company's secured storage facility for analysis at a later date.

Upon receipt at Vancouver ALS laboratory facility, the pulp samples were re-homogenized via manual sheet rolling (preparation package ROL-21) and analyzed by lithium metaborate fusion followed by ICP-MS using packages ME-MS81h. Fluorine was analyzed by package F-ELE81a or F-ELE82 depending on abundance.

In all five key REEs (La, Nd, Pr, Tb, and Dy) shown, the coefficient of determination (R^2) comparing original core sample results with corresponding external pulp samples demonstrate excellent reproducibility between both laboratories Actlabs and ALS Canada. This check shows good reproducibility (>94%) between original samples and the quarter-core duplicates, with only minor variance occurring in higher-grade results for the five individual REEs shown.

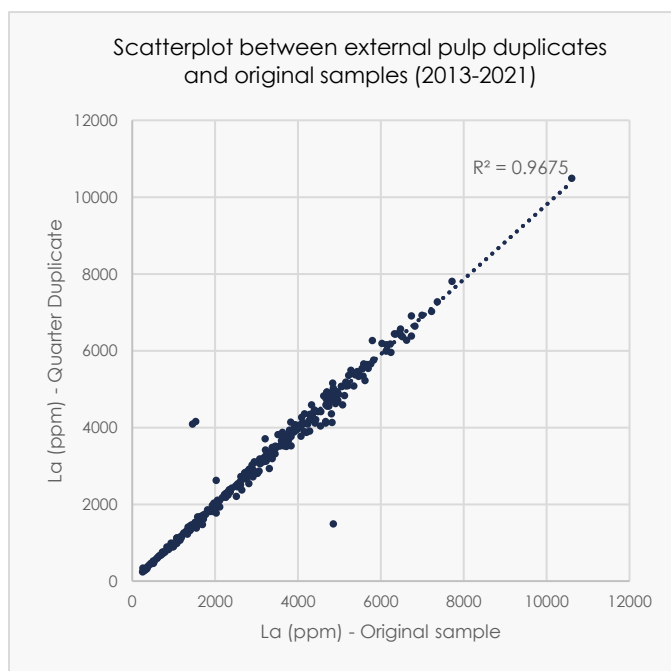


Figure 11-11: Lanthanum - External pulp duplicates and original samples (2013-2021)

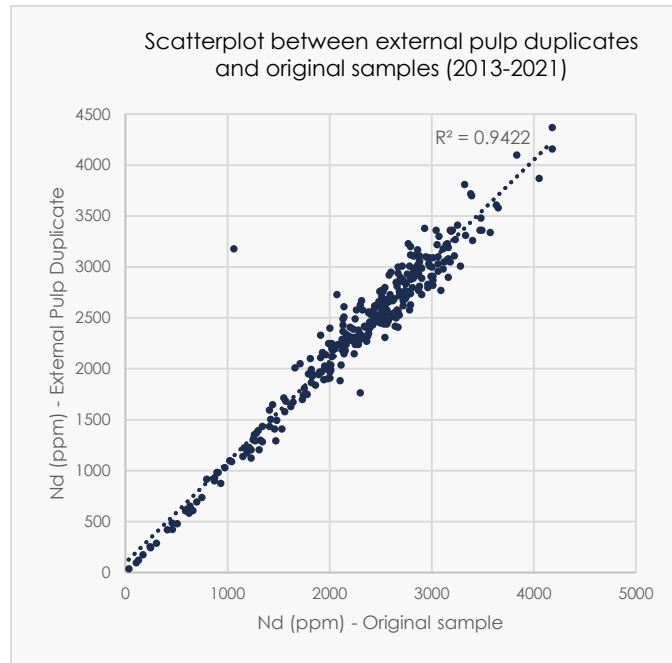


Figure 11-12: Neodymium - External pulp duplicates and original samples (2013-2021)

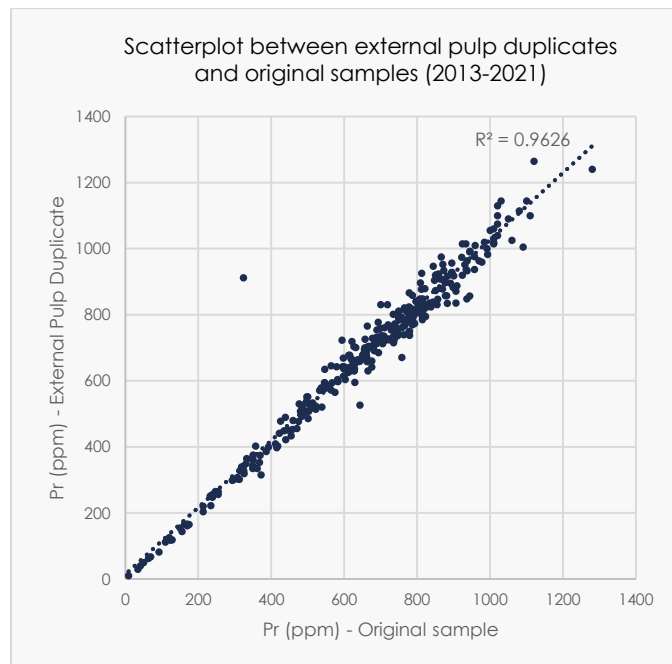


Figure 11-13: Praseodymium - External pulp duplicates and original samples (2013-2021)

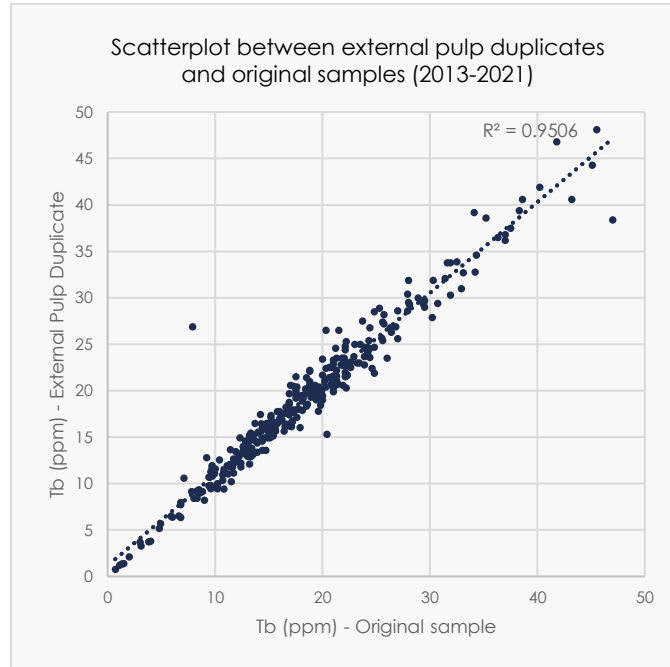


Figure 11-14: Terbium - External pulp duplicates and original samples (2013-2021)

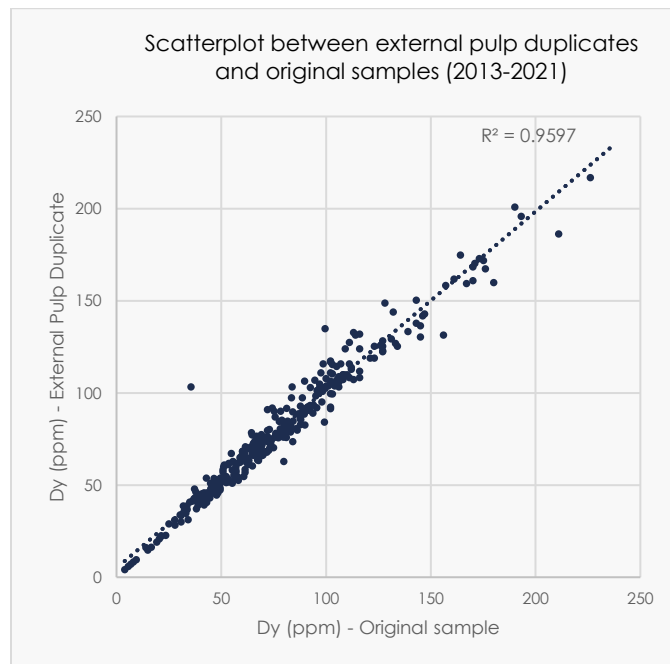


Figure 11-15: Dysprosium - External pulp duplicates and original samples (2013-2021)



11.3 Sample Security

The Company followed industry standard chain of custody methods and approach. Sample security and chain of custody for drill core started from removal of the core from the core barrel at the drill. Upon receipt of core at the core logging facility at Camp Valcourt, the custody transferred to the Company or its representatives for core processing. Once processing was completed, drill core samples were individually bagged and sealed into polyurethane bags, then placed in labelled and sealed pails or rice bags. A printed copy of the shipment form was inserted into one of the shipped pails or bags, and one digital copy emailed to the analytical laboratory sample reception manager. The drill core samples were shipped by third-party chartered float plane transport from camp to Kuujuaq, then Canadian North Cargo to Montréal, and finally ground transportation to Actlabs in Ancaster, Ontario.

11.4 Overall Qualified Person's Opinion

The sample preparation, analytical procedures, and security of the samples during these procedures followed industry best practices. Sufficient efforts were made to identify items that were out of specification.

The QA/QC data indicate that the overall assay results of the Company's drilling program are valid and can be relied upon for the purpose of this Report.

It is the QP's opinion that the sample preparation, security and analytical procedures are adequate and follow best practices.



12. Data Verification

The Mineral Resource Estimate in this Report is based on drill data from 2008 to 2022.

For the purpose of this MRE, the QP performed a basic validation on the entire database. All data were provided by Commerce in UTM NAD 83 Zone 19. The database close-out date for the resource estimate is December 19, 2023.

The Ashram database contains 213 surface diamond drill holes, six surface channels and 32,962 samples. Of these 213 drill holes, 117, for a total of 28,783 m, were used to interpolate the block model.

12.1 Site Investigation

Pierre-Luc Richard QP, of PLR Resources Inc., visited the Project from September 19 to 20, 2021. The site visit included a visual inspection of cores drilled by Commerce, as well as a field tour (Figure 10-1) and discussions of the geological interpretations with geologists employed by Commerce.



Figure 12-1: Ashram field tour and fly-over



The site visit also included a review of sampling and assaying procedures, the QA/QC program, downhole survey methodologies, and the descriptions (logging) of lithologies, alteration and structures (Figure 12-2). Selected drill collars in the field were also validated using a handheld GPS (Figure 12-3).



Figure 12-2: Core review during the QP site visit



Figure 12-3: Drill collar validation during the site visit



12.2 Drilling and Sampling Procedures

Commerce's procedures are described in Chapter 10 (Drilling) and Chapter 11 (Sample Preparation, Analyses, and Security). Discussions with geologists on site confirmed that said procedures were adequately applied.

The QP reviewed several sections of mineralized core while visiting the Project. All core boxes were labelled and properly stored. In the reviewed core boxes, sample tags were present, and it was possible to validate sample numbers and confirm the presence of mineralization in witness half-core samples from the mineralized zones (Figure 12-2).

Drilling was not underway during Mr. Richard's site visit, but the Commerce's geological consultants involved during the drilling programs explained the entire path of the drill core, from the drill rig to the logging and sampling facility and finally to the laboratory (Figure 12-4).



Figure 12-4: Core storage and sample preparation rooms



12.3 Database Validation

12.3.1 Assays

The QP was granted access to the original assay certificates for all holes drilled from Commerce included in the current MRE. The assays recorded in the database were compared to the original certificates from the laboratories and no significant discrepancies were detected.

12.3.2 Drill Hole Location

For the drilling carried out from 2008 to 2022, collars have been surveyed using precise equipment. The random field checks with a handheld GPS unit described above did not yield any discrepancies.

12.3.3 Downhole Survey

For the 2008 and 2010 drilling campaigns, Flexit SmartTool was used to measure the azimuth and dip of the drill holes. Measurement frequency varies, but is mostly at 45 m.

For the 2011, 2013, 2014, 2015, 2016, 2022 drilling campaigns, Reflex EZ-trac was used to measure the azimuth and dip of the drill holes. Measurement frequency varies but is mostly between 5 m to 15 m.

For the 2019 and 2021 drilling campaigns, Gyro Sprint-IQ was used to measure the azimuth and dip of the drill holes. Measurement frequency is at every 3 m.

Spurious measurements were removed from the database when judged invalid.

12.3.4 QA/QC

QA/QC reports were reviewed and did not yield any significant issues. More details are available in Chapter 11 (Sample Preparation, Analyses, and Security) of this Report.

12.4 Qualified Person's Opinion

The QP is of the opinion that the drilling protocols in place are adequate. The database for the Project is of good overall quality. Some recommendations for improvement have been made during the validation process, but have no material impact on the current MRE. In the QP's opinion, the Ashram database is suitable for mineral resource estimation.



13. Mineral Processing and Metallurgical Testing

13.1 Mineral Processing Test Work

13.1.1 Introduction

A number of mineral processing test work programs have been carried out on the Ashram Project to develop a beneficiation flowsheet to produce a rare earth mineral concentrate suitable for hydrometallurgical processing. The objective of the test work programs completed varied, with some investigating generating a high-grade mineral concentrate, others investigated producing a lower-grade mineral concentrate while maximizing REE recovery and generating a fluorspar by-product. The current objective of the beneficiation flowsheet is to create a high-grade mineral concentrate to reduce the complexity and cost of the hydrometallurgical processing.

Historical mineral processing test work campaigns include several test work programs at Hazen Research Inc. (Hazen) in Colorado, USA, UVR-FIA GmbH in Germany, Université Laval in Québec City, and CanmetMINING in Ottawa. These campaigns are not used as the basis for the current flowsheet and thus are not further discussed in this section.

The mineral processing test work discussed in this section is based on an ongoing program being completed at SGS Canada in Lakefield (SGS). This work has not yet been reported on and has been based on a beneficiation flowsheet development work completed by CanmetMINING in which a high-grade mineral concentrate was produced using a relatively simple flotation scheme.

13.1.2 Sample Selection and Characterization

Samples used for the flotation development work at SGS were collected as a bulk sample from outcrops. The bulk sample was collected from three locations shown in Figure 13-1 and combined for testing.

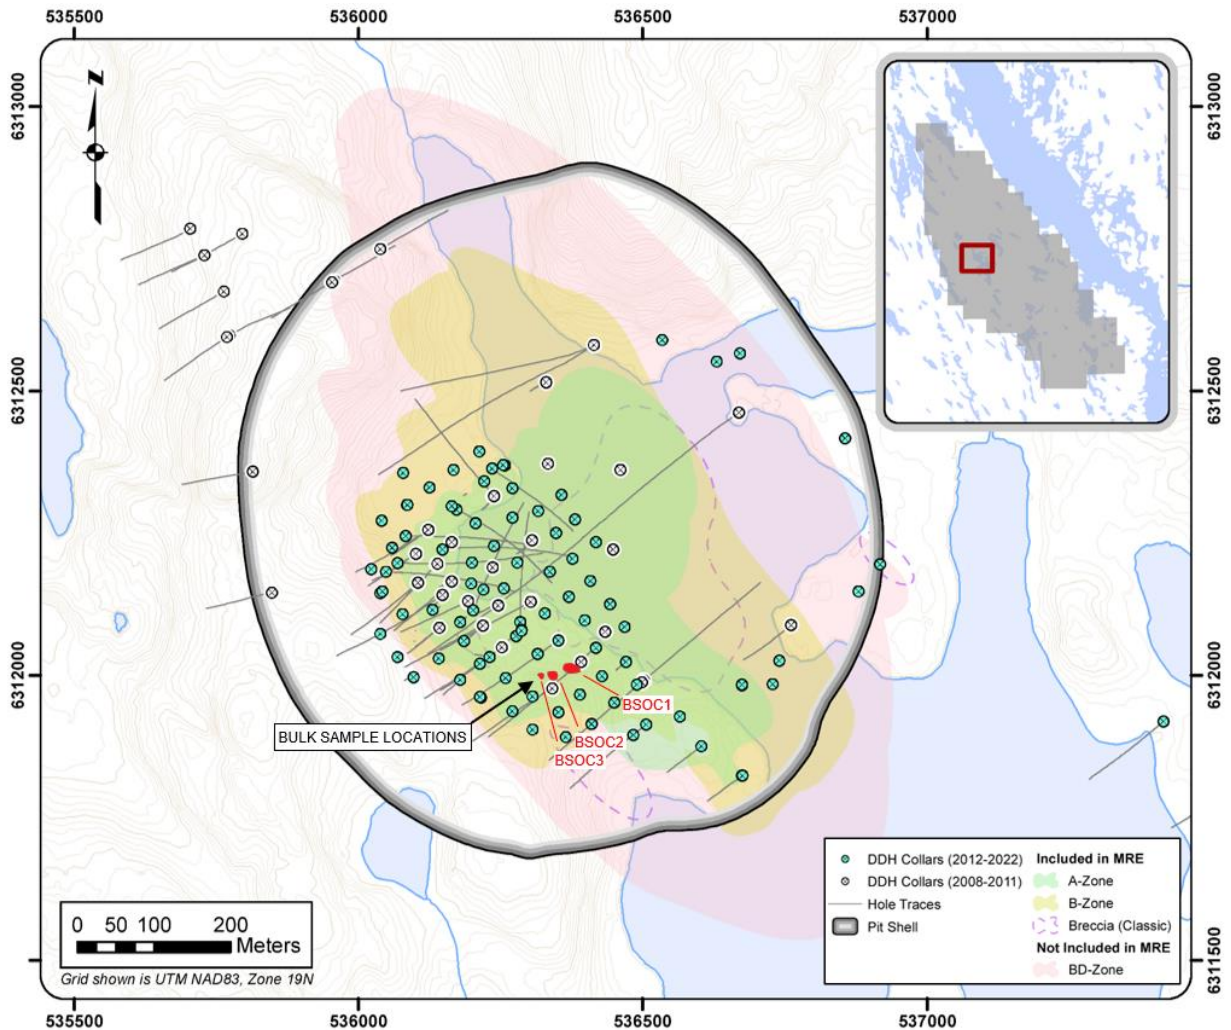


Figure 13-1: Location of bulk samples used for metallurgical testing compared to the MRE pit shell
(Source: Dahrouge/DRA)



13.1.2.1 Chemical Analysis

The bulk sample was assayed by multi-element ICP scan, the chemical analysis is presented in Table 13-1.

Table 13-1: Chemical composition of the bulk sample

Item	Assay (%)	Item	Assay (%)	Item	Assay (%)	Item	Assay (%)
BeO	0.006	K ₂ O	0.09	BaO	0.067	Yb ₂ O ₃	0.0020
C ^{Total}	10.1	CaO	28.6	La ₂ O ₃	0.579	Lu ₂ O ₃	0.0003
CO ₂	34.6	Sc ₂ O ₃	0.0072	Ce ₂ O ₃	0.946	HfO ₂	0.0002
CO ₃	47.2	TiO ₂	0.150	Pr ₂ O ₃	0.094	Ta ₂ O ₅	0.00004
S ^{Total}	0.15	Cr ₂ O ₃	<0.003	Nd ₂ O ₃	0.294	PbO	0.017
SO ₄	0.44	MnO	1.69	Sm ₂ O ₃	0.033	ThO ₂	0.047
S ²⁻	<0.01	Fe ₂ O ₃	11.1	Eu ₂ O ₃	0.0078	U ₃ O ₈	<0.00001
F ⁻	5.72	CuO	0.001	Gd ₂ O ₃	0.0174	TREO	2.0
Na ₂ O	0.03	ZnO	0.137	Tb ₂ O ₃	0.0022	TREO+Y ₂ O ₃	2.0
MgO	12.5	As ₂ O ₃	0.001	Dy ₂ O ₃	0.0105	NdPr/TREO+Y	19.0
Al ₂ O ₃	0.08	Y ₂ O ₃	0.045	Ho ₂ O ₃	0.0015		
SiO ₂	1.67	ZrO ₂	0.006	Er ₂ O ₃	0.0034		
P ₂ O ₅	0.75	Nb ₂ O ₅	0.062	Tm ₂ O ₃	0.0004		

Note:

Where C^{Total} is total carbon content, CO₂ is assayed carbon in carbon dioxide equivalent, CO₃ is assayed carbon in carbonate equivalent, S^{Total} is total sulphur content, SO₄ is sulphur in sulfate equivalent, S²⁻ is sulphur in sulphide form.

13.1.2.2 Mineralogical Characterization

The bulk sample was analyzed with Tescan Integrated Mineral Analyzer (TIMA-X) and the modal mineralogy is presented in Figure 13-2.

The Ashram Deposit is a carbonatite deposit with the main rare earth bearing minerals being monazite and bastnaesite with lesser xenotime. The carbonatite matrix is composed of ferro-dolomite (including ankerite/siderite), fluorite, and lesser apatite. Rare earth mineral grain size is typically less than 30 µm with the majority of monazite grains liberated below 20 µm.



13.1.2.3 Sample Representativity

The bulk sample total rare earth assay (TREO+Y) has been compared to the distribution of mineralized material located within the pit shell developed to constrain mineral resources (excluding waste rock) and is presented in Figure 13-3. The bulk sample composition was found to be approximately 80th percentile for total rare earth content. While this sample does not represent the average grade of the Deposit, this sample can be considered a typical feed sample to the beneficiation plant, especially in the early years of operation as its source was from an outcrop.

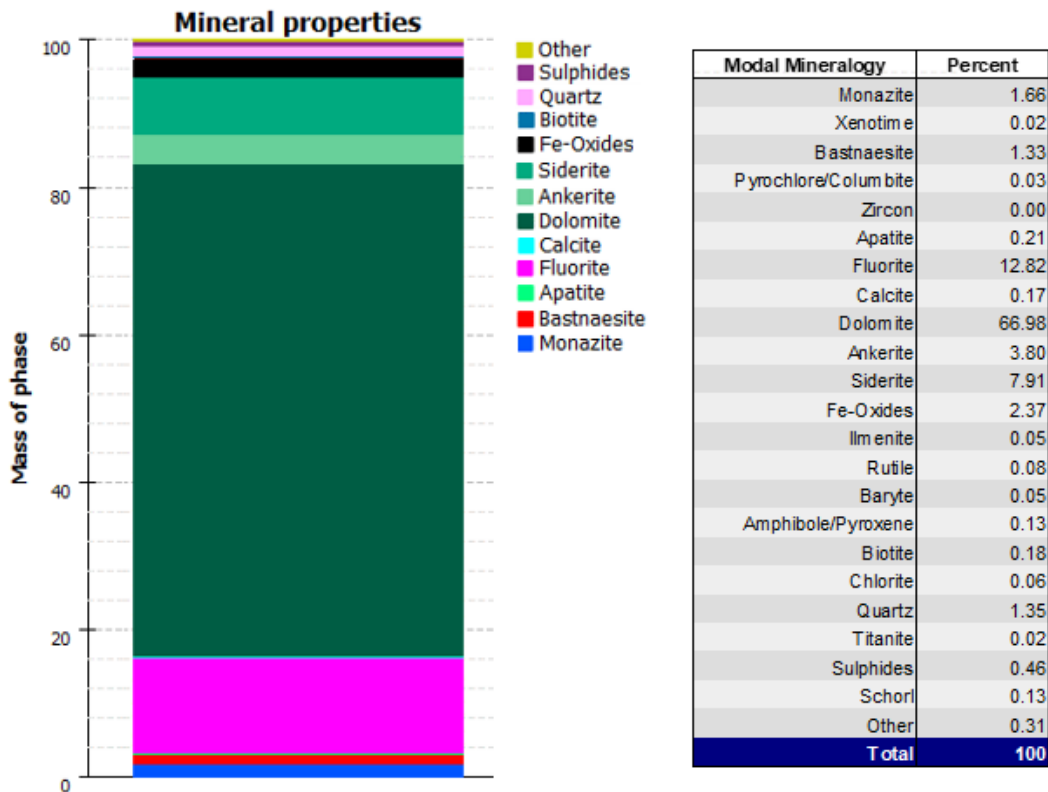


Figure 13-2: Modal mineralogy of the bulk sample used for metallurgical testing
(Source: DRA)

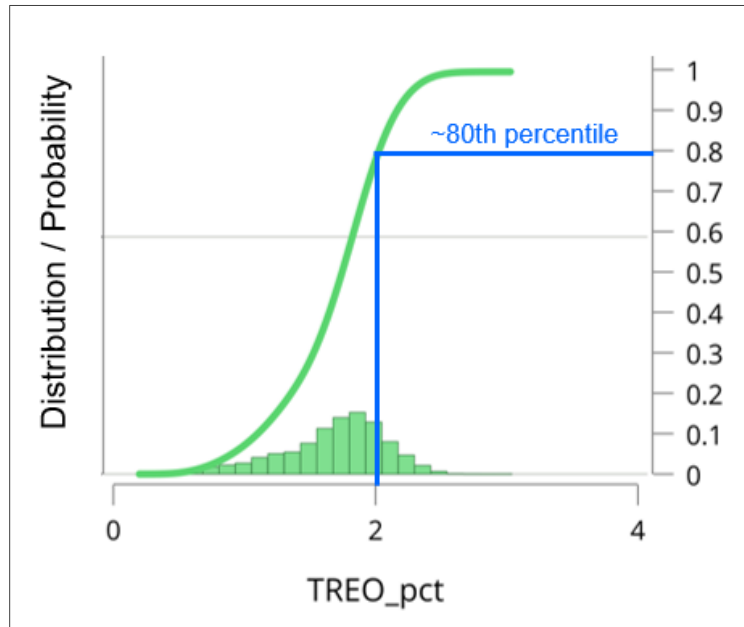


Figure 13-3: Bulk sample TREO assay compared to in-pit distribution
(Source: DRA)

13.1.3 Flotation Testing

The bulk sample used for the flotation development work at SGS was originally received at Hazen in 2015, which had been crushed, screened, and blended to 100% passing 1.7 mm.

Development flotation test work is currently ongoing at SGS. A series bench-scale flotation tests have been performed using a 2 L flotation cell. The feed material was stage-ground from 100% passing 1.7 mm to 80% passing 25 μm . The flotation tests are carried out with 1 kg of ground material conditioned at 50% solids by weight using 10% sodium silicate type-N solution and carboxymethyl cellulose as depressants, Aero6493 as a collector, with pH adjusted to approximately 9.0 using hydrochloric acid. Tests have been performed using one roughing stage and three cleaning stages.

A highlight of the best performing tests is presented in Figure 13-4. As part of the development work, these tests included variations in reagent dosages and scheme and shown repeatability in the grade-recovery curves and thus flotation performance. Most test products were assayed for cerium only and a scale-up factor was applied to estimate TREO grade. The factor used was calibrated against full TREO assays. The selected range of grades and recovery are shown in red. Table 13-2 shows the individual recoveries considered for this MRE and is based on full TREO assays.



Table 13-2: Selected mineral processing recoveries
(Source: DRA)

Element	Recovery	Element	Recovery
La	63.7	Dy	47.1
Ce	63.0	Ho	42.6
Pr	62.0	Er	34.4
Nd	62.1	Tm	30.2
Sm	60.1	Yb	26.7
Eu	58.9	Lu	27.5
Gd	57.5	Y	33.2
Tb	52.1	TREO	62.1

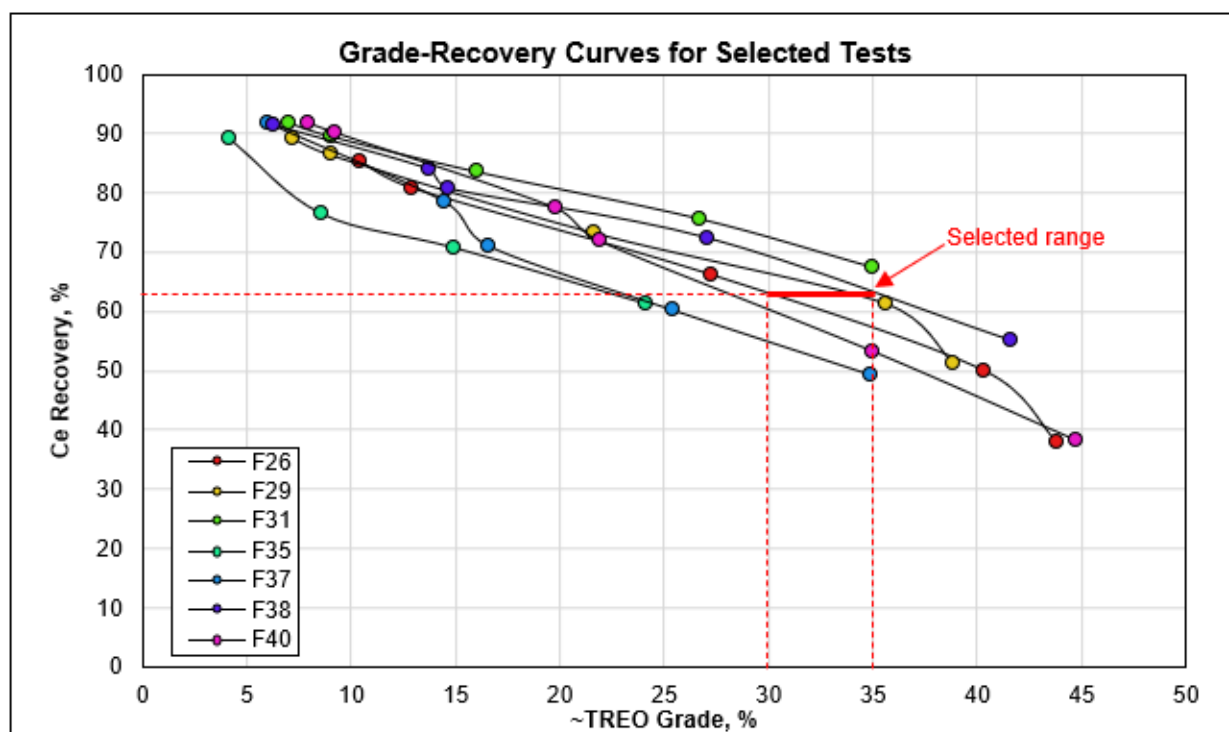


Figure 13-4: Flotation grade-recovery curves from selected tests at SGS
(Source: DRA)



13.2 Hydrometallurgical Test Work

13.2.1 Historical

An initial hydrometallurgical processing flowsheet was developed at the bench-scale by Hazen and achieved the production of commercial grade samples. This flowsheet relied on a multi-step approach to recover the rare earths in a carbonate form. In this flowsheet, the flotation concentrate is leached with a low molarity hydrochloric acid solution (555 kg HCl per ton solids) at 80 °C for 360 minutes to remove easily leachable materials such as carbonates of iron, magnesium and calcium. Powdered iron (8 kg Fe per ton of solids) is added to the reaction to ensure that all the iron in solution remains in solution as iron(II). In this process, the leaching solution reacts with sulphuric acid to regenerate the hydrochloric acid, which is recycled. The HCl leach residue is then processed in a wet high-intensity magnetic separator to recover a crude fluorspar by-product in the non-magnetic fraction and a REE concentrate in the magnetic fraction. The REE concentrate is leached using sulphuric acid (3,970 kg H₂SO₄ per ton of solids) at elevated temperature (220 °C) for 180 minutes to convert all REE to sulphates. The resulting sulphates are dissolved in cold water (1-2 °C) for 120 minutes and any residual solids are sent to tailings. Thorium is then extracted from the leach solution using Primene JMT dissolved in kerosene. The thorium extraction raffinate is sequentially oxidized to convert all the iron to ferric sulphate using hydrogen peroxide (0.36 kg of 50% H₂O₂ per kg of REE in solution), ferric sulphate (0.65 kg of FeSO₄ per kg of REE in solution) is added to bind all the phosphorus and the solution is neutralized to precipitate all the ferric ions using highly reactive magnesium oxide. This series of reactions took 540 minutes to complete during the bench-scale experimentations. Rare earth elements contained in the neutralized solution are then extracted using a commercial extractant EHEHPA diluted in kerosene, and zinc is scrubbed from the REE by controlling the acidity of the scrub acid solution. REEs lost in the scrub liquor are recycled to the extraction stage. REEs are stripped from the organic and the strip liquor is neutralized with sodium carbonate to precipitate the REE as mixed rare earth carbonates product. Recovery of key elements for each step is presented as Table 13-3.

Table 13-3: Recovery of key elements by process stage
(Laroche et al., 2024)

Element	HCl Leach	WHIMS	Acid Bake – Water Leach	pH Neut.
Fe	1.5	45.8	91.3	0.3
Ca	39.1	5.8	15.5	97.4
Mg	0.6	46.7	86.3	-
Mn	0.2	85.4	86.0	99.9
La	79.7	83.2	96.8	82.0
Ce	84.3	82.8	96.9	69.2



Element	HCl Leach	WHIMS	Acid Bake – Water Leach	pH Neut.
Nd/Pr	85.8	85.2	96.9	67.6
SEG	84.5	84.8	95.2	80.9
Tb/Dy	80.4	83.8	89.2	85.8
Y	81.7	66.8	89.0	97.2

Preliminary investigations into the direct leaching of flotation concentrate using concentrated hydrochloric acid solution (12M) followed by REE extraction and purification by diglycolamide extractants were performed by L3 Process Development (L3). While preliminary results were encouraging with leach extractions of 84% for yttrium and 87% for lanthanum, the subsequent investigations using high-grade flotation concentrate produced with the latest iteration of the flotation process at SGS resulted in significantly lower extractions of 58% for yttrium and 68% for lanthanum.

13.2.2 Metallurgical Testing and Results

Sulphuric acid bake and water leach experiments were performed at L3 using flotation concentration supplied by SGS. Selected experiments are presented in Figure 13-5. Acid bake and water leach recoveries were in line with previously reported recoveries by Hazen, although at much lower acid dosages.

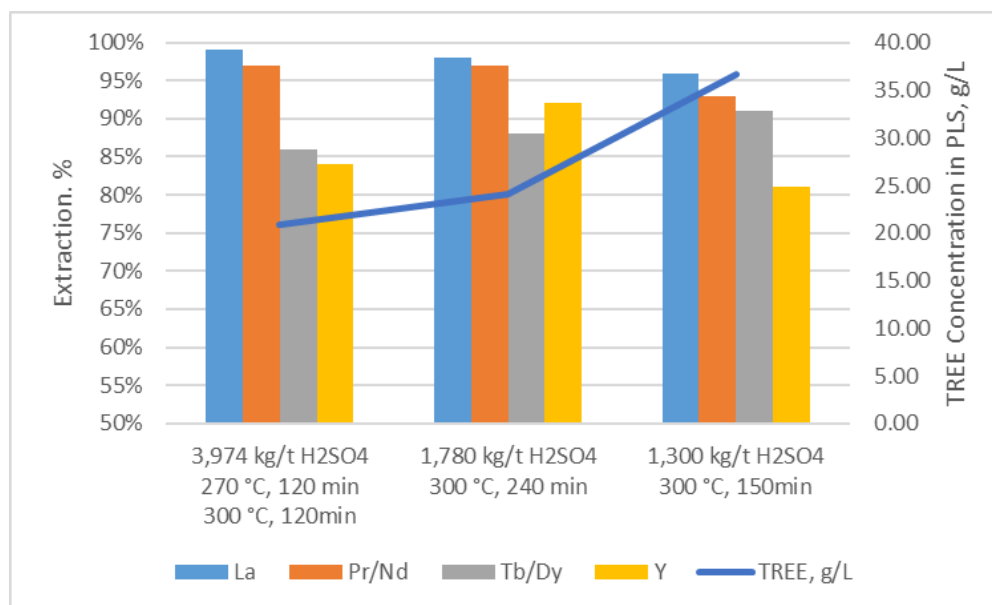


Figure 13-5: Sulphuric acid bake and water leach experiments
(Source: L3 Process Development)



Thorium Extraction

The Ashram Deposit contains a negligible amount of uranium. As such, only thorium removal is required. Cyanex 923, Cyanex 572, and Primene JMT were evaluated as extractants for thorium removal from the water leach solution. It was determined that there was not enough residual acid present to use Primene JMT and that using Cyanex 572 would result in a higher operating cost due to the need to neutralize the PLS and to co-extract the iron. Full extraction of thorium was achieved on water leach solutions with no acidity adjustment using three successive extractions, each with a fresh 30% Cyanex 923 extractant diluted in kerosene at an organic to aqueous ratio of 0.5:1.0. Near complete recovery of the thorium from the organic was achieved using oxalic precipitation directly from the organic.

Direct Oxalate Precipitation

Complete recovery of the REE was achieved using direct oxalic acid precipitation on the thorium free water leach solution. The oxalates were calcined to oxide and analyzed. Mixed rare earth oxide (REO) product samples assays analyzed by WD-XRF (Rigaku ZSX Primus IV) obtained from selected experiments are presented in Table 13-4. It should be noted that these experiments are preliminary in nature and L3 expects an increase in REO purity following the optimization test work scheduled during a later phase of the project.

Table 13-4: Mixed rare earth oxide composition

Solids	(%)	(%)
Al ₂ O ₃	UDL	UDL
Fe ₂ O ₃	0.41	0.15
ZnO	0.14	0.25
La ₂ O ₃	25.72	27.08
CeO ₂	49.09	46.50
Pr ₇ O ₁₁	4.43	5.32
Nd ₂ O ₃	17.41	17.86
SEG ₂ O ₃	1.44	1.36
Tb ₄ O ₇	0.039	0.016
Dy ₂ O ₃	0.19	0.226
Y ₂ O ₃	0.83	0.91
ThO ₂	0.04	UDL



Table 13-5 shows the individual recoveries considered for this MRE and is based on relevant REE assays.

Table 13-5: Selected hydromet processing recoveries
(Source: L3 Process Development)

Element	Recovery
La, Ce, Pr, Nd	95.0
Sm, Eu, Gd	88.0
Tb, Dy, Y	82.0
Ho to Lu	82.0



14. Mineral Resource Estimates

The Mineral Resource Estimate (MRE) for the Ashram Project incorporates data from the 2008 to 2022 Commerce drilling programs. Drill hole information up to December 19, 2023 was considered for this estimate.

Figure 10-1 shows the Ashram Deposit in plan view.

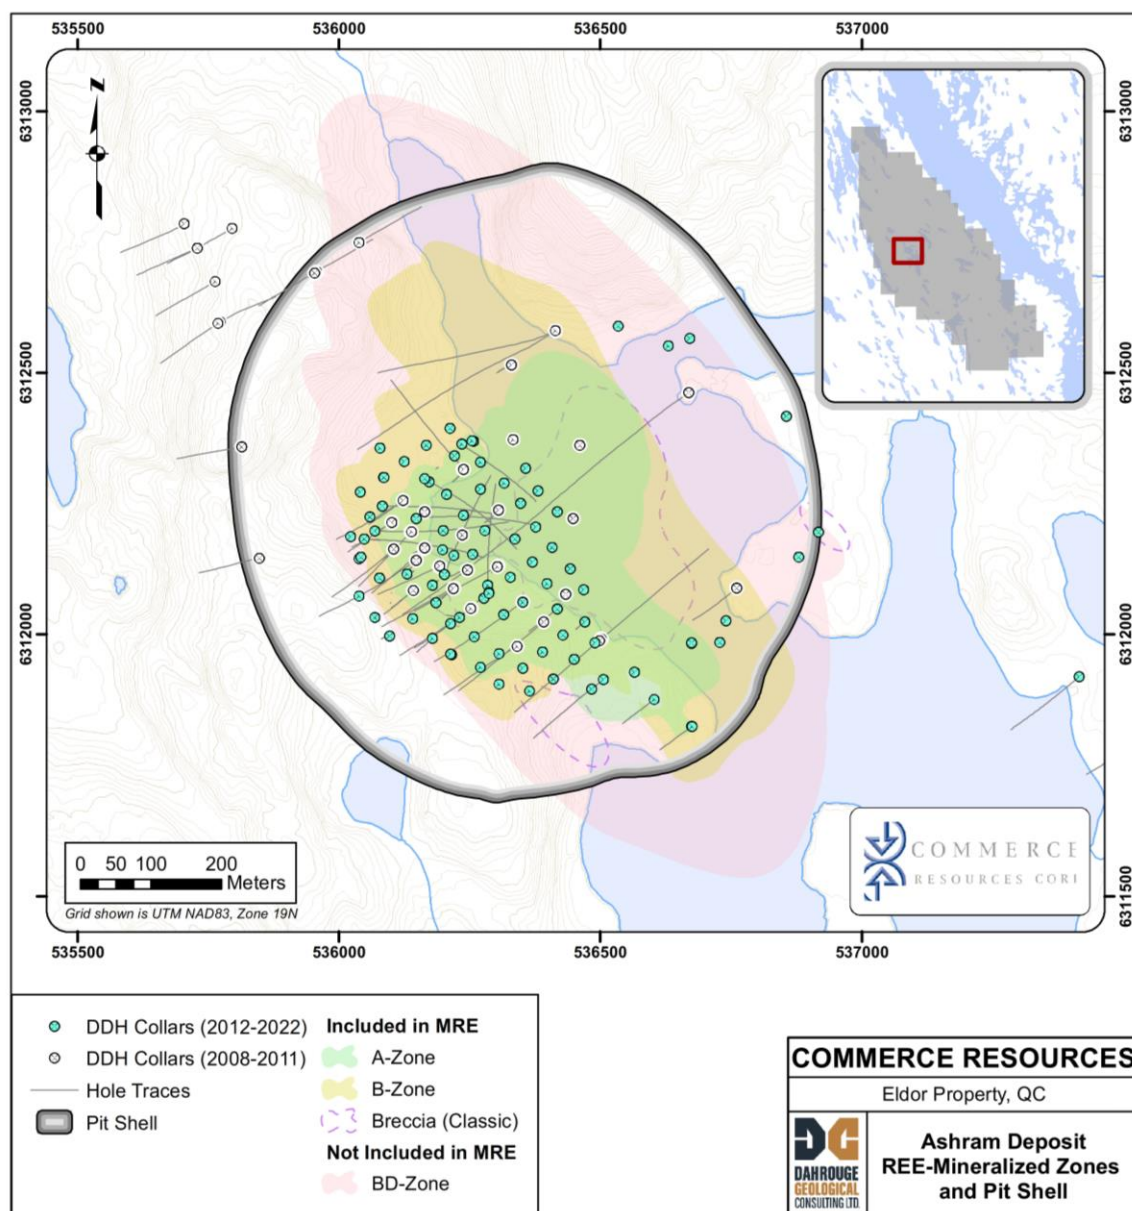


Figure 14-1: Overall plan view for the Ashram Deposit



14.1 Methodology

Leapfrog Geo™ v.2023.2.2 (Leapfrog) was used to model the geological and mineralized zones and to generate the drill hole intercepts for each solid. Leapfrog was used for compositing, 3D block modelling and interpolation. Statistical studies were conducted using Excel and Snowden Supervisor™ v.8.15 (Supervisor).

The methodology used to estimate the mineral resources involved the following steps:

- Database verification;
- 3D modelling of the geological units;
- 3D modelling of the mineralized zones;
- Drill hole intercept and composite generation;
- Basic statistics;
- Capping;
- Geostatistical analysis including variography;
- Block modelling and grade interpolation;
- Block model validation;
- Mineral resource classification;
- Cut-off grade calculation and pit shell optimization;
- Preparation of the mineral resource statement.

14.2 Resource Database

The resource database for the Project as of December 19, 2023 consisted of 213 surface drill holes, six surface channels and 32,962 samples, of which 128 drill holes and a total of 18,496 assays were included in the modelled mineralization.

14.3 Geological Model

Wireframes were constructed by Commerce geologists in Leapfrog Geo™ with only minor modifications made by the QP during his review of the geological model. The model comprises four REE-bearing zones (A-Zone, B-Zone, Breccia Classic, and BD-Zone), as well as three lithological groups (Carbonatites, Metavolcanics, and Lamprophyre). Only three of the REE-bearing zones were interpolated and considered for this MRE, the BD-Zone requiring additional metallurgical studies due to its different REE-bearing mineralogy before being considered for mineral resources (Figure 14-2).

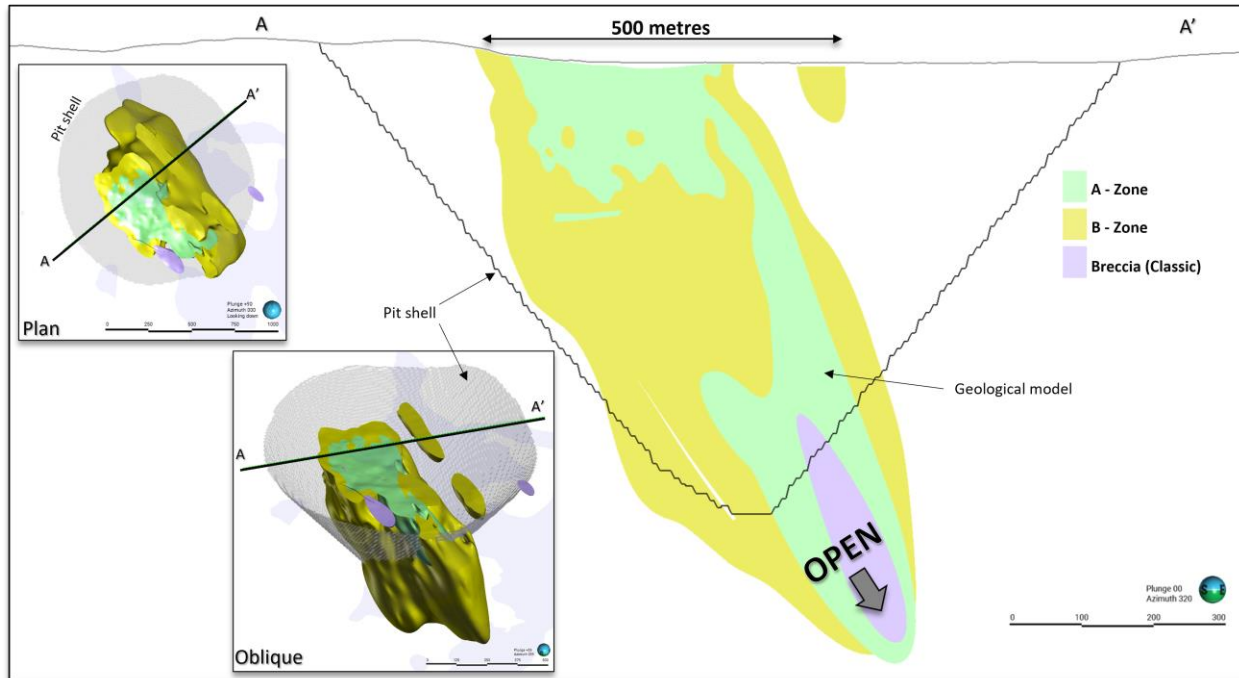


Figure 14-2: Geological model cross-section of the Ashram Deposit highlighting carbonatite lithological domains considered in the MRE

The topographic surface was created in Leapfrog Geo™ and is based on LIDAR and bathymetry surveys. Downhole overburden description from drill holes was used for the creation of the overburden-rock interface. The mineralized zones were clipped to the overburden/bedrock interface when necessary.

14.4 Compositing

All raw assay data intersecting the REE-bearing zones were assigned individual rock codes. These coded intercepts were used to produce basic statistics on sample lengths and grades.

Compositing drill hole samples aimed to homogenize the database for statistical analysis and remove any bias associated with sample lengths that may exist in the original database. The composite length was determined using original sample length statistics and the thickness of the mineralized zones.



In REE-bearing zones, 98.3% of the samples are between 0.5 m and 2 m long. The average sample length is 1.19 m and the median is 1.15 m. Based on these statistics and geological considerations, 13,589 composites were generated with an average length of 2 m, ranging from 1 m to 3 m, after removing outliers and redistributing the tails. Unsampled intervals were set to zero grade during this process.

Figure 14-3 shows the sample length distribution, and Figure 14-4 shows the composite length distribution within the REE-bearing zones.

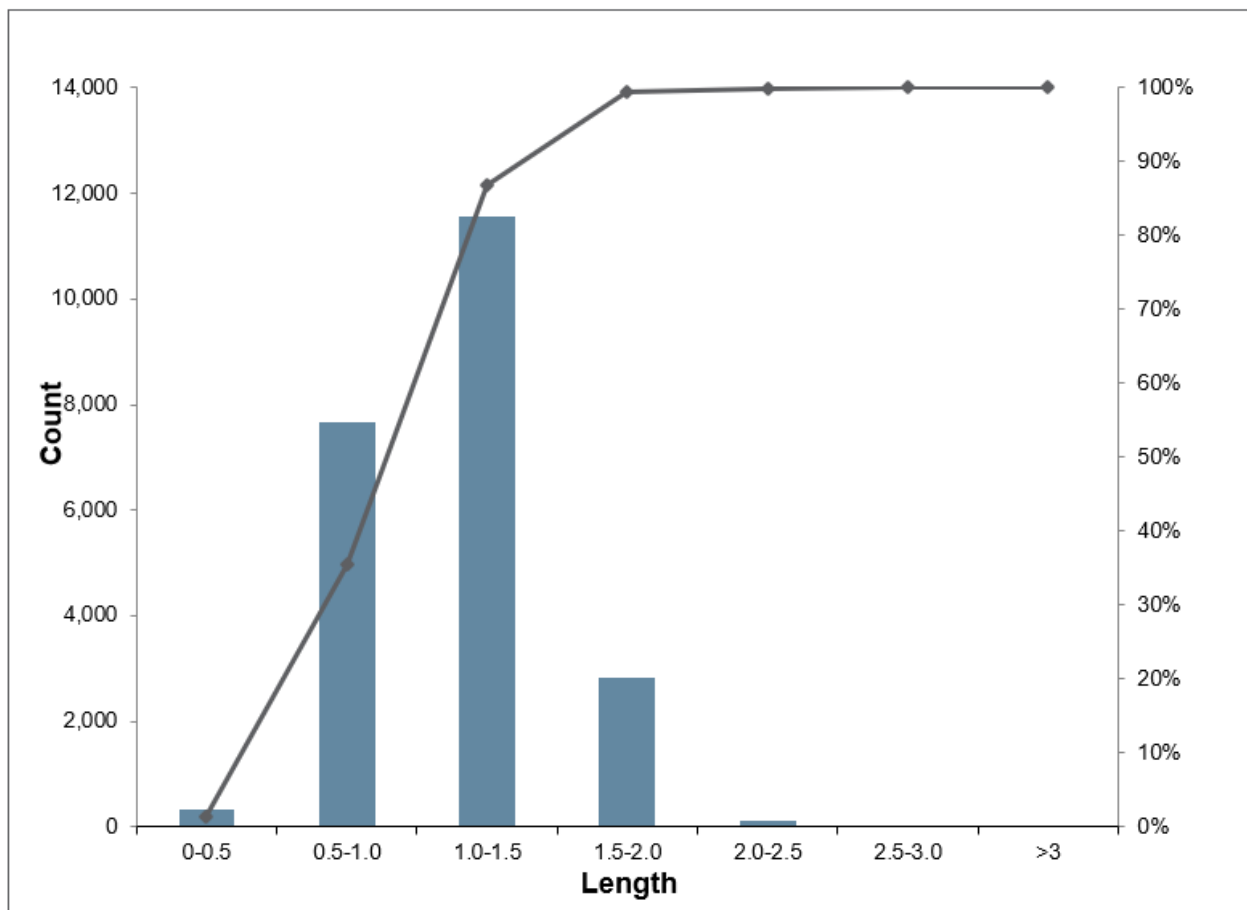


Figure 14-3: Sample length distribution within the REE-bearing zones

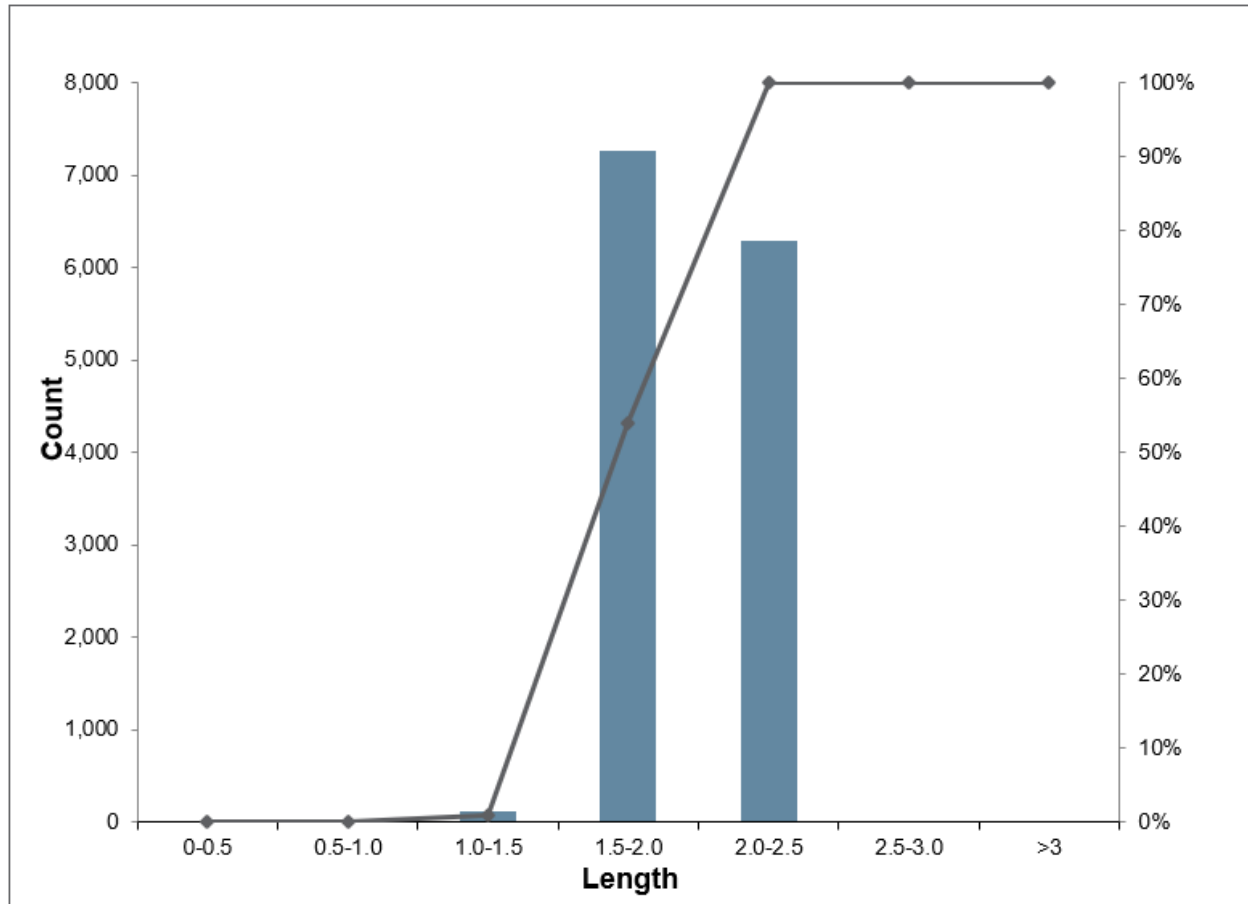


Figure 14-4: Composite length distribution within the REE-bearing zones

14.5 Grade Capping

It is common practice to statistically examine the higher grades within a population and to trim them to a lower-grade value based on the results of a statistical study. Capping is performed on high-grade values considered to be outliers. An outlier is an observation that appears inconsistent with most of the data. High-grade capping was done on the composited assay.

The capping values were defined by checking for abnormal breaks or changes in the slope on the grade distribution probability plot, while making sure that the coefficient of variation of the capped data was ideally lower than 2.00 and no more than 10% of the total contained metal was enclosed within the first 1% of the highest-grade samples. The use of various statistical methods allows for a selection of the capping threshold in a more objective and justified manner.



In the case of the Ashram Deposit, coefficients of variation are low and suggest capping is not necessary; however, the QP analyzed all elements individually and applied capping based on the identification of outliers on distribution probability plots.

Basic statistics for all elements of interest are summarized in Table 14-1 to Table 14-3.

Figure 14-5 to Figure 14-9 show graphs supporting the capping threshold decisions for payable elements in the A-Zone. The QP followed the same approach for all other elements and for the other REE-bearing zones.

Table 14-1: Basic statistics on composites and high-grade capping values for the A-Zone

Element	Composite Count	COV	Max	Min	Uncut Mean	Uncut Median	Capping Value	Number capped	% capped	Metal loss %	Cut COV	Cut mean	Cut median
Sc_ppm	5422	0.25	115.00	0.50	53.36	53.79	100.00	10	0.18	0.03	0.25	53.34	53.79
Y_ppm	5422	0.38	1,412.18	1.00	387.87	365.64	1,300.00	2	0.04	0.01	0.38	387.84	365.70
La_ppm	5422	0.34	8,525.39	0.05	3,573.98	3,583.06	8,000.00	4	0.07	0.01	0.34	3,573.69	3,583.23
Ce_ppm	5422	0.27	16,093.40	0.05	6,788.17	6,863.85	13,000.00	3	0.06	0.02	0.26	6,787.10	6,863.90
Pr_ppm	5422	0.22	1,705.03	0.03	724.19	734.28	1,200.00	5	0.09	0.03	0.21	723.96	734.30
Nd_ppm	5422	0.19	6,008.55	0.05	2,543.58	2,571.50	5,000.00	3	0.06	0.01	0.19	2,543.30	2,571.51
Sm_ppm	5422	0.22	935.90	0.05	362.81	360.98	850.00	1	0.02	-	0.22	362.79	360.99
Eu_ppm	5422	0.27	291.94	0.03	90.06	87.89	250.00	3	0.06	0.01	0.27	90.05	87.90
Gd_ppm	5422	0.31	827.01	0.05	208.27	200.95	800.00	1	0.02	-	0.31	208.27	200.97
Tb_ppm	5422	0.35	101.71	0.05	23.92	22.53	85.00	2	0.04	0.02	0.35	23.92	22.53
Dy_ppm	5422	0.38	448.97	0.05	102.57	95.84	400.00	2	0.04	0.01	0.38	102.56	95.85
Ho_ppm	5422	0.39	58.52	0.05	14.61	13.67	no capping	-	-	-	0.39	14.61	13.67
Er_ppm	5422	0.37	110.01	0.05	31.18	29.50	100.00	2	0.04	0.01	0.37	31.18	29.50
Tm_ppm	5422	0.36	11.69	0.03	3.46	3.30	10.00	3	0.06	0.02	0.36	3.46	3.30
Yb_ppm	5422	0.33	52.62	0.05	18.19	17.48	no capping	-	-	-	0.33	18.19	17.48
Lu_ppm	5422	0.32	6.37	0.02	2.35	2.27	no capping	-	-	-	0.32	2.35	2.27
Nb_ppm	5422	0.54	3,831.60	0.50	515.91	472.06	2,200.00	7	0.13	0.22	0.52	514.78	472.06
F_pc	5422	0.50	19.93	0.01	3.66	3.59	15.00	2	0.04	0.05	0.49	3.65	3.59

Table 14-2: Basic statistics on composites and high-grade capping values for the B-Zone

Element	Composite Count	COV	Max	Min	Uncut Mean	Uncut Median	Capping Value	Number capped	% capped	Metal loss %	Cut COV	Cut mean	Cut median
Sc_ppm	5449	0.33	95.38	0.50	39.28	38.77	no capping	-	-	-	0.33	39.28	38.77
Y_ppm	5449	0.49	1,106.90	1.00	222.93	205.66	800.00	4	0.07	0.04	0.49	222.85	205.66
La_ppm	5449	0.48	17,372.90	0.05	4,048.41	4,163.05	12,500.00	2	0.04	0.04	0.48	4,046.90	4,163.05
Ce_ppm	5449	0.39	34,545.48	0.05	7,134.25	7,529.91	17,500.00	2	0.04	0.05	0.38	7,130.36	7,529.91
Pr_ppm	5449	0.33	3,773.89	0.03	731.65	774.96	1,500.00	3	0.06	0.07	0.33	731.15	774.96
Nd_ppm	5449	0.30	13,225.10	0.05	2,502.89	2,626.84	5,000.00	3	3.00	0.06	0.07	2,501.19	2,626.84
Sm_ppm	5449	0.29	1,435.76	0.05	308.17	316.38	700.00	2	0.04	0.05	0.29	308.03	316.38
Eu_ppm	5449	0.30	308.06	0.03	69.98	71.27	170.00	1	0.02	0.04	0.30	69.95	71.27
Gd_ppm	5449	0.33	451.20	0.05	157.88	159.18	400.00	2	0.04	0.01	0.33	157.86	159.18
Tb_ppm	5449	0.39	55.85	0.05	15.49	15.20	50.00	1	0.02	0.01	0.39	15.49	15.20
Dy_ppm	5449	0.46	284.99	0.05	61.96	59.25	250.00	1	0.02	0.01	0.46	61.95	59.25
Ho_ppm	5449	0.50	44.28	0.05	8.59	7.98	no capping	-	-	-	0.50	8.59	7.98
Er_ppm	5449	0.52	92.52	0.05	18.50	16.95	no capping	-	-	-	0.52	18.50	16.95
Tm_ppm	5449	0.52	9.67	0.03	2.10	1.93	no capping	-	-	-	0.52	2.10	1.93
Yb_ppm	5449	0.49	53.72	0.05	11.47	10.77	45.00	1	0.02	0.01	0.49	11.47	10.77
Lu_ppm	5449	0.48	6.82	0.02	1.54	1.47	no capping	-	-	-	0.48	1.54	1.47
Nb_ppm	5449	0.71	3,076.13	0.50	357.80	302.50	2,000.00	5	0.09	0.12	0.70	357.36	302.50
F_pc	5449	0.87	13.49	0.01	2.05	1.60	no capping	-	-	-	0.87	2.05	1.60



Table 14-3: Basic statistics on composites and high-grade capping values for the Breccia Classic Zone

Element	Composite Count	COV	Max	Min	Uncut Mean	Uncut Median	Capping Value	Number capped	% capped	Metal loss %	Cut COV	Cut mean	Cut median
Sc_ppm	280	0.28	76.00	9.73	38.39	36.30	70.00	2	0.71	0.06	0.28	38.37	36.30
Y_ppm	280	0.53	864.46	49.00	278.07	251.33	800.00	3	1.07	0.13	0.52	277.71	251.59
La_ppm	280	0.49	7,191.53	379.96	2,245.67	1,918.47	6,500.00	1	0.36	0.11	0.48	2,243.20	1,920.48
Ce_ppm	280	0.42	11,536.42	766.01	4,398.06	3,968.53	10,000.00	2	0.71	0.24	0.41	4,387.54	3,976.66
Pr_ppm	280	0.38	1,148.65	83.23	497.56	461.88	1,000.00	4	1.43	0.23	0.37	496.42	462.70
Nd_ppm	280	0.34	3,794.54	304.00	1,815.50	1,750.35	no capping	-	-	-	0.34	1,815.50	1,750.35
Sm_ppm	280	0.32	574.44	46.53	266.46	266.74	500.00	1	0.36	0.10	0.32	266.19	266.79
Eu_ppm	280	0.38	171.75	12.36	65.98	62.93	150.00	2	0.71	0.14	0.37	65.89	62.97
Gd_ppm	280	0.41	415.56	28.62	156.30	147.40	no capping	-	-	-	0.41	156.30	147.40
Tb_ppm	280	0.51	50.22	3.87	17.58	15.96	no capping	-	-	-	0.51	17.58	15.96
Dy_ppm	280	0.53	222.11	14.99	75.68	69.80	200.00	2	0.71	0.13	0.53	75.58	69.81
Ho_ppm	280	0.54	37.54	1.76	10.84	9.91	30.00	3	1.07	0.29	0.53	10.81	9.96
Er_ppm	280	0.53	79.86	3.70	23.33	22.06	no capping	-	-	-	0.53	23.33	22.06
Tm_ppm	280	0.51	8.51	0.45	2.63	2.48	no capping	-	-	-	0.51	2.63	2.48
Yb_ppm	280	0.48	44.83	3.12	14.15	13.29	no capping	-	-	-	0.48	14.15	13.29
Lu_ppm	280	0.47	6.09	0.42	1.89	1.79	no capping	-	-	-	0.47	1.89	1.79
Nb_ppm	280	0.59	1,706.94	51.85	650.18	677.71	1,500.00	1	0.36	0.11	0.58	649.44	680.13
F_pc	280	1.18	6.49	0.15	0.96	0.46	5.00	3	1.07	0.93	1.15	0.95	0.46

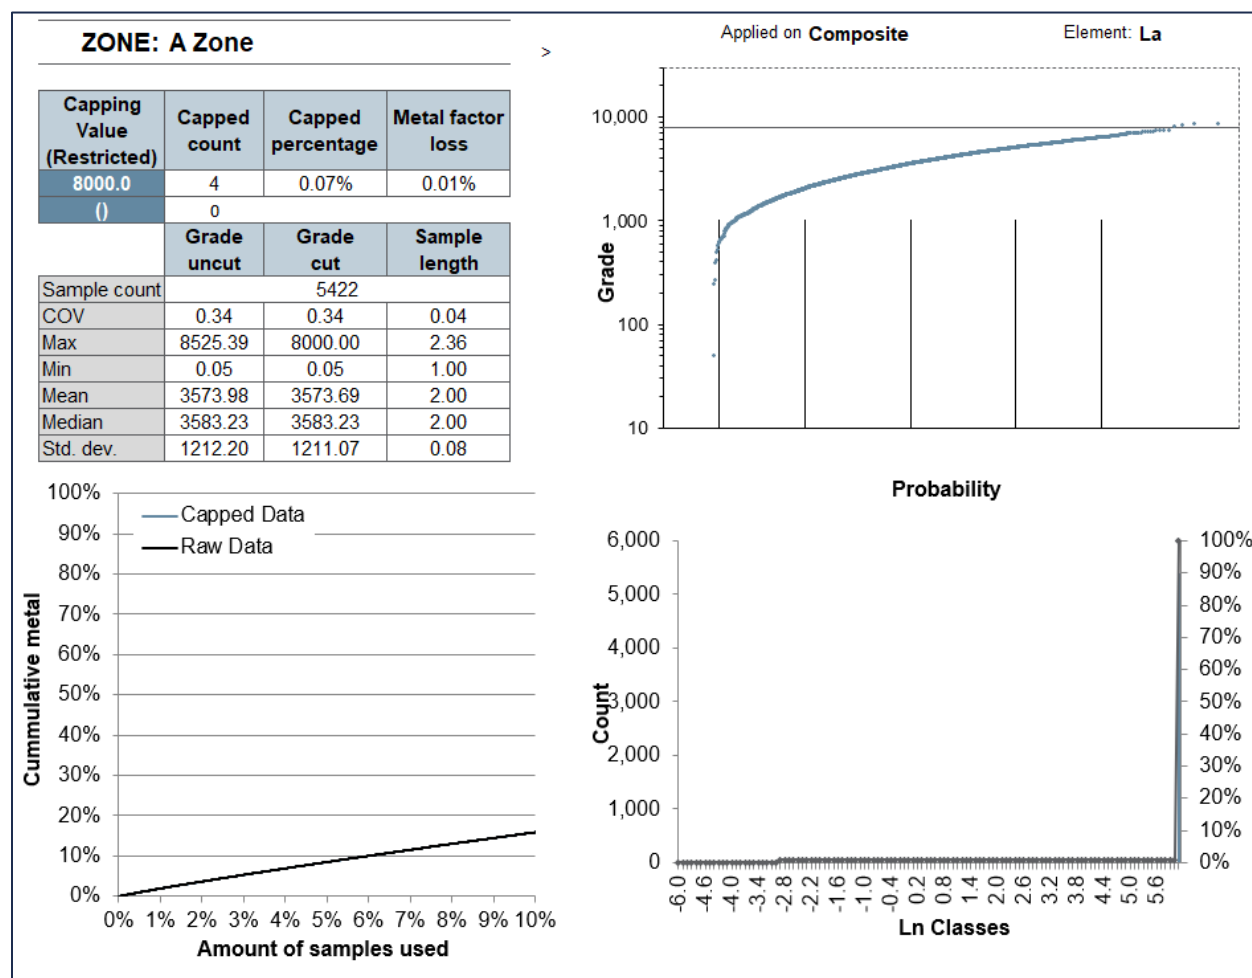


Figure 14-5: Graphs supporting capping in the A-Zone for La

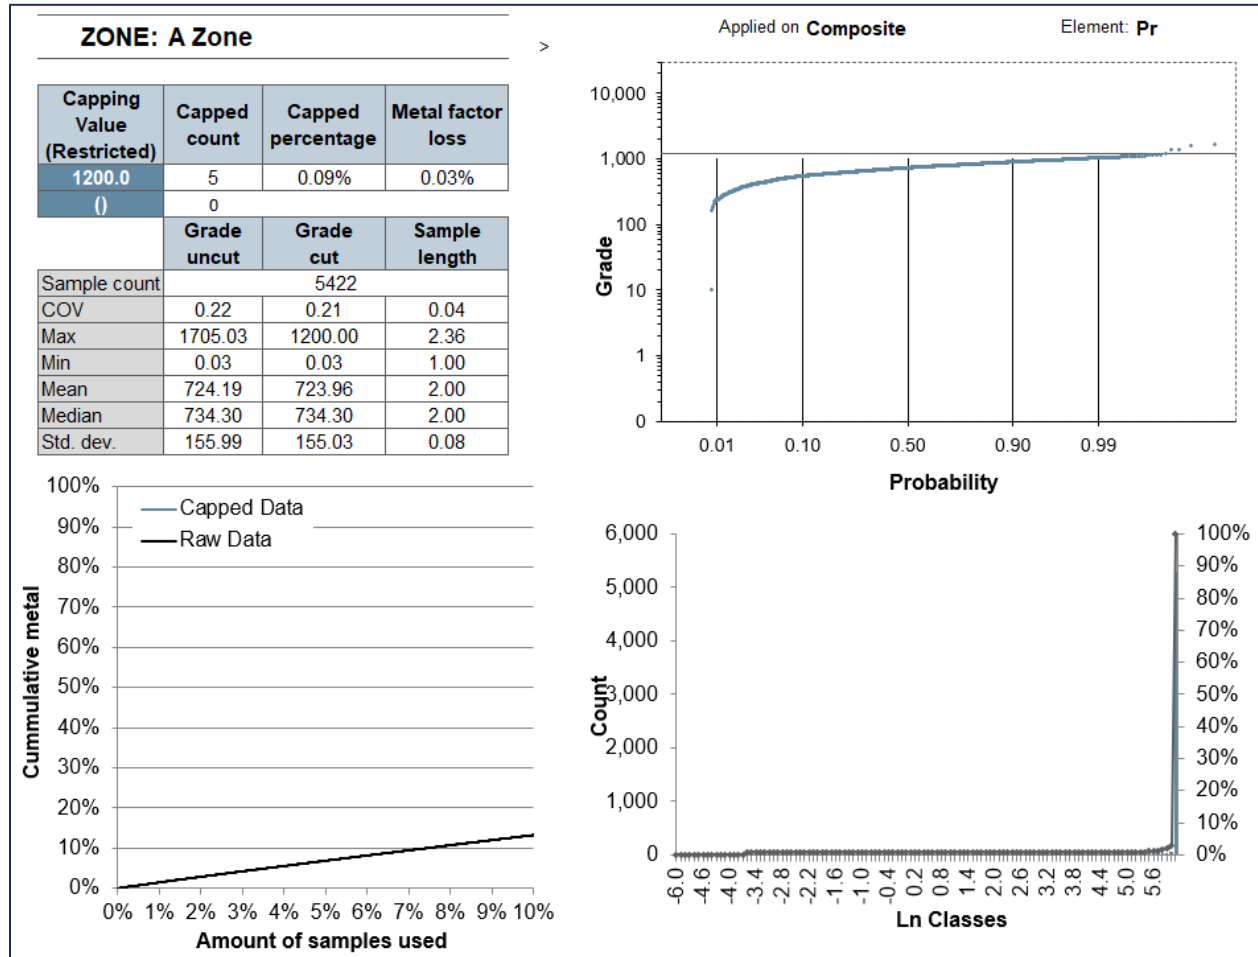


Figure 14-6: Graphs supporting capping in the A-Zone for Pr

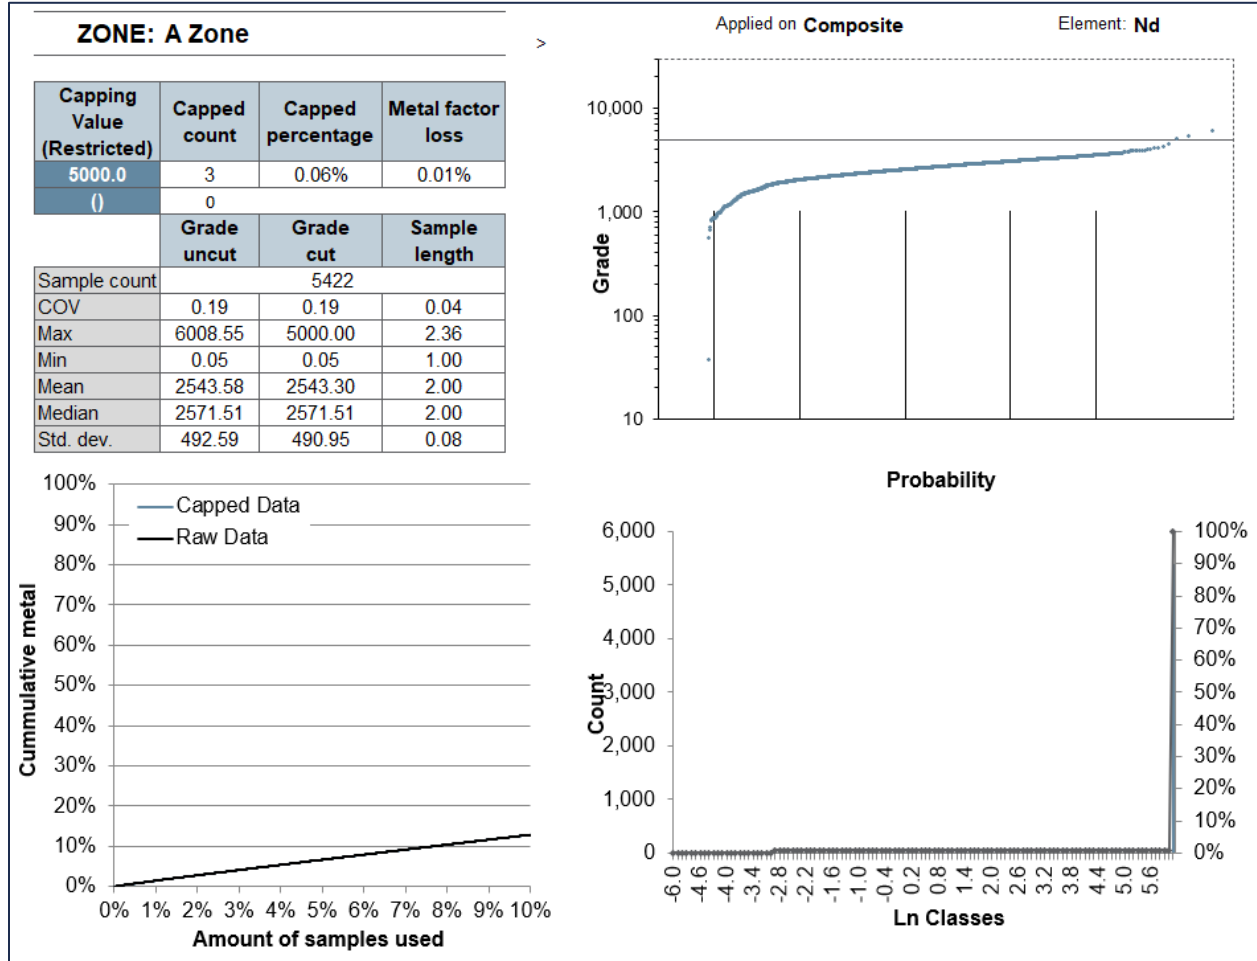


Figure 14-7: Graphs supporting capping in the A-Zone for Nd

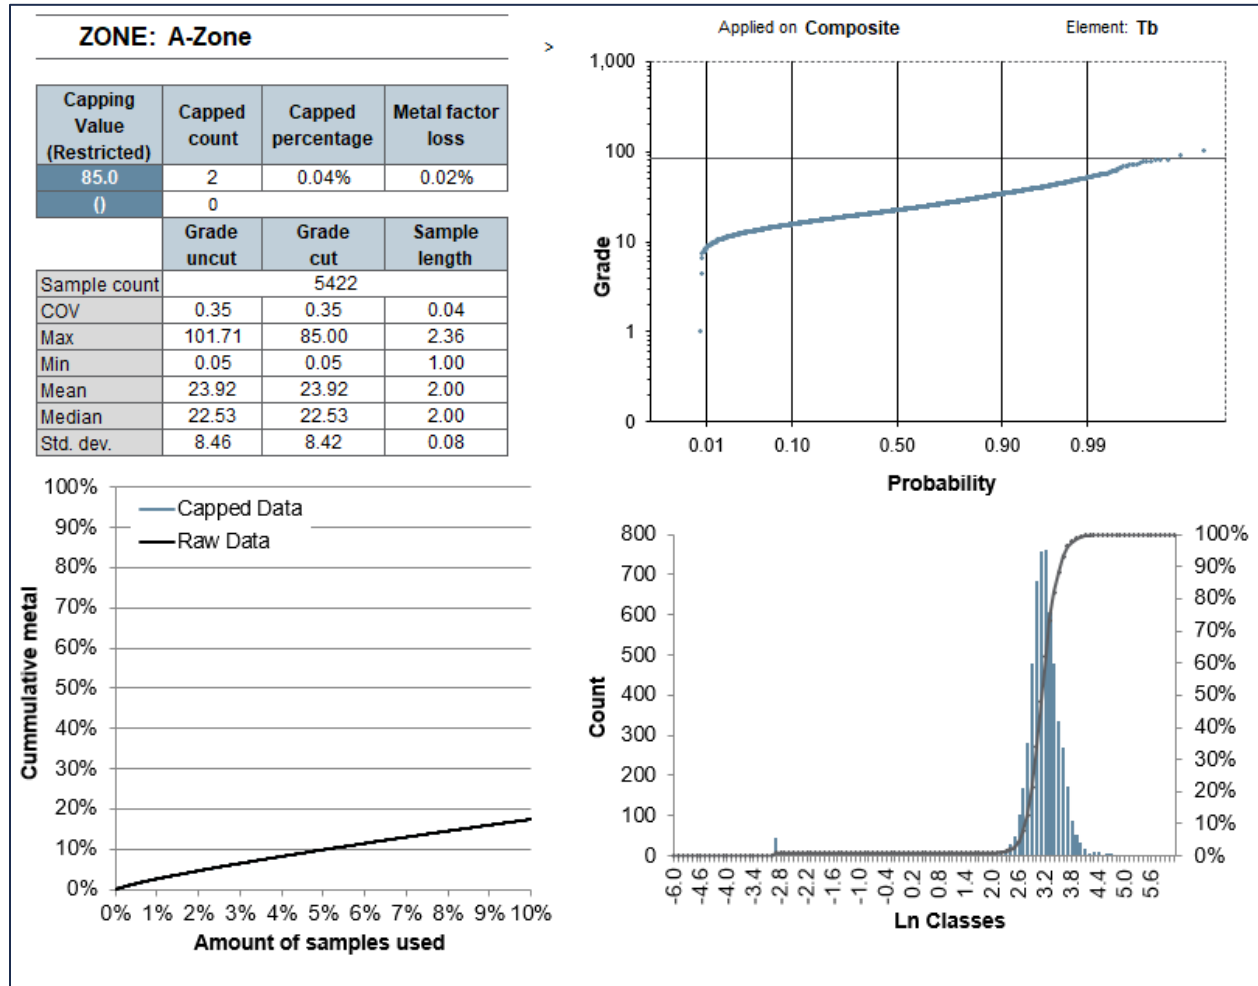


Figure 14-8: Graphs supporting capping in the A-Zone for Tb

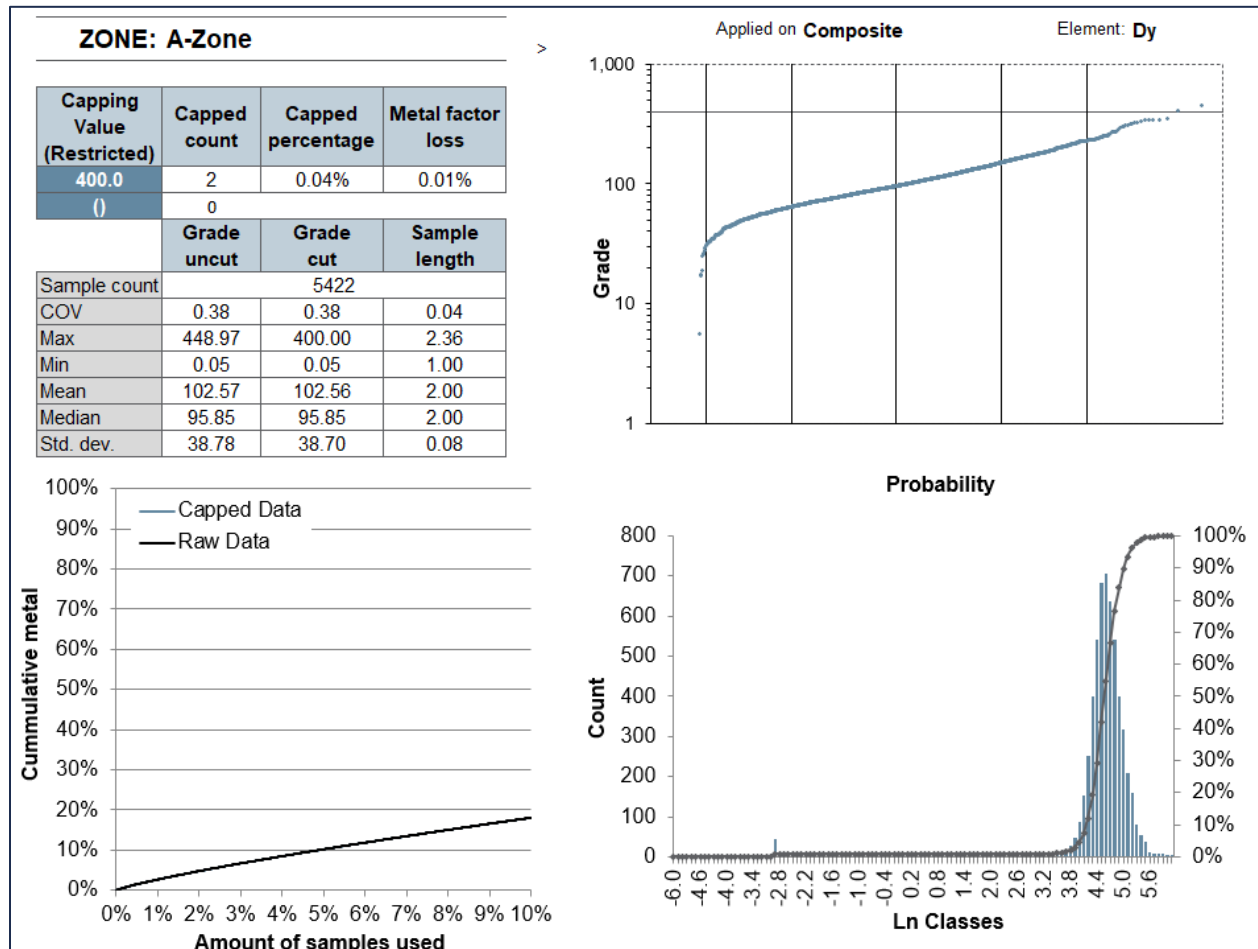


Figure 14-9: Graphs supporting capping in the A-Zone for Dy

14.6 Density

Bulk density is an important parameter to calculate tonnages for the estimated volumes derived from the block model.

Density measurements were collected on the Project by previous operators and, more recently, by Commerce. A total of 4,919 measurements are within the geological model used for the MRE. The samples span all the different lithologies and mineralized domains, except for one non-material metasediment unit.

The number and distribution of density measures made available are sufficient for density to be interpolated for the REE-bearing zones. Fixed density values were assigned to lithological units, corresponding to the median density value of each unit.



Table 14-4 shows the basic statistics for the density database. The method of assigning densities to the block model is identified in the last column of this table. A fixed density of 2.00 g/cm³ was assigned to the overburden.

Table 14-4: Density basic statistics

Wireframe	Count	Minimum	Maximum	Mean	Median	COV	Selected
A-Zone	1,527	2.24	3.99	3.08	3.07	0.05	Interpolated
B-Zone	1,654	2.00	3.93	2.99	2.99	0.04	Interpolated
BD-Zone	781	2.42	3.88	2.93	2.92	0.04	Interpolated
Breccia (Classic)	89	2.73	3.73	3.05	3.03	0.05	Interpolated
Lamprophyre	21	2.73	3.15	2.95	2.97	0.04	2.97
Calcite Carbonatite	127	2.58	3.50	2.87	2.85	0.04	2.85
Carbonatite Grouped	294	2.57	3.51	2.89	2.88	0.04	2.88
Dolomite Calcite Carb Group	305	2.76	3.80	2.96	2.95	0.03	2.95
Metavolcanic 2 (MV_2)	9	2.75	2.92	2.84	2.84	0.02	2.84
Metavolcanic 3 (MV_3)	8	2.62	3.11	2.74	2.68	0.05	2.68
Metasediment 1 (MS_1)	-	-	-	-	-	-	2.90
Metasediment 2 (MS_2)	104	2.76	3.15	2.90	2.90	0.02	2.90

14.7 Variogram Analysis

A semi-variogram is a common tool used to measure the spatial variability within a zone. Typically, samples taken far apart will vary more than samples taken close to each other. A variogram gives a measure of how much two samples taken from the same mineralized zone will vary in grade depending on the distance between those samples, allowing search ellipsoids to be built for interpolation purposes.

Three-dimensional (3D) directional variography was carried out on the composites using the Snowden Supervisor™ software. Variograms were modelled in the three orthogonal directions to define a 3D ellipsoid for the mineralized zone. The three directions of ellipsoid axes were set by using the variogram fans and visually confirmed using the geological knowledge of the deposit.



Then, a mathematical model was interpreted to best fit the shape of the calculated variogram for each direction. Three components were defined for the mathematical model: the nugget effect, the sill, and the range. In all cases where a Normal Score Transformation was used, the results were back-transformed before using them to define the ellipsoids and interpolation parameters.

A single variogram per element was modelled, but due to the strong similarity between the variography results and to the type of deposit, it was decided to use the direction and ranges modelled for payable element Pr for all light REEs and to use the direction and ranges modelled for payable element Dy for all heavy REEs. A unique variogram was used for each of the remaining elements.

Table 14-5 presents the variogram model parameters from Supervisor for each element of the A-Zone, while Table 14-6 presents the variogram model parameters used for the MRE. Figure 14-10 to Figure 14-14 show the variography results for the A-Zone for payable elements.

Due to the shape of the deposit being concentric, no realistic continuity could be modelled for the B-Zone and BD-Zone in the geostatistical analysis because of the gap in the center of the data left by the A-Zone. Therefore, the A-Zone parameters were used for the three different zones. As for the Breccia Zone, it did not have enough pairs to perform a conclusive variography study; consequently, the same parameters as the A-Zone were used. It must be noted that the Breccia Zone follows the same orientation as the A-Zone.

**Table 14-5: Variogram model parameters obtained from the variography study
for each element in the A-Zone**

Element	Nugget	First structure				Second structure				Leapfrog orientation (ZXZ)		
		Sill	Range X (m)	Range Y (m)	Range Z (m)	Sill	Range X (m)	Range Y (m)	Range Z (m)	Dip Azimuth	Dip	Pitch
Sc	0.124	0.520	25	25	30	0.356	250	150	200	50	40	80
Y	0.130	0.510	20	30	25	0.359	150	100	100	50	40	80
La	0.100	0.560	30	25	30	0.340	150	125	100	50	40	80
Ce	0.103	0.511	20	30	20	0.386	175	125	150	50	40	80
Pr	0.109	0.506	30	25	30	0.385	200	150	150	50	40	80
Nd	0.117	0.433	15	25	30	0.450	150	150	150	50	40	80
Sm	0.113	0.565	15	20	30	0.322	225	150	50	50	40	80
Eu	0.114	0.587	20	20	30	0.299	250	150	150	50	40	80
Gd	0.114	0.655	20	20	30	0.231	250	150	150	50	40	80
Tb	0.135	0.635	20	20	40	0.230	200	150	150	50	40	80
Dy	0.133	0.654	25	20	40	0.213	200	150	150	50	40	80
Ho	0.131	0.692	25	25	30	0.177	200	150	150	50	40	80
Er	0.129	0.681	25	25	30	0.190	200	150	150	50	40	80
Tm	0.127	0.594	15	25	25	0.280	150	100	100	50	40	80
Yb	0.126	0.534	20	15	25	0.340	150	125	100	50	40	80
Lu	0.126	0.631	25	25	30	0.243	150	150	100	50	40	80
Nb	0.109	0.714	20	25	25	0.177	50	60	60	50	40	80
F	0.102	0.730	15	20	25	0.168	150	100	50	50	40	80

Table 14-6: Variogram model parameters used for the MRE for each element in the A-Zone

Element	Nugget	First structure				Second structure				Leapfrog orientation (ZXZ)		
		Sill	Range X (m)	Range Y (m)	Range Z (m)	Sill	Range X (m)	Range Y (m)	Range Z (m)	Dip Azimuth	Dip	Pitch
Sc	0.133	0.654	25	20	40	0.213	200	150	150	50	40	80
Y	0.133	0.654	25	20	40	0.213	200	150	150	50	40	80
La	0.109	0.506	30	25	30	0.385	200	150	150	50	40	80
Ce	0.109	0.506	30	25	30	0.385	200	150	150	50	40	80
Pr	0.109	0.506	30	25	30	0.385	200	150	150	50	40	80
Nd	0.109	0.506	30	25	30	0.385	200	150	150	50	40	80
Sm	0.109	0.506	30	25	30	0.385	200	150	150	50	40	80
Eu	0.109	0.506	30	25	30	0.385	200	150	150	50	40	80
Gd	0.109	0.506	30	25	30	0.385	200	150	150	50	40	80
Tb	0.133	0.654	25	20	40	0.213	200	150	150	50	40	80
Dy	0.133	0.654	25	20	40	0.213	200	150	150	50	40	80
Ho	0.133	0.654	25	20	40	0.213	200	150	150	50	40	80
Er	0.133	0.654	25	20	40	0.213	200	150	150	50	40	80
Tm	0.133	0.654	25	20	40	0.213	200	150	150	50	40	80
Yb	0.133	0.654	25	20	40	0.213	200	150	150	50	40	80
Lu	0.133	0.654	25	20	40	0.213	200	150	150	50	40	80
Nb	0.109	0.714	20	25	25	0.177	50	60	60	50	40	80
F	0.102	0.730	15	20	25	0.168	150	100	50	50	40	80

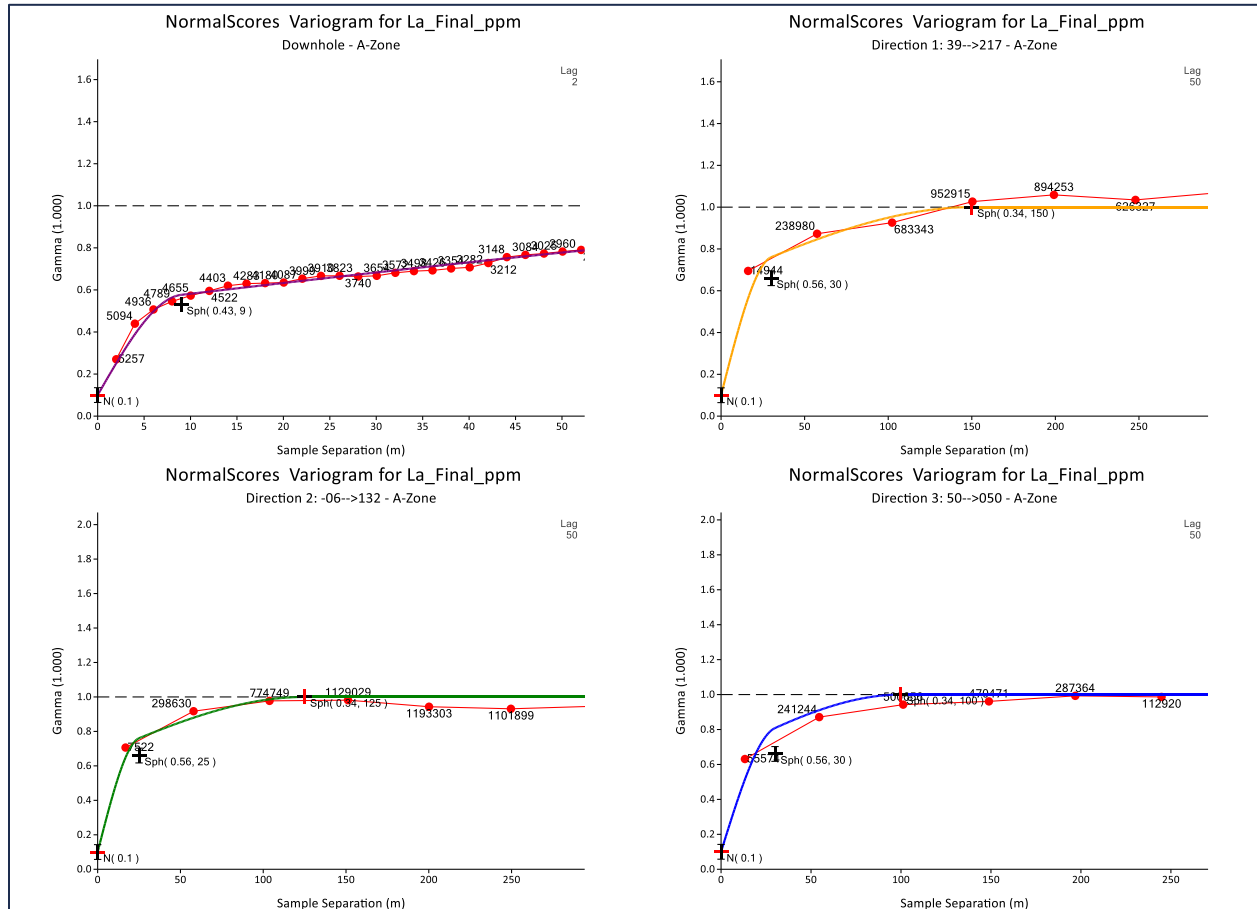


Figure 14-10: Variograms for La (ppm) for the A-Zone

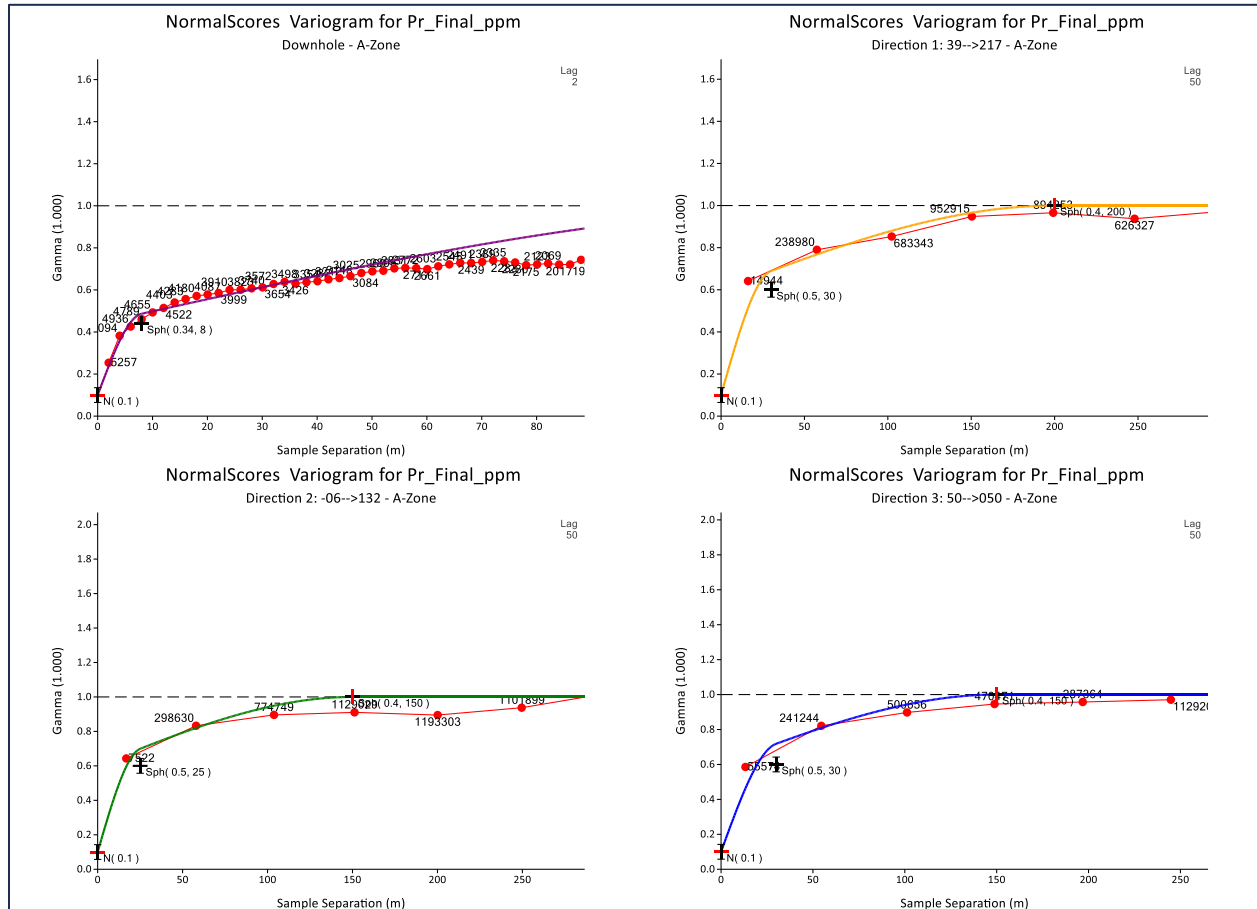


Figure 14-11: Variograms for Pr (ppm) for the A-Zone

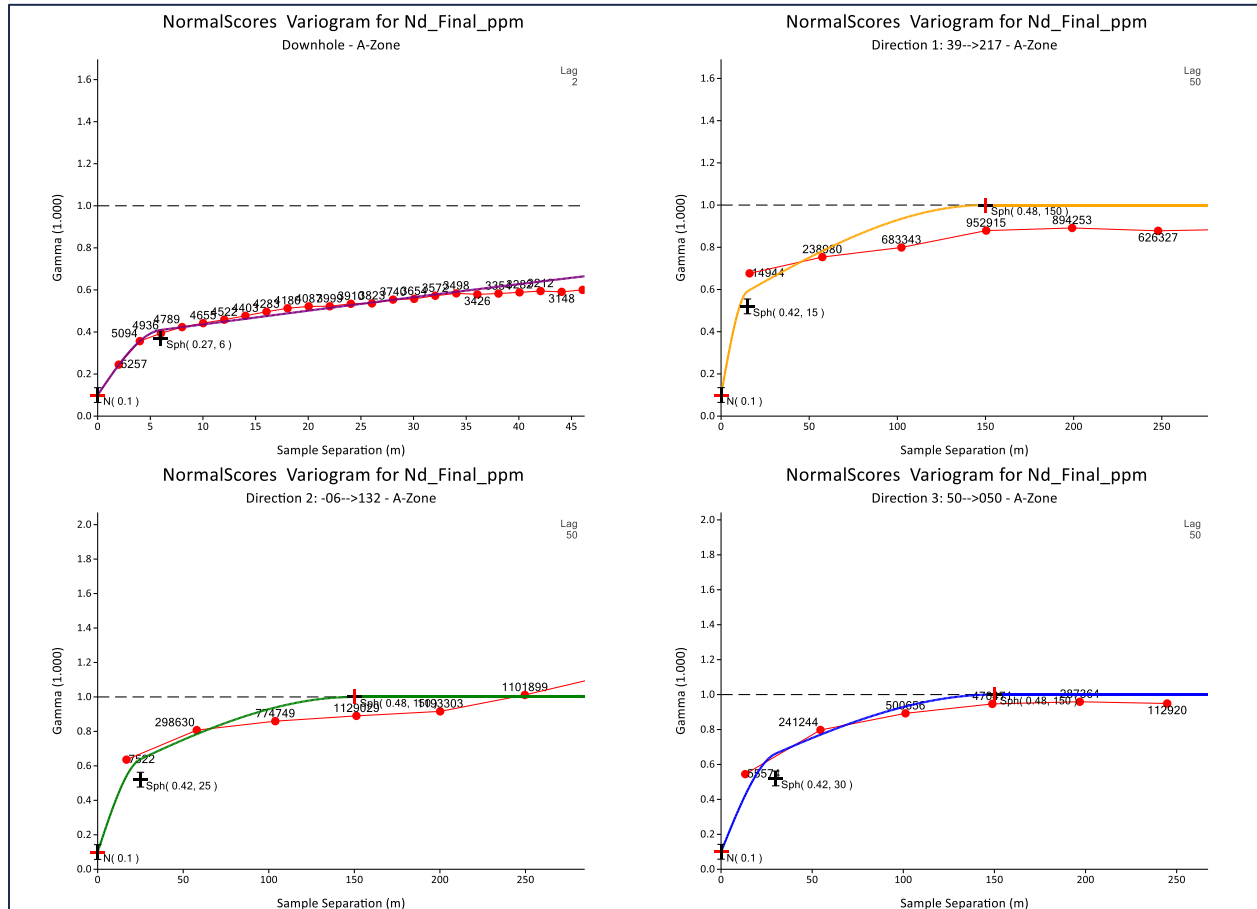


Figure 14-12: Variograms for Nd (ppm) for the A-Zone

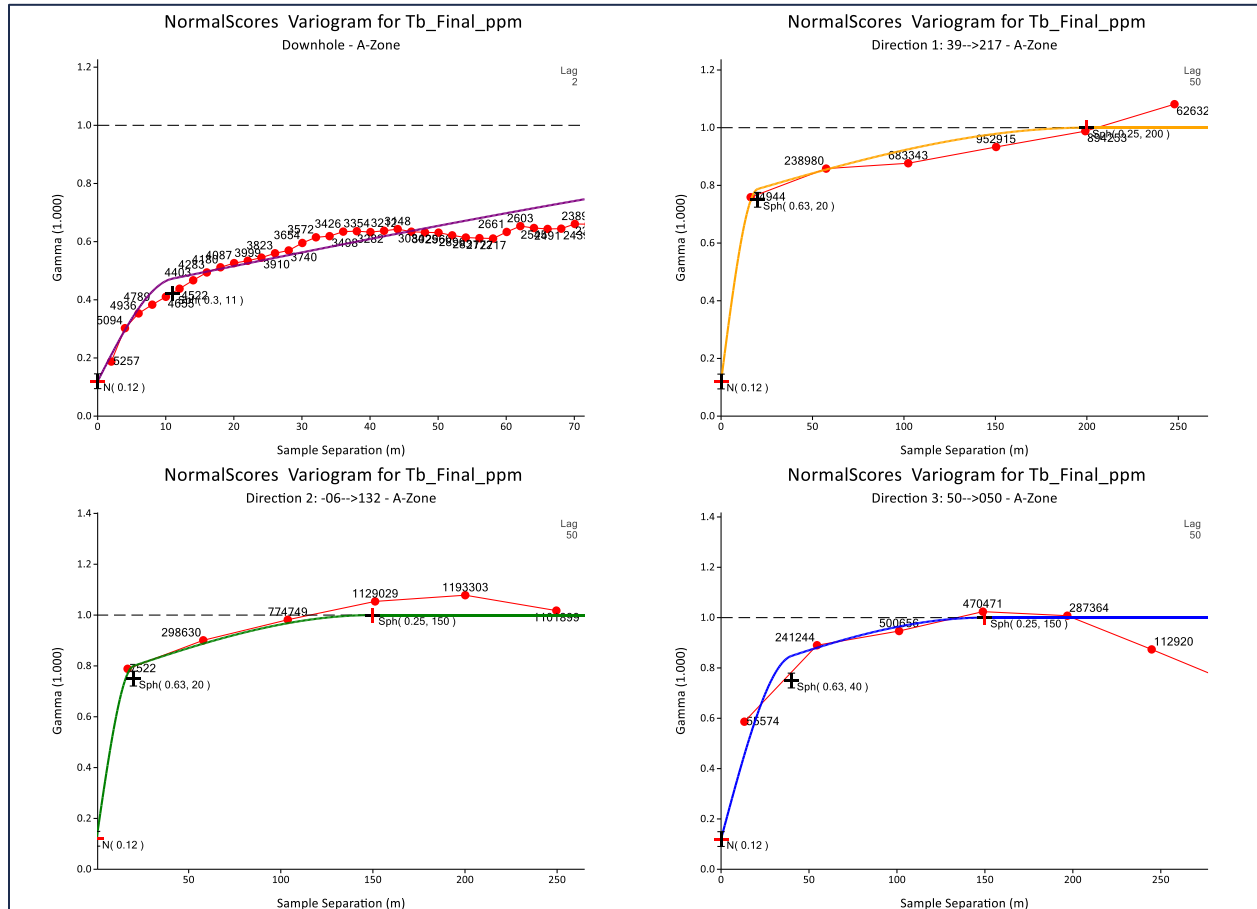


Figure 14-13: Variograms for Tb (ppm) for the A-Zone

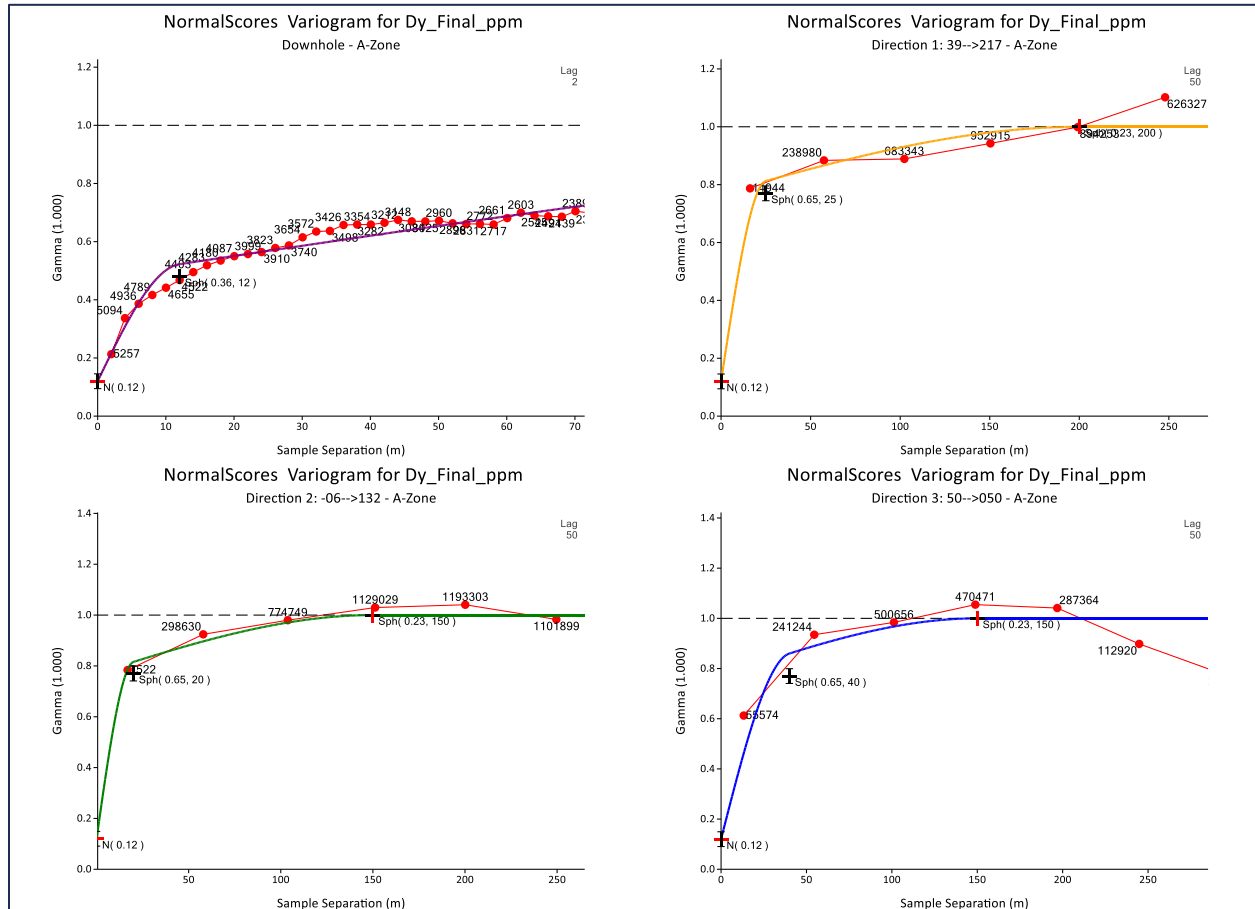


Figure 14-14: Variograms for Dy (ppm) for the A-Zone

14.8 Block Model

The block model was constructed in Leapfrog for the current MRE using the block model parameters provided in Table 14-7. Individual block cells have dimensions of 5 m long (X-axis) by 5 m wide (Y-axis) by 5 m vertical (Z-axis). The size of the blocks was chosen to best match the drilling pattern, thickness of the zones, complexity of the geological model, and plausible future mining methods. The block size was discussed with engineers working on the Project.

The block model was coded using the octree sub-block method typical of Edge™, reflecting the proportion of each solid inside every block. All blocks falling within a solid were assigned the corresponding solid block code.



Table 14-7: Block model parameters

Properties	X (column)	Y (row)	Z (level)
Origin Coordinates	536,260	6,310,890	340
Number of Blocks	409	395	205
Block Size (m)	5	5	5
Sub-block Size (down to)	1.25	1.25	1.25
Rotation (degree)	320		

14.9 Search Ellipsoid Strategy

The range and orientation of the ellipsoids used for interpolation were established using the variography study. Other interpolation parameters are derived from combining kriging neighbourhood analyses and the QP's professional experience.

Based on geostatistical analysis and general geological knowledge of the Project, the ranges of the ellipsoids correspond to the range of the second structure of the variogram study conclusions (Table 14-6) for the first pass and to 1.5 times the second structure of the variogram study conclusions for the second pass.

Table 14-8 to Table 14-10 show the search ellipsoids parameters by interpolation passes for the main elements.



Table 14-8: Search ellipsoids parameters for the A-Zone

Element	Ellipsoid Orientation			First Pass			Second Pass		
	Dip Azimut	Dip	Pitch	Range X (m)	Range Y (m)	Range Z (m)	Range X (m)	Range Y (m)	Range Z (m)
Sc	40	50	80	200	150	150	300	225	225
Y	40	50	80	200	150	150	300	225	225
La	40	50	80	200	150	150	300	225	225
Ce	40	50	80	200	150	150	300	225	225
Pr	40	50	80	200	150	150	300	225	225
Nd	40	50	80	200	150	150	300	225	225
Sm	40	50	80	200	150	150	300	225	225
Eu	40	50	80	200	150	150	300	225	225
Gd	40	50	80	200	150	150	300	225	225
Tb	40	50	80	200	150	150	300	225	225
Dy	40	50	80	200	150	150	300	225	225
Ho	40	50	80	200	150	150	300	225	225
Er	40	50	80	200	150	150	300	225	225
Tm	40	50	80	200	150	150	300	225	225
Yb	40	50	80	200	150	150	300	225	225
Lu	40	50	80	200	150	150	300	225	225
Nb	40	50	80	150	100	50	225	150	75
F	40	50	80	150	100	50	225	150	75

Table 14-9: Search ellipsoids parameters for the A-Zone

Element	Ellipsoid Orientation			First Pass			Second Pass		
	Dip Azimut	Dip	Pitch	Range X (m)	Range Y (m)	Range Z (m)	Range X (m)	Range Y (m)	Range Z (m)
Sc	40	50	80	200	150	150	300	225	225
Y	40	50	80	200	150	150	300	225	225
La	40	50	80	200	150	150	300	225	225
Ce	40	50	80	200	150	150	300	225	225
Pr	40	50	80	200	150	150	300	225	225
Nd	40	50	80	200	150	150	300	225	225
Sm	40	50	80	200	150	150	300	225	225
Eu	40	50	80	200	150	150	300	225	225
Gd	40	50	80	200	150	150	300	225	225
Tb	40	50	80	200	150	150	300	225	225
Dy	40	50	80	200	150	150	300	225	225
Ho	40	50	80	200	150	150	300	225	225
Er	40	50	80	200	150	150	300	225	225
Tm	40	50	80	200	150	150	300	225	225
Yb	40	50	80	200	150	150	300	225	225
Lu	40	50	80	200	150	150	300	225	225
Nb	40	50	80	150	100	50	225	150	75
F	40	50	80	150	100	50	225	150	75



Table 14-10: Search ellipsoids parameters for the A-Zone

Element	Ellipsoid Orientation			First Pass			Second Pass		
	Dip Azimut	Dip	Pitch	Range X (m)	Range Y (m)	Range Z (m)	Range X (m)	Range Y (m)	Range Z (m)
Sc	40	50	80	200	150	150	300	225	225
Y	40	50	80	200	150	150	300	225	225
La	40	50	80	200	150	150	300	225	225
Ce	40	50	80	200	150	150	300	225	225
Pr	40	50	80	200	150	150	300	225	225
Nd	40	50	80	200	150	150	300	225	225
Sm	40	50	80	200	150	150	300	225	225
Eu	40	50	80	200	150	150	300	225	225
Gd	40	50	80	200	150	150	300	225	225
Tb	40	50	80	200	150	150	300	225	225
Dy	40	50	80	200	150	150	300	225	225
Ho	40	50	80	200	150	150	300	225	225
Er	40	50	80	200	150	150	300	225	225
Tm	40	50	80	200	150	150	300	225	225
Yb	40	50	80	200	150	150	300	225	225
Lu	40	50	80	200	150	150	300	225	225
Nb	40	50	80	150	100	50	225	150	75
F	40	50	80	150	100	50	225	150	75

It should be mentioned that the classification was mostly based on geological confidence, grade continuity, and drill hole spacing. For this reason, some interpolated blocks could not be classified as either Inferred or Indicated. Refer to Section 14.13 Mineral Resource Classification for more details.

14.10 Interpolation Method

The interpolation was run on a set of points extracted from the capped composited data. The block model grades were estimated using the ordinary kriging (OK) method. Hard boundaries were applied between the mineralized zones individually and between surrounding country rocks to prevent grades from adjacent lithologies from being used during interpolation. As a block was estimated, it was tagged with the corresponding pass number, slope of the regression value, kriging efficiency, number of composites used, number of drill holes used, and drill spacing.

For comparison purposes, additional grade models were generated using inverse distance squared (ID²) and nearest neighbour (NN).



14.11 Interpolation Parameters

A kriging neighbourhood analysis (KNA) was conducted on the mineralized zone with Snowden Supervisor™ software. KNA provides a quantitative method of testing different estimation parameters (i.e., block size, discretization and min/max of composites used for the interpolation) by evaluating their impact on the quality of the results. This analysis helps select the optimal value for each parameter.

Following this study, the parameters provided in Table 14-11 were chosen for the interpolation of the block model. Although the interpolation parameters are largely inspired by the KNA study, they may differ slightly to accommodate certain interpolation needs, such as having a minimum number of drill holes or avoiding unwanted smearing effects. The same interpolation parameters were used for all three zones (A-Zone, B-Zone, Breccia Classic).

Table 14-11: Interpolation parameters

Element	First Pass			Second Pass		
	Min Composite	Max Composite	Max Composite per DDH	Min Composite	Max Composite	Max Composite per DDH
Sc	5	15	4	5	15	Not Limited
Y	5	15	4	5	15	Not Limited
La	5	15	4	5	15	Not Limited
Ce	5	15	4	5	15	Not Limited
Pr	5	15	4	5	15	Not Limited
Nd	5	15	4	5	15	Not Limited
Sm	5	15	4	5	15	Not Limited
Eu	5	15	4	5	15	Not Limited
Gd	5	15	4	5	15	Not Limited
Tb	5	15	4	5	15	Not Limited
Dy	5	15	4	5	15	Not Limited
Ho	5	15	4	5	15	Not Limited
Er	5	15	4	5	15	Not Limited
Tm	5	15	4	5	15	Not Limited
Yb	5	15	4	5	15	Not Limited
Lu	5	15	4	5	15	Not Limited
Nb	5	15	4	5	15	Not Limited
F	5	15	4	5	15	Not Limited



14.12 Block Model Validation

The block model was validated using several methods, including statistical analyses and a visual review of the grades in the associated drill hole.

Block model grades were visually compared against drill hole composite grades and raw assays in cross-section, plan, longitudinal, and 3D views. This visual validation process also confirmed that the proper coding was done within the various domains.

The visual comparison shows a good correlation between the values without excessive smoothing. Visual comparisons were also conducted between OK, ID², and NN interpolation scenarios.

The OK scenario used for the mineral resource estimate produced a grade distribution honouring drill hole data and the style of mineralization observed at the Ashram Deposit. It is the QP's opinion that the Ashram block model provides a reasonable estimate of in situ mineral resources.

14.13 Mineral Resource Classification

The mineral resources were classified according to the CIM Definition Standards for Mineral Resources & Mineral Reserves published by the Canadian Institute of Mining, Metallurgy and Petroleum (CIM Definition Standards).

14.13.1 Mineral Resource Definition

The CIM Definition Standards clarify the following:

- **Inferred Mineral Resource:**

"An Inferred Mineral Resource is that part of a Mineral Resource for which quantity and grade or quality are estimated on the basis of limited geological evidence and sampling. Geological evidence is sufficient to imply but not verify geological and grade or quality continuity.

An Inferred Mineral Resource has a lower level of confidence than that applying to an Indicated Mineral Resource and must not be converted to a Mineral Reserve. It is reasonably expected that the majority of Inferred Mineral Resources could be upgraded to Indicated Mineral Resources with continued exploration."



- **Indicated Mineral Resource:**

"An Indicated Mineral Resource is that part of a Mineral Resource for which quantity, grade or quality, densities, shape and physical characteristics are estimated with sufficient confidence to allow the application of Modifying Factors in sufficient detail to support mine planning and evaluation of the economic viability of the deposit.

Geological evidence is derived from adequately detailed and reliable exploration, sampling and testing and is sufficient to assume geological and grade or quality continuity between points of observation.

An Indicated Mineral Resource has a lower level of confidence than that applying to a Measured Mineral Resource and may only be converted to a Probable Mineral Reserve. "

- **Measured Mineral Resource:**

"A Measured Mineral Resource is that part of a Mineral Resource for which quantity, grade or quality, densities, shape, and physical characteristics are estimated with confidence sufficient to allow the application of Modifying Factors to support detailed mine planning and final evaluation of the economic viability of the deposit.

Geological evidence is derived from detailed and reliable exploration, sampling and testing and is sufficient to confirm geological and grade or quality continuity between points of observation.

A Measured Mineral Resource has a higher level of confidence than that applying to either an Indicated Mineral Resource or an Inferred Mineral Resource. It may be converted to a Proven Mineral Reserve or to a Probable Mineral Reserve."

14.13.2 Ashram Mineral Resource Definition

The estimated block grades were classified as either Inferred or Indicated using the drill spacing, geological continuity of mineralization, grade continuity, and overall confidence level. No Measured Mineral Resources were defined for this phase of the Project.

Inferred Mineral Resources were defined for blocks within the A-Zone, B-Zone, and Breccia Classic zones with a drill spacing of 200 m or better.

Indicated Mineral Resources were defined where the following criteria were met:

- Drill spacing of 70 m or less (most of the Indicated Resource is 50 m or less);
- Demonstrated geological continuity;
- Grade continuity at the reported cut-off grade.



When needed, a series of clipping boundaries were created manually to either upgrade or downgrade classification to avoid issues caused by automatically generated classification. All remaining estimated but unclassified blocks were not reported.

14.14 Pit Optimization and Cut-off Value

According to CIM's Definition Standards, for a deposit to be considered a Mineral Resource it must be proven that there are reasonable prospects for eventual economic extraction (RPEEE). This requirement implies that the quantity and grade estimates meet certain economic thresholds and that the Mineral Resources are reported at an appropriate cut-off grade that considers extraction scenarios and processing recoveries. To determine the quantity of mineralization that shows a RPEEE using open pit mining methods, BBA carried out a pit optimization analysis using Hexagon's MinePlan Economic Planner. This analysis evaluates the profitability of each mineralized block in the model based on its value and generates a pit shell that considers appropriate pit slope angles.

It is important to note that the results from the pit optimization exercise are used solely for testing the RPEEE by open pit mining methods and do not represent an economic study.

Table 14-12: presents the input parameters that were used to calculate the cut-off value and to generate the pit shell. The selling prices for the five payable oxides are based on the 3-year annualized average pricing (2021, 2022 and 2023), which was sourced from Adamas Intelligence's Rare Earth Pricing Quarterly Outlook (Q1 2024). An exchange rate of 1.30 CAD to USD was considered. The operating costs have been established using a combination of comparable projects and industry benchmarks and are therefore conceptual in nature. An overall pit slope of 52 degrees was considered based on previous geotechnical studies. The pit optimization did not consider any mining dilution or mining losses. All costs presented in the table are in Canadian Dollars (\$) and the prices are in US Dollars (USD).



Table 14-12: Pit optimization parameters

Parameter	Unit	Value
Production Rate (Concentrator Feed)	t/d	6,000
Mill Recovery (Concentrator + Hydromet)		
La ₂ O ₃	%	60.5
Pr ₂ O ₃	%	58.9
Nd ₂ O ₃	%	59.0
Tb ₂ O ₃	%	42.7
Dy ₂ O ₃	%	38.6
Metal Selling Price		
La ₂ O ₃	USD/kg	1.25
Pr ₂ O ₃ - NdPr Oxide	USD/kg	95
Nd ₂ O ₃ -NdPr Oxide	USD/kg	95
Tb ₂ O ₃	USD/kg	1,500
Dy ₂ O ₃ (2N5)	USD/kg	375
Operating Costs		
Mining	\$/t mined	8
Incremental Mining Cost (per 10 m bench)	\$/t mined	0.02
Variable Processing - Concentrator	\$/t milled	60
Variable Processing - Hydromet Plant	\$/t Mx-REO product	3,000
Variable Processing - Separation Plant	\$/t product	7,700
Transportation Cost to Separation Plant	\$/t Mx-REO product	200
General & Administration	M\$/y	25
Fixed Processing – Concentrator	M\$/y	10
Fixed Processing – Hydromet Plant	M\$/y	11
Fixed Processing – Separation	M\$/y	10
Total Fixed Costs	\$/t milled	25.57



Table 14-13 presents the metallurgical recoveries that were considered for the non-payables. These recoveries are required to calculate the mixed-REO tonnages that will be produced at the concentrator and sent to the hydromet plant. The mixed-REO tonnage is required since the operating costs for the hydromet plant are presented on a dollar per tonne (\$/t) processed basis.

Table 14-13: Metallurgical recovery of non-payables

Oxide	Value
Ce ₂ O ₃	59.8%
Sm ₂ O ₃	52.9%
Eu ₂ O ₃	51.8%
Gd ₂ O ₃	50.6%
Ho ₂ O ₃	34.9%
Er ₂ O ₃	28.3%
Tm ₂ O ₃	24.8%
Yb ₂ O ₃	21.9%
Lu ₂ O ₃	22.6%
Y ₂ O ₃	27.2%
Ce ₂ O ₃	59.8%
Sm ₂ O ₃	52.9%

The following formulas have been used to calculate the economics of each block in the model:

- **Mx-REO Product (kg)** = Block Volume (m³) x Block Density (t/m³) x [La₂O₃ (ppm) x La₂O₃ Recovery (%) + Pr₂O₃ (ppm) x Pr₂O₃ Recovery (%) ...] / 1,000

Note that grades and recoveries for all 15 oxides are included in the formula, represented by the "...".

- **Final Sellable Product (kg)** = Block Volume (m³) x Block Density (t/m³) x [La₂O₃ (ppm) x La₂O₃ Recovery (%) + Pr₂O₃ (ppm) x Pr₂O₃ Recovery (%) ...] / 1,000

Note that grades and recoveries of the five payable oxides are included in the formula, represented by the "..."



- **Cost (\$)** = Block Volume (m^3) x Block Density (t/m^3) x [Mining Cost (\$/t) + Concentrator Variable Cost (\$/t) + Total Fixed Cost (\$/t)] + Mx-REO Product (kg) / 1,000 x [Hydromet Plant Variable Cost (\$/t) + Transportation Cost (\$/t)] + Final Product (kg) / 1,000 x Separation Plant Variable Cost (\$/t)

Note that if the NMR of the block is below the cut-off value presented in the following paragraphs, only the mining costs are applied.

- **Revenue (\$)** = Block Volume (m^3) x Block Density (t/m^3) x [La_2O_3 (ppm) x La_2O_3 Recovery (%) x La_2O_3 Price (CAD/kg) + Pr_2O_3 (ppm) x Pr_2O_3 Recovery (%) x Pr_2O_3 Price (CAD/kg) ...] / 1,000

Note that the grades, recoveries and selling prices of the five payable oxides are included in the formula, represented by the "..."

Note that no revenue is given if the NMR of the block is below the cut-off value.

- **Net Block Value (\$)** = Revenue (\$) – Cost (\$)

Considering these formulas and the techno-economic parameters, the net metal return (NMR) cut-off value was calculated to be \$154/t. An elevated cut-off value of \$287/t was considered as the base-case for the MRE to ensure reasonable prospects of eventual economic extraction over a reasonable timeframe.

It is the QP's opinion that the cut-off value is relevant to the grade distribution of this Project and that the mineralization exhibits sufficient continuity for economic extraction under the cut-off that has been applied.

The resulting pit shell has a conical shape with a diameter of approximately 1,200 m, a depth of roughly 600 m, and has a 2.7:1 strip ratio.



14.15 Ashram Mineral Resource Estimate

The 2024 Ashram MRE is constrained within a pit shell developed from the abovementioned pit optimization using an appropriate cut-off value of \$287/t. Table 14-14 presents the results of the MRE.

Table 14-14: Ashram Mineral Resource Estimate

Cut-off NMR		\$287/t	
Category		Indicated	Inferred
Tonnes	Mt	73.2	131.1
Total TREO	%	1.89	1.91
Nd+Pr Oxide/TREO		21.2	21.4
Tb+Dy Oxide/TREO		0.7	0.5
La₂O₃	ppm	4,829	4,969
Ce ₂ O ₃		8,753	8,933
Pr₂O₃		907	927
Nd₂O₃		3,112	3,162
Sm ₂ O ₃		412	385
Eu ₂ O ₃		98	87
Gd ₂ O ₃		223	195
Tb₂O₃		24	19
Dy₂O₃		102	73
Ho ₂ O ₃		14	10
Er ₂ O ₃		31	21
Tm ₂ O ₃		3	2
Yb ₂ O ₃		18	13
Lu ₂ O ₃		2	2
Y ₂ O ₃		419	280
Fluorspar (CaF ₂)	%	6.6	4.0

Notes on the Ashram Resource table (Table 14-14):

1. Mineral resources are not mineral reserves as they have not demonstrated economic viability. The quantity and grade of reported Inferred Resources in this MRE are uncertain in nature and there has been insufficient exploration to define these Inferred Resources as Indicated or Measured. However, it is reasonably expected that the majority of Inferred Mineral Resources could be upgraded to Indicated Mineral Resources with continued exploration.



2. Resources are presented as undiluted and in situ for an open-pit scenario and are considered to have reasonable prospects for eventual economic extraction. The constraining pit shell was developed using an overall pit slope of 52 degrees, and the resulting strip ratio is 2.7:1.
3. Three-dimensional modelling was prepared using Leapfrog Geo v.2023.2.1 with a database of 213 surface drill holes, six surface channels and 32,962 samples, of which 117 drill holes and a total of 18,495 assays were used to interpolate the block model mineralized zones.
4. Resources encompass three REE-bearing zones (A-zone, B-Zone, and Breccia (Classic)), each defined by wireframes. A value of zero grade was applied in cases of core not assayed.
5. High-grade capping was done on the composited assay data and established on a per-zone basis for each element.
6. Density values were interpolated using ordinary kriging for four rock types in the geological model, including the three mineralized rock types (A-Zone, B-Zones and Breccia (Classic)), with density averages of 3.08 g/cm³ for A-Zone, 3.00 g/cm³ for B-Zone, 3.05 g/cm³ for Breccia (Classic), and 2.92 g/cm³ for BD-Zone. Surrounding country rock lithologies were given a fixed density value from their range median values: Carbonatites ranging from 2.85 g/cm³ to 2.97 g/cm³, Metavolcanic = 2.84 g/cm³, and Lamprophyre = 2.97 g/cm³. Grade model resource estimation was interpolated from drill hole data using an OK interpolation method in a sub-blocked block model using blocks measuring 5 m x 5 m x 5 m in size and sub-blocks down to 1.25 m x 1.25 m x 1.25 m.
7. The MRE cut-off, expressed as a NMR value, was calculated to be CAD154/t, which is based on a 3-year annualized average (2021, 2022 and 2023) for the five payable oxides; (USD1.25/kg for La₂O₃, USD95/kg for Pr₂O₃, USD95/kg for Nd₂O₃, USD1,500/kg for Tb₂O₃, and USD375/kg for Dy₂O₃), estimated metal recoveries, and operating costs for mining, processing, transportation and G&A. A cut-off of CAD287/t is considered as the base case for the MRE and is guided by reasonable prospects of eventual economic extraction over a reasonable timeframe. The cut-off grade considers a CAD:USD exchange rate of 1.30. Metal prices sourced from Adamas Intelligence's Rare Earth Pricing Quarterly Outlook (Q1 2024).
8. Inferred mineral resources are constrained to areas where drill spacing is less than 200 m, and where reasonable geological and grade continuity is shown. Indicated mineral resources are constrained to areas where drill spacing is less than 70 m, and where reasonable geological and grade continuity is displayed
9. An open-pit mining method was considered for the MRE and a conceptual pit shell to constrain the resources was developed using Hexagon's MinePlan 3D software, Version 16.05.
10. TREO is the sum of lanthanides (as oxides) + yttrium oxide. NdPr distribution is calculated as (Nd₂O₃ + Pr₂O₃) / TREO x 100. TbDy distribution calculated as (Tb₂O₃ + Dy₂O₃) / TREO x 100. CaF₂ is calculated from fluorine assay using factor of 2.055 (F to CaF₂) and assumes all fluorine is contained within the mineral fluorite (fluorspar).
11. Calculations used metric units (metre, tonne). Metric tonnages have been rounded, and any discrepancies in total amounts are due to rounding errors.
12. CIM definitions and guidelines (2019) for Mineral Resource Estimates have been followed.
13. The QPs are unaware of any known environmental, permitting, legal, title-related, taxation, socio-political or marketing issues or any other relevant issues that could materially affect this MRE.



Table 14-15 and Figure 14-15 illustrate the sensitivity of the 2024 Ashram Deposit MRE with respect to various net metal return cut-offs for a potential open-pit scenario. The figures provided in these tables should not be interpreted as a mineral resource statement.

Table 14-15: Mineral resource sensitivity analysis based on NMR \$/t cut-off

Cut-off: NMRt ≥ 154.00 \$/t																		
Classification	Tonnage Mt	Average Value																
		TREO %	La ₂ O ₃ ppm	Pr ₂ O ₃ ppm	Nd ₂ O ₃ ppm	Tb ₂ O ₃ ppm	Dy ₂ O ₃ ppm	Ce ₂ O ₃ ppm	Eu ₂ O ₃ ppm	Gd ₂ O ₃ ppm	Sm ₂ O ₃ ppm	Er ₂ O ₃ ppm	Ho ₂ O ₃ ppm	Tm ₂ O ₃ ppm	Y ₂ O ₃ ppm	Yb ₂ O ₃ ppm	Lu ₂ O ₃ ppm	CaF ₂ %
Indicated	84.2	1.8	4,648	880	3,029	24	98	8,461	96	216	402	30	14	3	405	18	2	6.3
Inferred	199.6	1.7	4,316	826	2,854	18	74	7,864	82	185	357	22	10	2	292	14	2	3.9
Cut-off: NMRt ≥ 221.00 \$/t																		
Classification	Tonnage Mt	Average Value																
		TREO %	La ₂ O ₃ ppm	Pr ₂ O ₃ ppm	Nd ₂ O ₃ ppm	Tb ₂ O ₃ ppm	Dy ₂ O ₃ ppm	Ce ₂ O ₃ ppm	Eu ₂ O ₃ ppm	Gd ₂ O ₃ ppm	Sm ₂ O ₃ ppm	Er ₂ O ₃ ppm	Ho ₂ O ₃ ppm	Tm ₂ O ₃ ppm	Y ₂ O ₃ ppm	Yb ₂ O ₃ ppm	Lu ₂ O ₃ ppm	CaF ₂ %
Indicated	84	1.8	4,663	882	3,035	24	98	8,485	96	216	402	30	14	3	405	18	2	6.4
Inferred	182.7	1.8	4,524	858	2,953	19	74	8,206	84	189	367	22	10	2	289	13	2	4.0
Cut-off: NMRt ≥ 287.00 \$/t - BASE CASE																		
Classification	Tonnage Mt	Average Value																
		TREO %	La ₂ O ₃ ppm	Pr ₂ O ₃ ppm	Nd ₂ O ₃ ppm	Tb ₂ O ₃ ppm	Dy ₂ O ₃ ppm	Ce ₂ O ₃ ppm	Eu ₂ O ₃ ppm	Gd ₂ O ₃ ppm	Sm ₂ O ₃ ppm	Er ₂ O ₃ ppm	Ho ₂ O ₃ ppm	Tm ₂ O ₃ ppm	Y ₂ O ₃ ppm	Yb ₂ O ₃ ppm	Lu ₂ O ₃ ppm	CaF ₂ %
Indicated	73.2	1.9	4,829	907	3,112	24	102	8,753	98	223	412	31	14	3	419	18	2	6.6
Inferred	131.1	1.9	4,969	927	3,162	19	73	8,933	87	195	385	21	10	2	280	13	2	4.1
Cut-off: NMRt ≥ 320.00 \$/t																		
Classification	Tonnage Mt	Average Value																
		TREO %	La ₂ O ₃ ppm	Pr ₂ O ₃ ppm	Nd ₂ O ₃ ppm	Tb ₂ O ₃ ppm	Dy ₂ O ₃ ppm	Ce ₂ O ₃ ppm	Eu ₂ O ₃ ppm	Gd ₂ O ₃ ppm	Sm ₂ O ₃ ppm	Er ₂ O ₃ ppm	Ho ₂ O ₃ ppm	Tm ₂ O ₃ ppm	Y ₂ O ₃ ppm	Yb ₂ O ₃ ppm	Lu ₂ O ₃ ppm	CaF ₂ %
Indicated	50.9	2.0	5,027	943	3,232	26	107	9,109	103	234	429	32	15	4	442	19	2	6.8
Inferred	79.9	2.0	5,244	979	3,331	20	76	9,437	91	206	404	22	10	2	290	13	2	4.1
Cut-off: NMRt ≥ 353.00 \$/t																		
Classification	Tonnage Mt	Average Value																
		TREO %	La ₂ O ₃ ppm	Pr ₂ O ₃ ppm	Nd ₂ O ₃ ppm	Tb ₂ O ₃ ppm	Dy ₂ O ₃ ppm	Ce ₂ O ₃ ppm	Eu ₂ O ₃ ppm	Gd ₂ O ₃ ppm	Sm ₂ O ₃ ppm	Er ₂ O ₃ ppm	Ho ₂ O ₃ ppm	Tm ₂ O ₃ ppm	Y ₂ O ₃ ppm	Yb ₂ O ₃ ppm	Lu ₂ O ₃ ppm	CaF ₂ %
Indicated	20.0	2.1	5,406	1,004	3,442	27	115	9,742	109	249	454	35	16	4	470	20	3	6.6
Inferred	30.3	2.2	5,658	1,048	3,577	20	74	10,143	94	216	427	21	10	2	277	12	2	3.8
Note: Differences may occur in totals due to rounding.																		

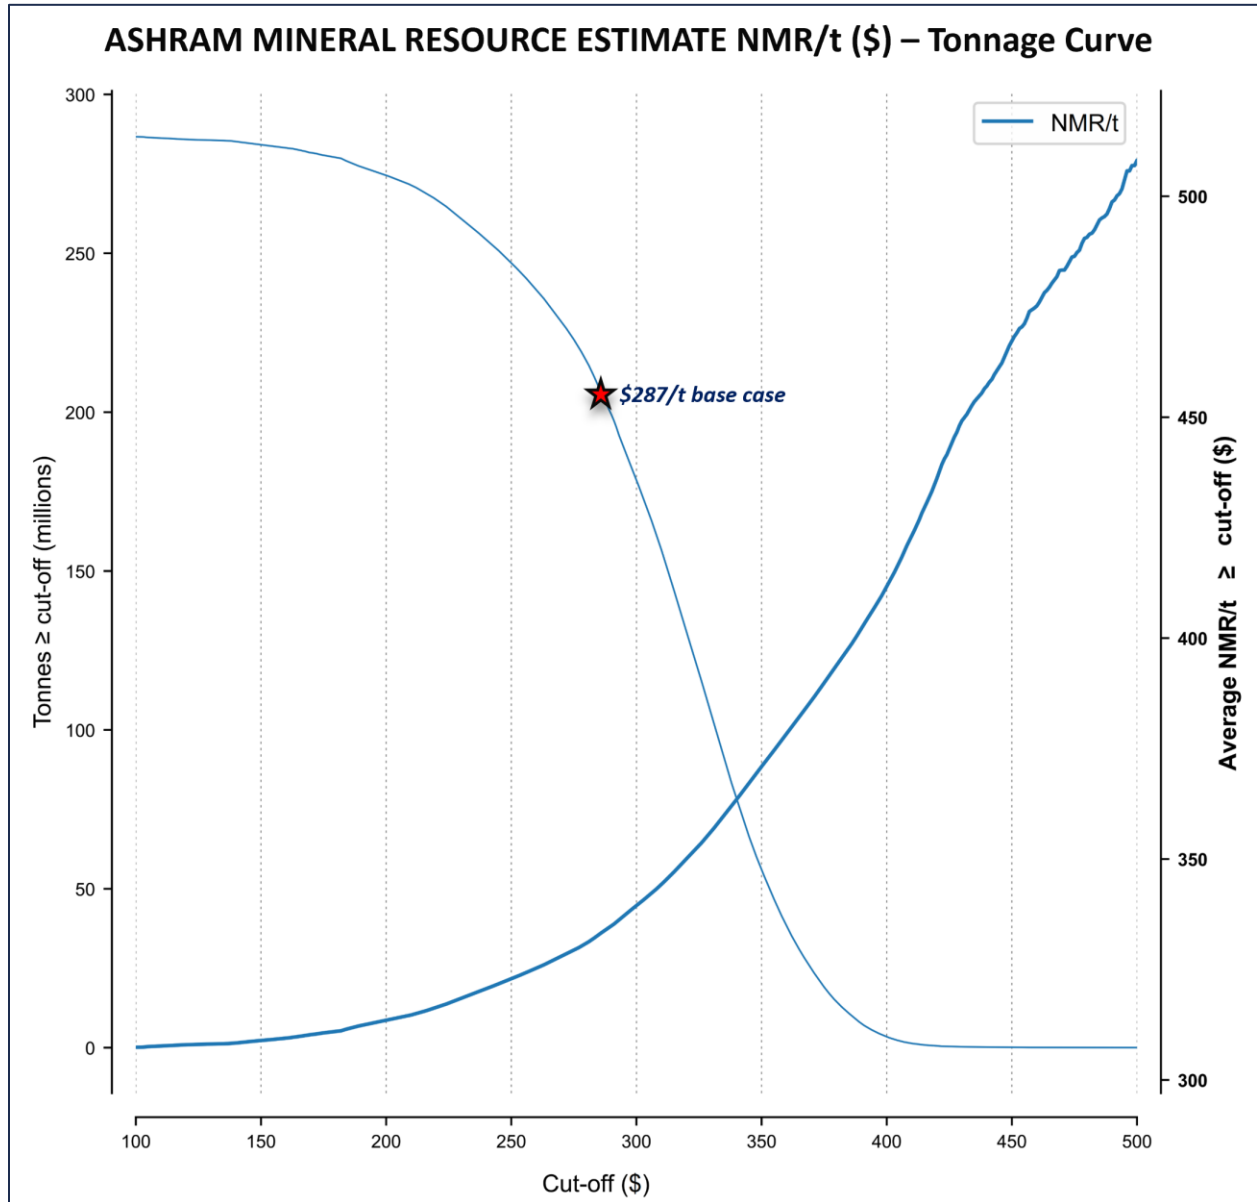


Figure 14-15: Grade-tonnage curve with base case NMR \$287/t cut-off

Figure 14-16 shows the surface projection of the pit shell and mineralized footprint of the Ashram Deposit, with its lithological domains (A-Zone, B-Zone, Breccia (Classic)). It also includes the BD-Zone, another REE-bearing lithology that requires additional metallurgical studies due to their different REE-bearing mineralogy. The BD-Zone was therefore not considered in this MRE but represents potential upside to the Project.



Figure 14-17 is a cross-section of the REE-bearing lithologies that form the basis of the updated Mineral Resource Estimate.

Figure 14-18 displays the Indicated and Inferred resource breakout in the block model, which is shown in subsequent figures as dashed contour lines.

Figure 14-19 shows the NMR (\$/t) distribution within the Deposit, with Figure 14-20 showing the respective TREO (%) distribution within the same block model slice. Figure 14-21 and Figure 14-22 are cross-sections of the REE-oxide ratios NdPr and TbDy, respectively. Figure 14-21 shows higher NdPr grade near surface, which continues to be favourable throughout the Deposit. The TbDy distribution shown in Figure 14-22 is overlapping with the higher grade NdPr near surface but is not as elevated at depth.

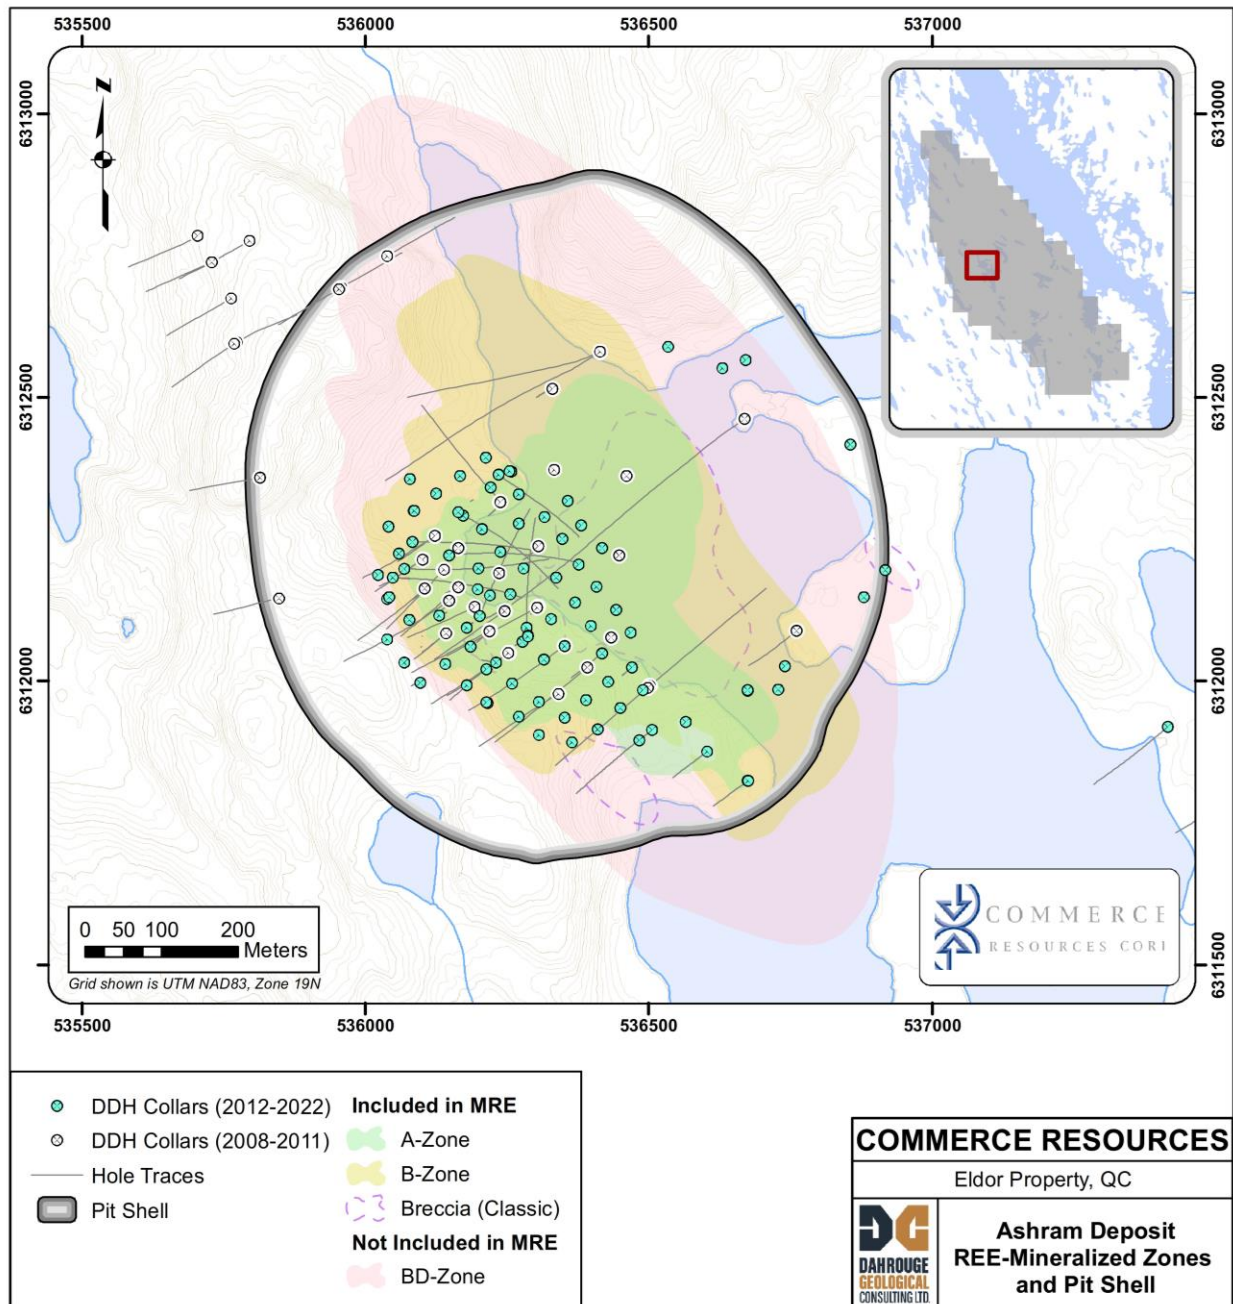


Figure 14-16: Pit shell and mineralized footprint of Ashram's MRE, highlighting the deposit scale and drilling post-2012 MRE used to improve the MRE

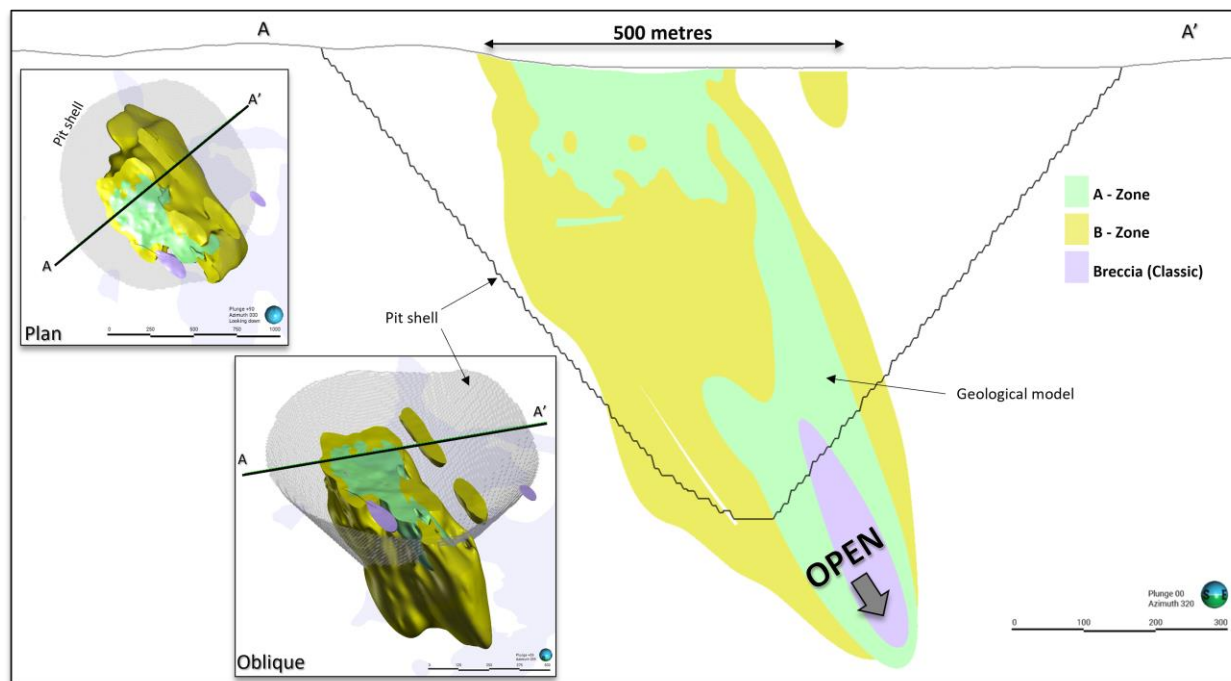


Figure 14-17: Cross-section of the Ashram Deposit highlighting carbonatite lithological domains considered in the MRE (A-Zone, B-Zone, Breccia (Classic))
Note that the BD-Zone (not shown) is currently not part of the MRE

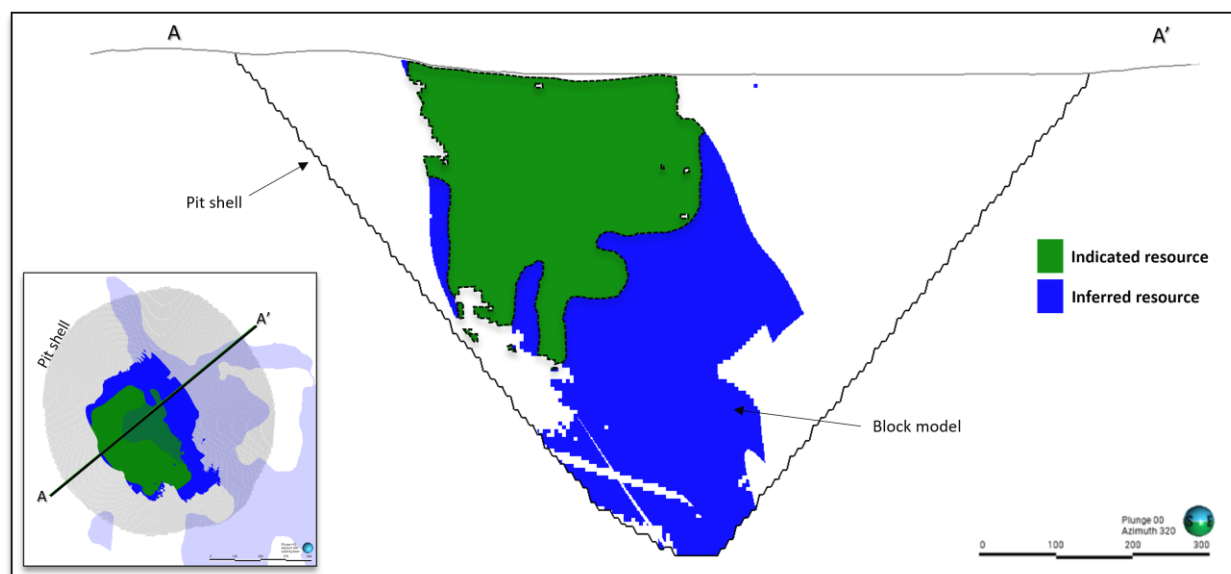


Figure 14-18: Cross-section showing Indicated and Inferred classifications within the block model

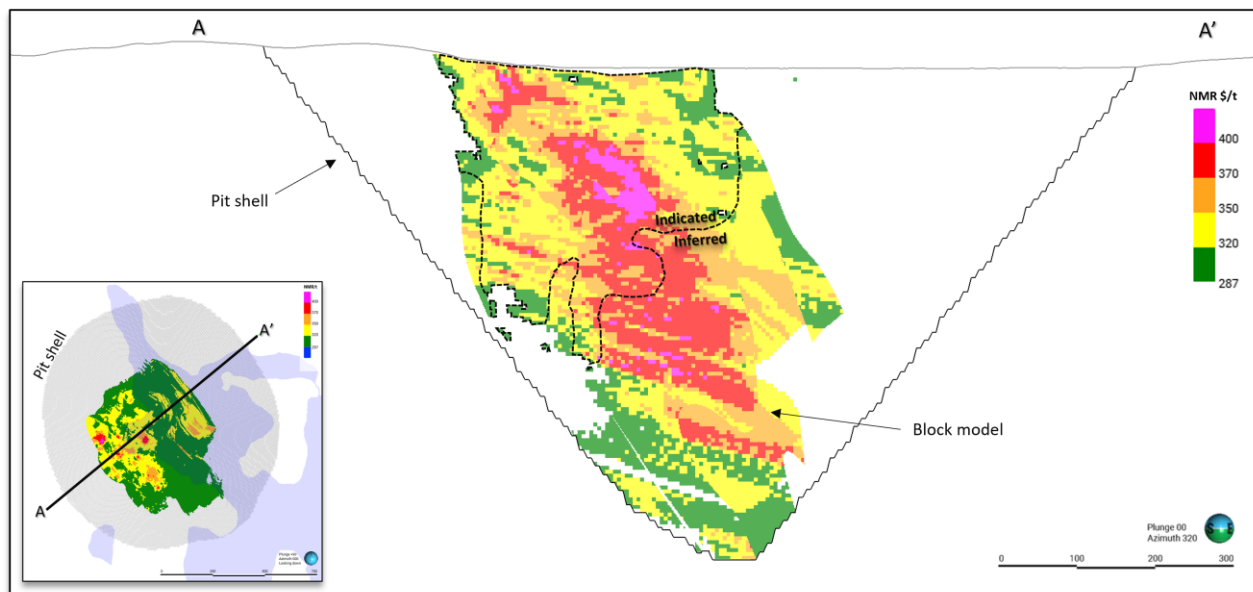


Figure 14-19: Cross-section showing the NMR \$/t distribution

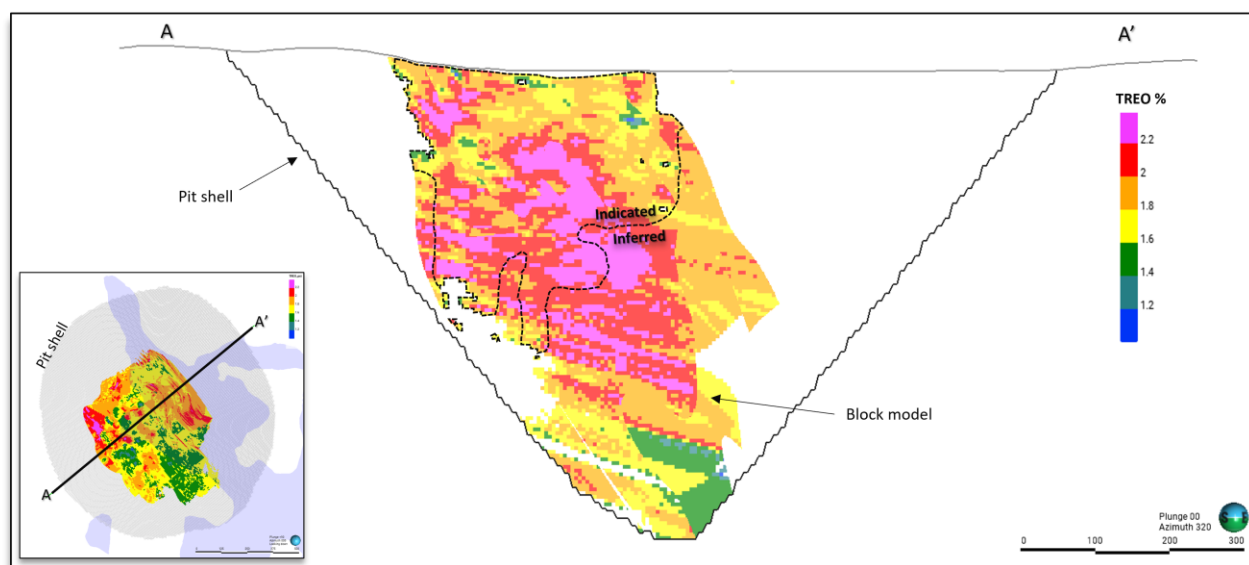


Figure 14-20: Cross-section showing the TREO % distribution

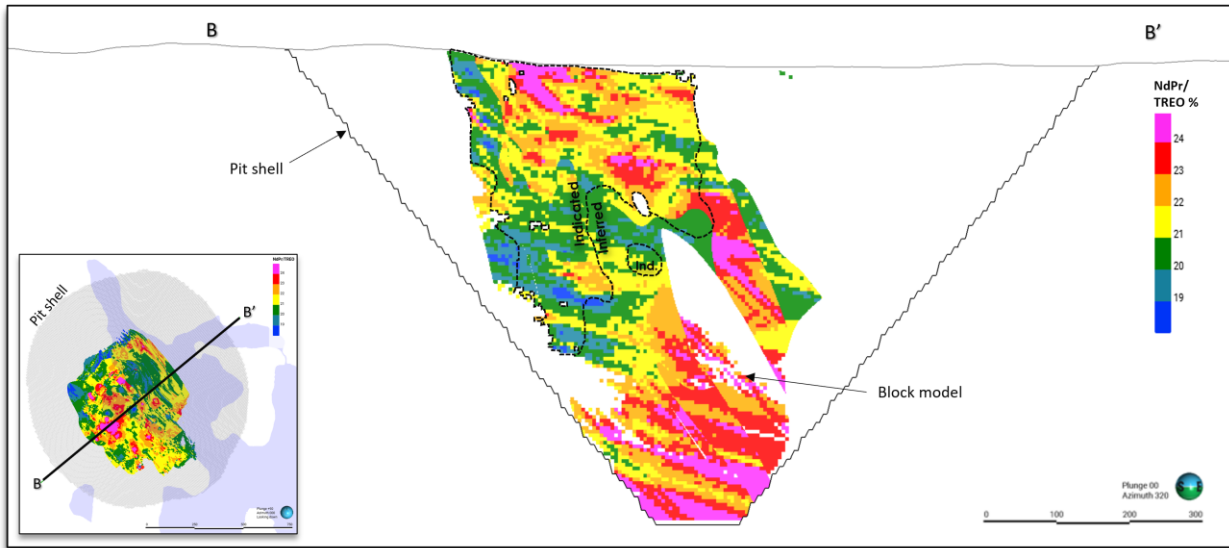


Figure 14-21: Cross-section showing the NdPr distribution

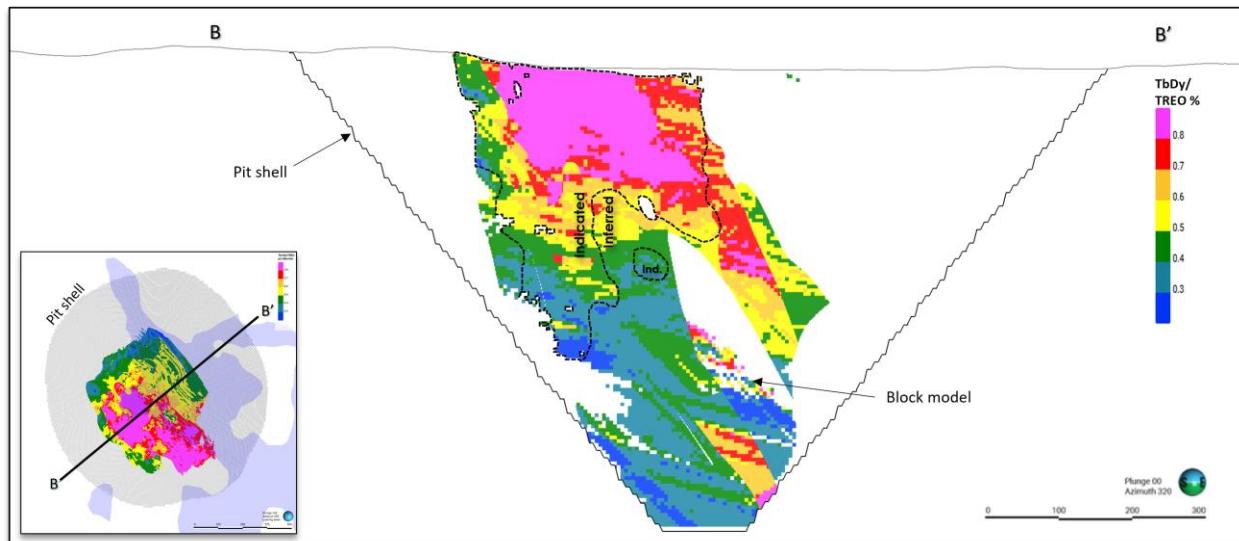


Figure 14-22: Cross-section showing the TbDy distribution



15. Mineral Reserve Estimates

This chapter is not required for a Mineral Resource Estimate technical report.



16. Mining Methods

This chapter is not required for a Mineral Resource Estimate technical report.



Commerce Resources Corp.

NI 43-101 Technical Report

Mineral Resource Estimate for the Ashram Rare Earth Element
and Fluorspar Deposit



17. Recovery Methods

This chapter is not required for a Mineral Resource Estimate technical report.



18. Project Infrastructure

This chapter is not required for a Mineral Resource Estimate technical report.



19. Market Studies and Contracts

This chapter is not required for a Mineral Resource Estimate technical report.



20. Environmental Studies, Permitting, and Social or Community Impact

This chapter is not required for a Mineral Resource Estimate technical report.



21. Capital and Operating Costs

This chapter is not required for a Mineral Resource Estimate technical report.



Commerce Resources Corp.

NI 43-101 Technical Report

Mineral Resource Estimate for the Ashram Rare Earth Element
and Fluorspar Deposit



22. Economic Analysis

This chapter is not required for a Mineral Resource Estimate technical report.



23. Adjacent Properties

Other companies (sole proprietors and joint ventures) or individuals own mineral titles in proximity of the Eldor Property. In addition to rare earth elements, this sub-region of the Labrador Trough is prospective for a variety of commodities including gold, silver, base metals, platinum group elements, and iron. Mineralization on other properties is not indicative of the mineralization on the Eldor Property. Figure 23-1 shows a map of the mineral titles in the vicinity of the Eldor Property.

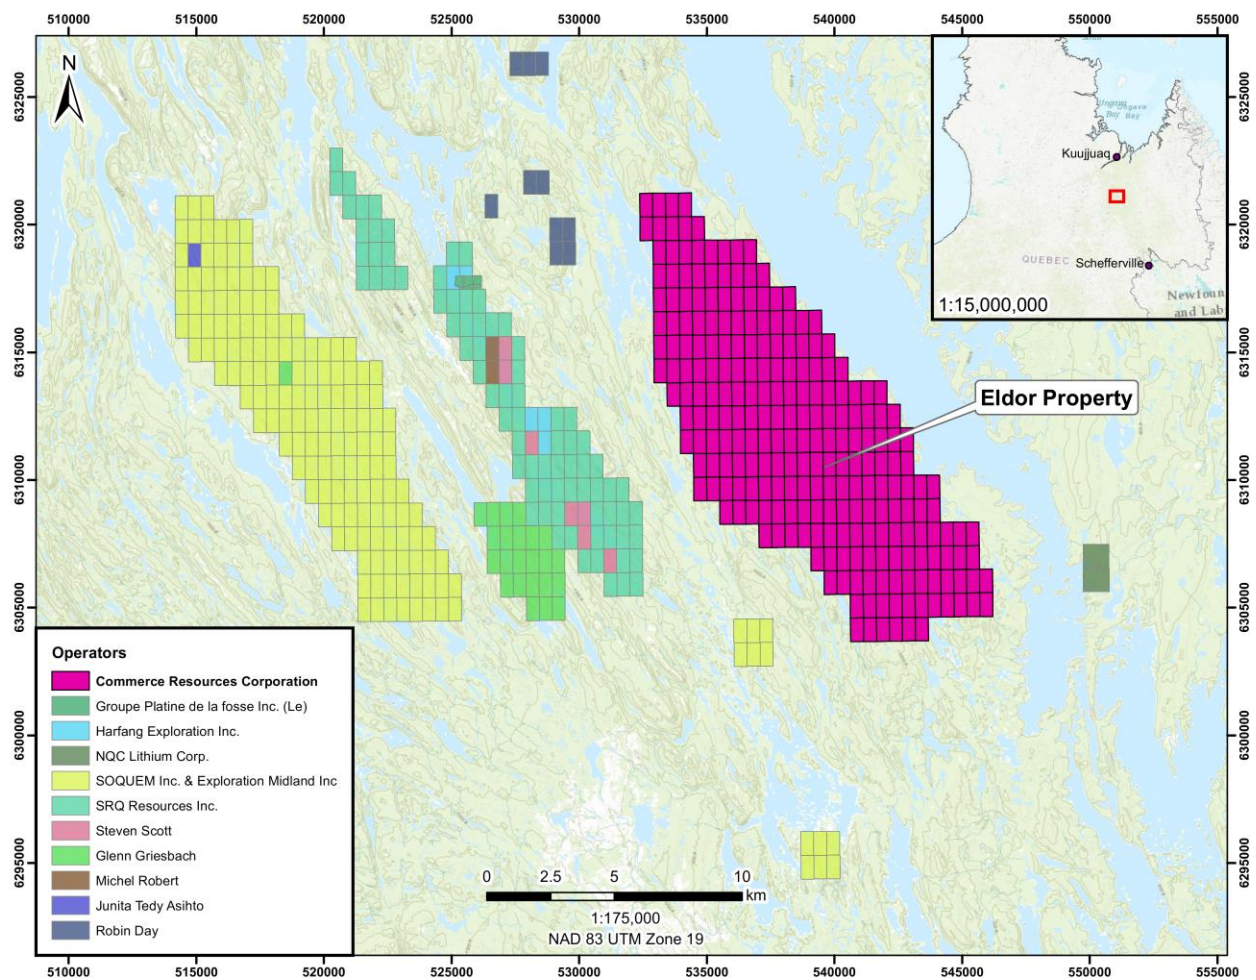


Figure 23-1: Map of adjacent properties and operators in the vicinity of the Eldor Property



24. Other Relevant Data and Information

The Company has initiated discussions with third parties that could lead to an off-take agreement on lanthanum oxide. As of the effective date of this Technical Report, the Company has signed a non-binding letter of intent with a major industry player, the terms of which (quantity, price, etc.) have yet to be defined and agreed.

There is no other relevant data or information to disclose.



25. Interpretation and Conclusions

The Ashram Project (REE and fluorspar) demonstrates a strong potential for growth, with the Eldor Property showing a strong potential for additional significant discovery of niobium-tantalum mineralization; most notably from the Mallard and Miranna Prospect within the Southeast Area as discussed in prior reports (Smith, Schmidt, & Carter, 2014).

The Ashram Deposit is one of the largest rare earth deposits globally. Furthermore, the deposit hosts a monazite dominant rare earth mineralogy with demonstrated mineral processing ability to produce high-grade (+30% REO) monazite mineral concentrates using conventional process techniques. Additionally, the Ashram Deposit has a fluorspar component that makes it one of the largest potential sources of fluorspar in the world.

25.1 Mineral Resources

The independent qualified persons for the 2024 MRE, as defined by National Instrument (NI) 43-101 guidelines, are Pierre-Luc Richard, P.Geo., of PLR Resources Inc. (Mineral Resource Estimate), Jeffrey Cassoff, P.Eng., of BBA Inc. (Pit shell optimization and cut-off grade), Jordan Zampini, P.Eng., of DRA Global (Mineral Processing parameters), and Tommee Larochelle, P.Eng., of L3 Process Development (Hydrometallurgical parameters). The effective date of the 2024 MRE is April 4, 2024.

The QP considers the MRE reliable and based on quality data, reasonable hypotheses and parameters that follow CIM Definition Standards. After completing the MRE and performing a detailed review of all pertinent information, the QPs reached the conclusions that the Ashram deposit contains estimated Indicated Resources of 73.2 Mt at 1.89% TREO and 6.6% CaF₂ and estimated Inferred Resources of 131.1 Mt at 1.91% TREO and 4.0% CaF₂.

25.2 Exploration Potential

25.2.1 Miranna Prospect

The niobium – tantalum ± phosphate potential of the Miranna Prospect is significant. The 2015, 2016, and 2017 prospecting programs all returned high-grade boulders, with highest grade boulder from the area to date (5.93% Nb₂O₅) collected in 2015.



The data indicates that several boulder trains are present in the Miranna Area, and therefore, may indicate multiple bedrock sources. The primary target is a magnetic high anomaly which appears to coincide with the interpreted apex of the mineralized boulder train (Figure 25-1). A second prospective target, termed the Moira Target, is located approximately 200 m north of Miranna and is also represented by a magnetic high, although of lower intensity.

The Miranna Area is located approximately 1 km east of the Ashram Deposit, which suggests there could be significant potential for eventual development synergies in the event a deposit of merit is defined at Miranna.



Commerce Resources Corp.

NI 43-101 Technical Report

Mineral Resource Estimate for the Ashram Rare Earth Element
and Fluorspar Deposit

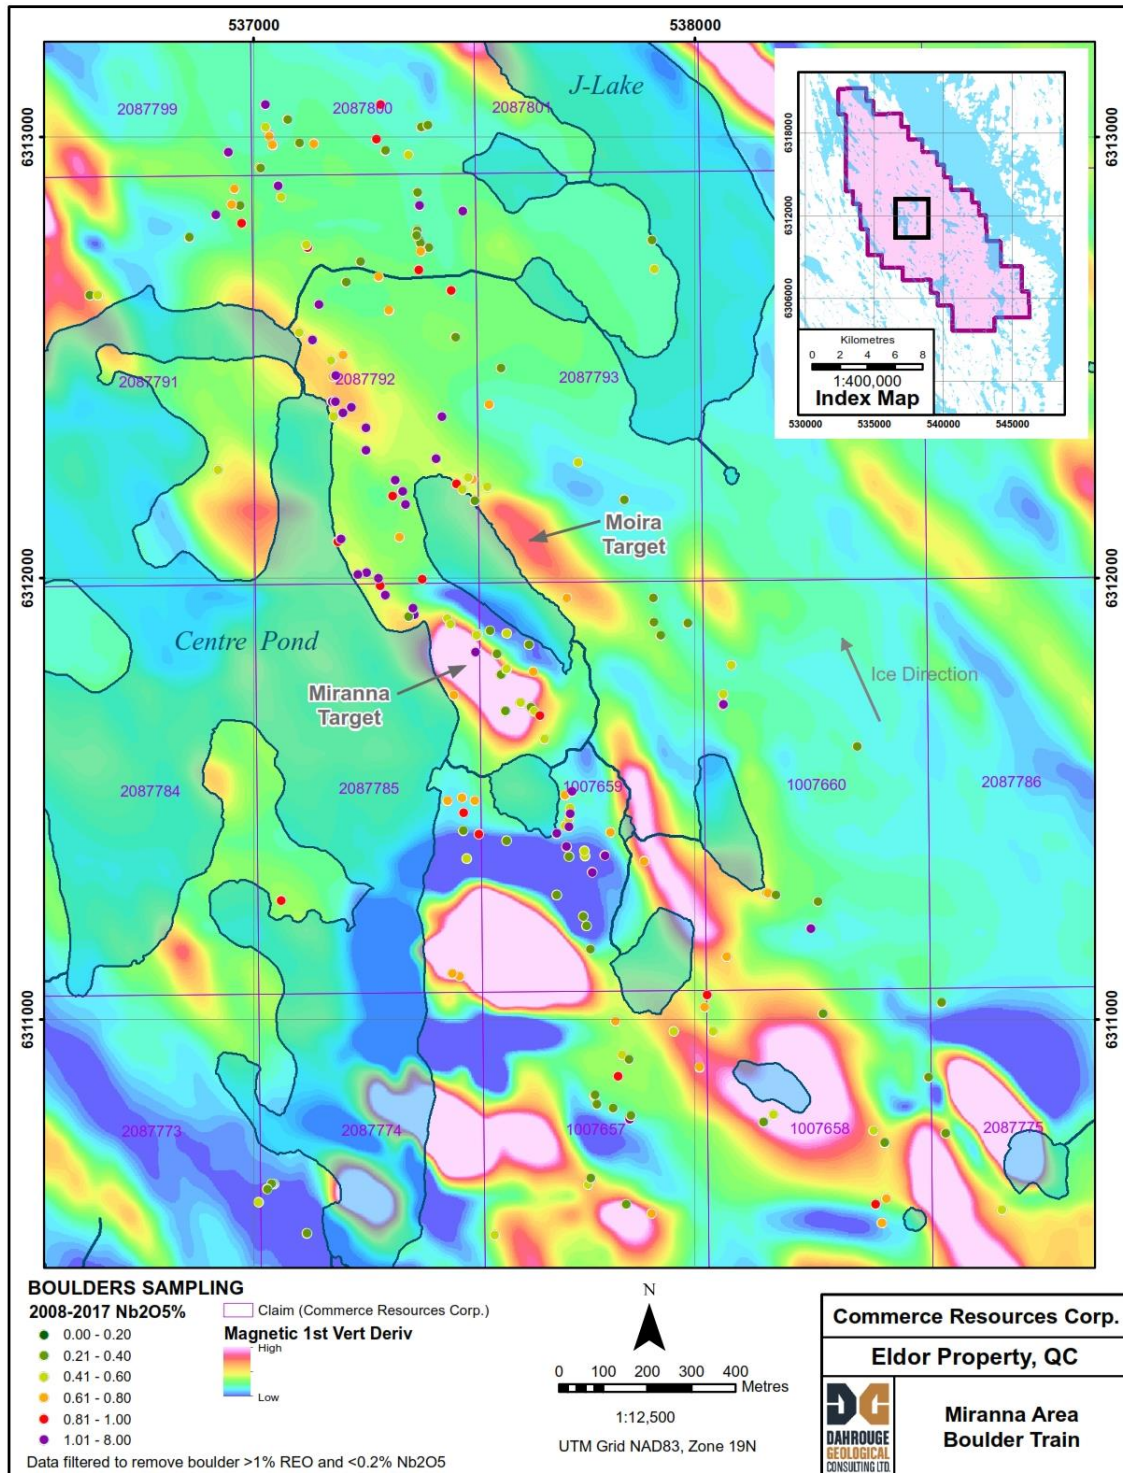


Figure 25-1: Miranna area targets



25.3 Project Risks and Opportunities

None of the QPs are aware of any known environmental, permitting, legal, title, taxation, socio-economic, marketing, political or relevant issues that could be expected to affect the reliability or confidence in the information discussed in this Report or the right or ability to perform future work on the Project. Nonetheless, as with most mining projects, some inherent risks could affect the Project's economic viability. Many of these are due to a lack of information and can be managed as more sampling, testing, modelling, design and engineering are conducted. There are also significant opportunities that could mitigate some of the risks and potentially improve the Project economics, schedule, and environmental and social impacts.

Table 25-1 and Table 25-2 present the main risks and opportunities specific to the Project identified for this phase of the Project, excluding the external risks and opportunities such as the metal prices, exchange rate, political situation and government legislation that typically apply to all mining projects.

Table 25-1: Project risks (preliminary risk assessment)

Area	Risk Description and Potential Impact	Mitigation Approach
Geology and Mineral Resources	1. It is possible that some grade smearing occurs in the current model near localized higher-grade zones, mainly at depth where inferred resources are reported.	1. Additional drilling and an improved 3D model would help mitigate such risks.
Mineral Processing and Metallurgy	1. Non-representativity of samples used for the test work program could lead to lower actual recoveries and / or higher operating costs. 2. Data obtained in small, discontinued batch experiments may not reflect actual commercial performance of the integrated process.	1. Plan and execute a variability testing campaign on different samples matching the deposit grade and mineralogical structure during the next process development phase. 2. Plan and execute larger scale batch experiments, a small-scale piloting campaign and a larger scale demonstration plant using varied representative samples from the deposit.



Table 25-2: Project opportunities

Area	Risk Description and Potential Impact	Potential Benefit
Geology and Mineral Resources	1. Potential to add to the Ashram MRE by extending the resource modelling at depth. 2. Potential to upgrade inferred mineral resources to the indicated category with additional drilling. 3. Potential to upgrade indicated mineral resources to the measured category with additional drilling.	1. Increase in mineral resources. 2. Increase in mineral resource confidence. 3. Increase in mineral resource confidence.
Mineral Processing and Metallurgy	1. Potential for larger scale or closed-circuit metallurgical testing to produce a higher grade or recovery mineral concentrate than previously tested. 2. Potential to generate a fluorspar by-product from the REE flotation tailings.	1. Decreased operating costs per tonne processed and/or higher revenue. 2. Increase in project revenue and decrease in overall tonnes of tailings produced.



26. Recommendations

The QPs recommend that the Project proceeds to the next phase of project development through a Preliminary Economic Assessment (PEA), and that there is significant potential on the Property to delineate additional resources and that further drilling and exploration are warranted.

The following proposed work program will help advance the Project and provide key inputs required to evaluate its economic viability.

26.1 Phase 1

26.1.1 PEA on the Ashram Deposit

A PEA is recommended as part of the next phase of the Project. The planned study will comprise not only the necessary mine, processing and general infrastructure required at the Ashram site, but also the road and marine infrastructure needed to service the site. The study must also consider the logistical aspects that are particular to remote mine projects in Canada's north. A processing facility in southern Canada, a plant that will undertake a partial separation of the mixed rare earth product, will also be considered.

The compiled budget presented in Table 26-1 is roughly broken down. Note that some activities have already been initiated or completed in some cases. Metallurgical testing, for example, has largely been completed for the PEA at the time of issue of this Report. There has also already been considerable advancement on the Transport Road element, which will see a field study completed in July.

26.1.2 Mineral Processing Testing

The PEA mineral processing test program is ongoing and will be completed and reported on before the completion of the PEA.

The next stage of project development should advance the mineral processing flow diagram to optimize flotation performance, perform testing on point variability samples throughout the Deposit to demonstrate the robustness of the flowsheet, perform continuous pilot plant testing of the flotation process to demonstrate scalability, and investigate potential by-product generation from flotation tailings.



26.1.3 Hydrometallurgical Process Development

The next stage of project development should further advance the full hydrometallurgical process flow diagram to produce representative samples of a marketable rare earth intermediate product (e.g., mixed rare earth carbonate, oxide, oxalate, or chloride) or partially separated products (e.g., NdPr oxide, TbDy oxide). This test work should be completed on representative high-grade flotation concentrates produced from a series of large batch locked cycle tests or continuous pilot.

Additional test work should also be performed to optimize the recovery in the Acid Bake-Water Leach process using higher initial acid ratio, and an acid recovery step.

Finally, additional test work should be performed on the direct oxalic precipitation to minimize the oxalic acid requirement and minimize impurities in the final product.

26.1.4 Drilling exploration on the Niobium Targets

The Property holds significant potential for niobium ($\pm$ tantalum, phosphate, and fluorspar) and a 7,500 m drilling program is proposed to better define this potential, highlighted by the Miranna and Mallard Prospects. Such exploration has reasonable potential to result in significant discovery which, if were to merit development, would enhance the development prospects of the Ashram Project due shared infrastructure and logistics, and other cost synergies.

26.2 Phase 2

26.2.1 Definition Drilling on Ashram

Drilling should be focused on upgrading classification from Inferred Resources to Indicated Resources targeting the highest-value portion of the Ashram Deposit block model close to surface that would form the basis of an eventual starter pit. Additionally drilling should be considered in the context of development to ensure the geological model remains robust throughout the base case open-pit considered for the PEA in Phase 1.

A total of 15,000 m of drilling is proposed at this stage, but additional work is needed to better define this drilling program once the PEA has been completed in Phase 1.



26.3 Proposed Budget

The estimated cost for the recommended work program is approximately \$10.4M for Phase 1 and \$13.0M for Phase 2 for a total of \$23.3M, based on certain assumptions and current site costs. The estimate includes a 15% contingency. Table 26-1 summarizes the estimated cost for the required field work and studies to support the next phases of project development.

Table 26-1: Proposed work program budget

Description	Estimated Cost (\$)
Phase 1	
PEA on the Ashram Deposit (including all subcomponents)	2,500,000
Mineral Processing Testing	500,000
Hydrometallurgical Process Development	1,000,000
Drilling Exploration on the Miranna Niobium Target	5,000,000
Subtotal (Phase 1)	9,000,000
Contingency (15%)	1,325,000
Total (Phase 1):	10,350,000
Phase 2	
Definition Drilling on Ashram	11,250,000
Subtotal (Phase 2)	11,250,000
Contingency (15%)	1,687,500
Total (Phase 2):	12,937,500
Total (Phases 1 and 2):	23,287,500



27. References

- Avramtchez et al. (1990). Carte des Gites Minéraux du Québec. Région de la Fosse du Labrador, DV 84-01. Publication du M.E.R.
- Bandyayera et al. (2002). Cartes Préliminaires en Couleur des Travaux de Cartographie et des Études 2002-2003, DV 2002-11. Publication de M.E.R.
- Beaumier, M. (1987). Géochimie des Sédiments de Lac: Région du Lac Otnuk, DP 87-14. Publication du M.E.R. (DP 86-26).
- Birkett, T., and Clark, T. (1991). A Lower Proterozoic Carbonatite at Lac LeMoyne, Northern Quebec: Geology and Mineral Potential. Geological Survey of Canada, Current Activities Forum, Program and Abstracts, page 18.
- Birkett, T.C. and Simandl, G.J. (1999). Carbonatite associated Deposits: Magmatic, Replacement and Residual; in Selected British Columbia Mineral Deposit Profiles, Volume 3 Industrial Minerals, G.J. Simandl, Z.D. Hora and D.V. Lefebure, Editors, British Columbia Ministry of Energy and Mines.
- Canadian Climate (1991-2020). [Canadian Climate Normals - Climate - Environment and Climate Change Canada \(weather.gc.ca\)](https://weather.gc.ca/).
- CIM (2014). Canadian Institute of Mining, Metallurgical and Petroleum, CIM Definition Standards for Mineral Resources and Mineral Reserves, adopted by the CIM Council on May 10, 2014.
- CIM (2019). Canadian Institute of Mining, Metallurgical and Petroleum, CIM Estimation of Mineral Resources and Mineral Reserves Best Practice Guidelines, adopted by the CIM Council November 29, 2019.
- CIM (2020). Canadian Institute of Mining, Metallurgical and Petroleum, CIM Guidance on Commodity Pricing and Other Issues related to Mineral Resource and Mineral Reserve Estimation and Reporting, adopted by CIM Council August 28, 2020.
- Clark, T., and Wares, T. (2006). Lithotectonic and Metallogenic Synthesis of the New Quebec Orogen (Labrador Trough), MM 2005-01. Publication du M.E.R.
- Demers, M., and Blanchet, C. (2001). Propriété Lac Erlandson-Ta Reconnaissance Géologique August 2001. Mines d'Or Virginia Inc. Assessment report submitted to the Government of Québec; GM_59926, 99 pages, 3 plans.
- Dressler B. (1974). Géochimie des Sédiments de Ruisseau: Région du Lac Nachikapau (Nouveau Québec), DP 422. Publication du M.E.R.



- Dressler B. and Ciesielski (1979). Région de la Fosse du Labrador, Rapport Géologique RG 195. Québec: MRN.
- Gagnon, G., Rousseau, G., Camus, Y., and Gagné, J. (2012). NI 43-101 Technical Report - Preliminary Economic Assessment for the Ashram Rare Earth Deposit prepared for Commerce Resources Corp. by SGS Canada Inc. Effective July 5, 2012.
- GESTIM, 2024. [Québec Ministère des Ressources naturelles et des Forêts. \(2024, June 10\). Récupéré sur GESTIM des titres miniers: https://gestim.mines.gouv.qc.ca](https://gestim.mines.gouv.qc.ca)
- James et al. (2003). The Southeastern Churchill Province Revisited: U-Pb Geochronology, Regional Correlations, and Enigmatic Orma Domain, Current Research, Report 03-1. Newfoundland Department of Mines and Energy Geological Survey.
- Knox, A.W. (1986). 1985 Field Examination Eldor Carbonatite, Québec. Unocal Canada Ltd.
- Knox, A.W. (2011) Some Notes and Observations on the Geology of the Ashram Zone, Eldor Carbonatite, New Quebec. Internal Report for Commerce Resources Corp. 5 pages
- Lafontaine, M. (1984). Permit 669 Prospection et Cartographie, GM40910. Eldor Resources Ltd., 19 pages with maps.
- Laferrière, A. (2011). Technical Report: Mineral Resource Estimation: Eldor Property – Ashram Deposit, Nunavik, Québec. Commerce Resources Corporation, Montreal (Blainville): SGS Geostat (Blainville).
- Larochelle, T., Dissem, N., Lafontaine, S., and Larochelle, E. (2024). Hydrometallurgical Process Development for the Recovery of Rare Earth Elements from the Ashram Deposit. Abstract prepared by L3 Process Development. 19 pages.
- Mackay, D. A., & Simandl, G. J. (2014). Geology, market and supply chain of niobium and tantalum—a review. *Mineralium Deposita*, 49, 1025-1047.
- Meusy et al. (1984). The Carbonatite Completed of Permit 669, New Québec. Eldor Resources Ltd., 10 pages with map.
- Mitchell, R.H. (2011). Mineralogy of the Ashram Rare Earth Element Occurrence. Internal Report for Commerce Resources Corp.
- Richardson, D.G., and Birkett, T.C., (1996) Carbonatite Associated Deposits, in *Geology of Canadian Mineral Deposit Types*, (ed.) O.R. Eckstrand, W.D. Sinclair, and R.I. Thorpe; Geological Survey of Canada, Geology of Canada, no. 8, p.541-558 (also Geological society of America, *The Geology of North America*, v.P-1).



- Schmidt, P. T. (2013). High-field-strength element distribution of the Eldor carbonatite complex, Canada. Karls-Eberhart Universität, Tübingen. Diploma thesis.
- Schmidt, P. T., Samson, I. M., William-Jones, A. E., and Smith, D. L. (2017). HFSE evolution of the Eldor Carbonatite. SGA 2017 conference abstract.
- Smith, D.L., and Brown, J. (2016). 2012, 2013, and 2014 Exploration of the Eldor Property, Quebec. Commerce Resources Corp.
- Smith, D.L. and Peter-Rennich, A. (2010). 2008 and 2009 Exploration of the Eldor Property, Northern Quebec. Commerce Resources Corp.
- Smith, D.L., Schmidt, N., and Carter, M. (2014). 2010 and 2011 Exploration of the Eldor Property, Northern Quebec. Commerce Resources Corp.
- Smith, D.L., D'Souza R., and Know A.W. (2008). 2007 Exploration of the Eldor Property, Northern Quebec. Commerce Resources Corp.
- Smith, D.L. (2021). 2019 Exploration of the Niobium Claim Group Property, Quebec. Saville Resources. April 26, 2021.
- Woolley, A. and Kempe, D. (1989). Carbonatites: Nomenclature, Average Chemical Compositions, and Element Distribution. In Bell K. (ed.), Carbonatites, Genesis and Evolution (pp. 1-14). London: Unwin Hyman Ltd.
- Wright et al. (1998). Pyrochlore, mineralization, and glimmerite formation in the Eldor (Lake LeMoyne) carbonatite complex, Labrador Trough, Quebec, Canada. Proceedings of the 33rd Forum on the Geology of Industrial Minerals. Canadian Institute of Mining, Metallurgy, and Petroleum, Special Vol. 50, 205-213.